


### Overview

## Compaq Flat Panel Monitor TFT1720

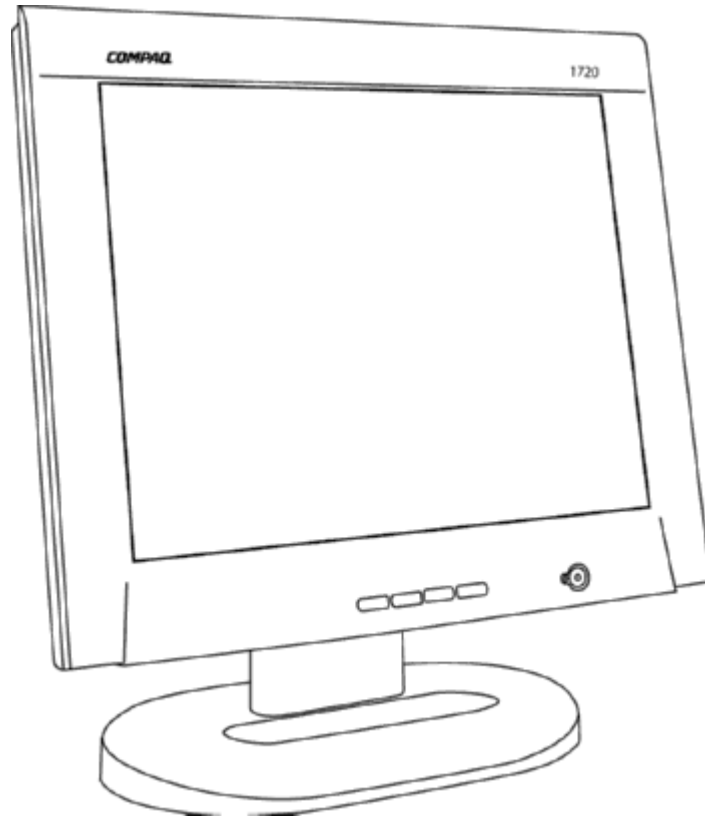

### Models

#### TFT1720 Flat Panel Monitor (Carbon/Silver)

NA

295926-003

ROW

D5064D

#### TFT1720M Flat Panel Monitor (Carbon/Silver) with PC Comm Station

NA (includes speaker, USB port, headphone)

301958-003

ROW (includes speaker, USB port, headphone)

D5064P

### Compatibility

The TFT1720 is compatible with platforms using the VESA standard video modes.

**NOTE:** Features are subject to change without notice.

### Technical Specifications

<b>Panel Type</b>	TFT large viewing angle	
<b>Liquid Crystal Display</b> (diagonal)	17 in (43.2 cm)	
<b>Viewable</b> (diagonal)	17 in (43.2 cm)	
<b>Screen Opening</b> (W x H)	13.4 x 10.7 in (34.0 x 27.2 cm)	
<b>Viewing Angle</b>	150° horizontal 140° vertical (10:1 CR)	
<b>Pixel Pitch</b>	0.264 mm	
<b>Signal Input</b> (Analog/Digital)	Analog 15-pin D-sub; digital DVI-D; dual input (VGA and DVI)	
<b>Contrast Ratio</b> (typical)	400:1	
<b>Response Time</b> (typical)	40 ms (rise + fall)	
<b>Brightness</b> (typical)	250 nits	
<b>Color Depth Support</b>	True color >16 million colors	
<b>Graphics Controller</b>	Genesis GM5020 or GM5120	
<b>Factory Present Modes</b>	13	
<b>Horizontal Frequency</b>	30 to 80 kHz	
<b>Vertical Frequency</b>	56 to 76 Hz	
<b>Graphic Preset Modes</b>	1280 x 1024 @ 60 Hz, 75 Hz	
<b>NOTE: All modes are non-interlaced unless specified otherwise.</b>	1024 x 768 @ 60 Hz, 75 Hz	
	800 x 600 @ 75 Hz, 60 Hz	
	640 x 480 @ 75 Hz, 60 Hz	
<b>Text Mode</b>	720 x 400 @ 70 Hz	
<b>Mac Compatible Modes</b>	1152 x 870 @ 75 Hz	
<b>NOTE: Adapter required.</b>	832 x 624 @ 75 Hz	
<b>Other Modes</b>	1152 x 900 @ 76 Hz	
<b>NOTE: Adapter may be required.</b>	640 x 350 @ 70Hz	
<b>User-Programmable Modes</b>	16	
<b>Anti-Glare/Anti-Static</b>	Yes/Yes	
<b>Plug and Play</b>	Yes	
<b>Icon Based On-Screen Display Controls</b>	Yes	
<b>User Controls</b>	<b>Front panel button functions</b>	Menu/(exit), Left, Right, Enter (Auto Adjust), Power LED
	<b>Brightness, Contrast</b>	Yes
	<b>Sizing, Positioning</b>	No/Yes
	<b>Color temperature</b>	Yes (5800k, 6500k, 9300k, User defined)
	<b>Full Screen 640 x 480, 800 x 600 Resolutions</b>	Yes
	<b>Monitor Management</b>	Power Saver (on/off), Mode Display (on/off), Serial Number, Sleep Timer, Basic Menu, Default Input, Cancel, Exit
	<b>Image Control</b>	Auto Adjust, Clock, Clock Phase

### Technical Specifications

	<b>Factory Reset</b>	Yes
<b>Agency Approvals/ Certifications</b>	<b>ISO 9241-3,7,8 VDT Guidelines Approval</b>	Yes
	<b>ISO 13406-2 Compliant</b>	Yes (Pixel Defect Guidelines)
	<b>MPR-II Compliant</b>	Yes
	<b>CISPR Requirements</b>	Yes
	<b>VCCI Approvals</b>	Yes
	<b>MIC (New Zealand) Requirements</b>	Yes
	<b>Canadian Requirements/CSA</b>	Yes
	<b>Australian ACA Approval</b>	Yes
	<b>German Ergonomic</b>	Yes, (TUV and GS Mark)
	<b>Taiwan BSMI Approval</b>	Yes
	<b>China CCIB/CCEE Approval</b>	Yes
	<b>S. Korean MIC Approval</b>	Yes
	<b>Nordic Approvals</b>	Yes (Nemko, Fimko, Demko, Semko)
	<b>Eastern European Approvals</b>	Yes
	<b>CE Marking</b>	Yes
	<b>TUV-Ergo</b>	Yes
	<b>FCC Approval</b>	Yes
	<b>Energy Star Compliant</b>	Yes
	<b>TCO 99</b>	Yes, (Emissions, Ergonomics, Environment)
	<b>PC2001 Compliant</b>	Yes
<b>PC99 Certified</b>	Yes	
<b>UL Listed</b>	Yes	
<b>Windows® Certification</b>	Microsoft® Windows 98, Microsoft Windows 2000, and Microsoft Windows XP	
<b>Language Selection</b>	<b>English</b>	Yes
	<b>Spanish</b>	Yes
	<b>French</b>	Yes
	<b>German</b>	Yes
	<b>Italian</b>	Yes
<b>Pixel Clock Speed</b>	140 MHz	
<b>Input Impedance</b>	75 ohms ± 2%	
<b>Power Supply ALS</b>	Auto-Ranging, 100 to 240 VAC; External Brick, 60 Hz	
<b>Maximum Power Rating</b>	< 40 W	
<b>Power Saving Mode</b>	< 3 W	
<b>Synch Input</b>	Separate synchronization (HSYNC/VSYNC); Composite synchronization, Synchronization on Green (SOG)	

### Technical Specifications

<b>PC Comm Station</b> (included with TFT1720M models)	<b>Audio Power</b>	>1.5W/Channel (5% THD)
	<b>Volume Control</b>	Yes
	<b>USB Hub</b> (1 port)	Yes
	<b>Microphone/Head Phone Jack</b>	Yes/Yes
<b>Kensington Lock- ready</b>	Yes	
<b>Accessories Included</b>	VGA cable, Universal Power adaptor, AC Power Cord, Comm Station Multimedia Kit (select models)	
<b>Height Adjustment</b>	Yes (2.5 in, 63 mm)	
<b>Pivot Rotation</b>	Yes, including Portrait software	
<b>Removable Base</b>	Yes	
<b>VESA External Mounting</b>	Yes (Standard 4 hole pattern 75 mm)	
<b>Tilt</b>	Yes (-5° to +20°)	
<b>Swivel</b>	No	
<b>Dimensions</b>	<b>With stand</b>	16.5 x 18.2 x 8.1 in (41.91 x 46.23 x 20.57 cm)
	<b>Without stand</b>	16.5 x 14.7 x 1.8 in (41.91 x 37.34 x 4.57 cm)
<b>Approximate Weight</b>	<b>With stand</b>	19.8 lb (9.0 kg)
	<b>Without stand</b>	9.0 lb (4.1 kg)
<b>Temperature</b>	<b>Operating</b>	50° to 95° F (10° to 35° C)
	<b>Non-operating</b>	14° to 140° F (-10° to 60° C)
<b>Humidity</b>	<b>Operating</b>	20% to 80%
	<b>Non-operating</b>	5% to 95%
<b>Warranty</b>	Three-year limited warranty parts, including backlight and on-site labor or 48 hour direct unit replacement.	
<b>Accessories Included</b>	Standard VGA Cable, AC Adapter, Stereo Speaker Cable (301958-003, D5064P Skus only)	

**NOTE:** Certain restrictions apply. Some terms vary depending on sales region. Consult the Customer Service Support Center for details.

© Copyright 2003 Hewlett-Packard Development Company, L.P.  
The information contained herein is subject to change without notice.

Microsoft and Windows are US registered trademarks of Microsoft Corporation.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.