


### Overview

**HP recommends Windows  
Vista™ Business**

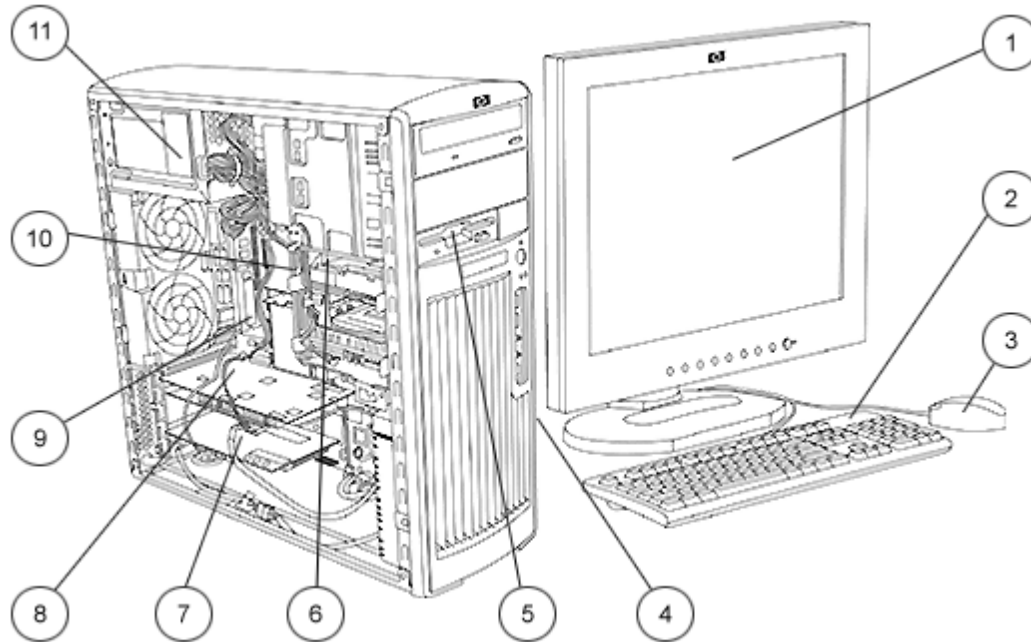

1. Monitor (sold separately)
2. 2004 Standard Keyboard
3. 2-Button Scroll Mouse
4. Front IO: 2 USB 2.0, IEEE-1394 (requires optional PCI card to enable), headphone and microphone
5. 3.5" external bay for optional diskette drive or other 3.5" device
6. 2 internal 3.5" bays, 2 external 5.25" bays
7. 4 PCI, 1 PCI Express 8x prime slots
8. 1 PCI Express x16 Graphics Bus
9. 6 USB 2.0, 1 standard serial port, 1 parallel port, 2 PS/2, 1 RJ-45, audio in/out
10. Dual 64-bit Intel® Xeon® processors
11. 500 watt power supply

### Overview

#### At A Glance

- 64-bit Intel® Xeon® processors
- Choice of operating systems: Genuine Windows XP Professional, Genuine Windows XP Professional x64 Edition, Red Hat Linux Workstation 4  
HP Linux Installer Kit (see <http://www.hp.com/workstations/software/linux/> for details)
- Up to 8 GB of DDR-2 memory
- PCI-Express I/O and graphics
- Integrated Broadcom NetXtreme Gigabit ethernet
- 800 MHz processor front side bus support
- Intel Hyper-Threading technology support
- SATA and Ultra 320 SCSI drives
- Digital AC97 integrated audio with internal speaker
- Pre-loaded Manageability tools
- Energy Star compliance with energy-saving features
- Protected by HP Services, including a 3-3-3 standard warranty. Terms and conditions vary by country. Certain restrictions and exclusions apply.

### Standard Features - Custom Components

#### Processor and Speed – 64-bit Intel Xeon Processor with 800 MHz Front Side Bus

One of the following

- 2.80 GHz (2 MB L2 cache)
- 3.00 GHz (2 MB L2 cache)
- 3.20 GHz (2 MB L2 cache)
- 3.40 GHz (2 MB L2 cache)
- 3.60 GHz (2 MB L2 cache)
- 3.80 GHz (2 MB L2 cache)

**2nd 64-bit Intel Xeon Processor with 800 MHz Front Side Bus** (optional – speed must match processor 1)

- 2.80 GHz (2 MB L2 cache)
- 3.00 GHz (2 MB L2 cache)
- 3.20 GHz (2 MB L2 cache)
- 3.40 GHz (2 MB L2 cache)
- 3.60 GHz (2 MB L2 cache)
- 3.80 GHz (2 MB L2 cache)

#### Operating System –

One of the following

Genuine Windows XP Professional

Genuine Windows XP Professional x64 Edition

(<http://www.hp.com/workstations/pws/windowsxp64/>)

Red Hat Linux Workstation 4

HP Installer Kit for Linux (includes drivers for both 32-bit & 64-bit OS versions)

**NOTE:** Although HP Personal Workstations can be ordered with the HP Installer Kit for Linux and an IEEE 1394 card, HP cannot provide customer support for this configuration. Please refer to the Linux Hardware Support Matrix ([http://www.hp.com/support/linux\\_hardware\\_matrix](http://www.hp.com/support/linux_hardware_matrix)) for details, and to the Linux User Manual ([http://www.hp.com/support/linux\\_user\\_manual](http://www.hp.com/support/linux_user_manual)) for tips on user-enablement of the IEEE 1394 Card.

#### 1st Hard Disk Drive –

One of the following

##### Serial ATA 3.0-Gb/s Hard Drives

(Currently supported only at 1.5-Gb/s. To get 3.0-Gb/s performance, a SATA 3.0-Gb/s controller must be added)

80 GB 7200 rpm Serial ATA drive (8 MB cache)

160 GB 7200 rpm Serial ATA NCQ drive (8 MB cache)

250 GB 7200 rpm Serial ATA drive (8 MB cache)

500 GB 7200 rpm Serial ATA NCQ drive (8 MB cache)

##### Serial ATA 1.5-Gb/s Hard Drives

74 GB 10K rpm Serial ATA drive (8 MB cache)

##### Ultra320 SCSI Hard Drives (SCSI Controller required)

73 GB 10K Ultra320 SCSI drive

146 GB 10K Ultra320 SCSI drive

300 GB 10K Ultra320 SCSI drive

36 GB 15K Ultra320 SCSI drive

#### Windows XP

#### Red Hat Linux

32-Bit, 64-Bit

WS3, WS4

32-Bit, 64-Bit

WS3, WS4

32-Bit, 64-Bit

WS3, WS4

32-Bit, 64-Bit

WS3, WS4

32-Bit, 64-Bit

WS3, WS4

32-Bit, 64-Bit

7.2, 7.3, WS3,  
WS4

32-Bit, 64-Bit

7.2, 7.3, WS3,  
WS4

32-Bit, 64-Bit

7.2, 7.3, WS3,  
WS4

32-Bit, 64-Bit

7.2, 7.3, WS3,  
WS4

### Standard Features - Custom Components

73 GB 15K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
-------------------------------	----------------	--------------------

#### 2nd Hard Disk Drive – Serial ATA 3.0-Gb/s Hard Drives \*\*

One of the following	2nd hard drive, 80 GB 7200 rpm Serial ATA drive (8 MB cache)	32-Bit, 64-Bit	WS3, WS4
	2nd hard drive, 160 GB 7200 rpm Serial ATA NCQ drive (8 MB cache)	32-Bit, 64-Bit	WS3, WS4
	2nd hard drive, 250 GB 7200 rpm Serial ATA drive (8 MB cache)	32-Bit, 64-Bit	WS3, WS4
	2nd hard drive, 500 GB 7200 rpm Serial ATA NCQ drive (8 MB cache)	32-Bit, 64-Bit	WS3, WS4

#### Serial ATA 1.5-Gb/s Hard Drives \*\*

2nd hard drive, 74 GB 10K rpm Serial ATA drive (8 MB cache)	32-Bit, 64-Bit	WS3, WS4
---	----------------	----------

#### Ultra320 SCSI Hard Drives \*\*\*

2nd hard drive, 73 GB 10K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
2nd hard drive, 146 GB 10K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
2nd hard drive, 300 GB 10K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
2nd hard drive, 36 GB 15K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
2nd hard drive, 73 GB 15K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4

#### NOTE:

\*\*May mix hard drive types. First hard drive must be a Serial ATA drive.

\*\*\* May mix hard drive types. SCSI Controller required. Mixed drive types not supported with Linux.

#### 3rd Hard Disk Drive – Serial ATA 3.0-Gb/s Hard Drives \*\*

One of the following	3rd hard drive, 80 GB 7200 rpm Serial ATA drive (8 MB cache)	32-Bit, 64-Bit	WS3, WS4
	3rd hard drive, 160 GB 7200 rpm Serial ATA NCQ drive (8 MB cache)	32-Bit, 64-Bit	WS3, WS4
	3rd hard drive, 250 GB 7200 rpm Serial ATA drive (8 MB cache)	32-Bit, 64-Bit	WS3, WS4
	3rd hard drive, 500 GB 7200 rpm Serial ATA NCQ drive (8 MB cache)	32-Bit, 64-Bit	WS3, WS4

#### Ultra320 SCSI Hard Drives \*\*\*

3rd hard drive, 73 GB 10K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
3rd hard drive, 146 GB 10K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
3rd hard drive, 300 GB 10K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
3rd hard drive, 36 GB 15K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4

### Standard Features - Custom Components

3rd hard drive, 73 GB 15K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
---	----------------	--------------------

**NOTE:**

\*\*May mix hard drive types. First hard drive must be a Serial ATA drive.

\*\*\* May mix hard drive types. SCSI Controller required. Mixed drive types not supported with Linux.

<b>Factory Integrated RAID*</b>	RAID 0 Configuration – Striped Array	32-Bit	Not supported
	RAID 1 Configuration – Mirrored Array	32-Bit	Not supported

\*NOTE: Requires 2 identical hard drives (speeds, capacity, interface). No Linux support. 64-Bit not supported with Serial ATA Drives.

<b>Drive controllers</b>	Integrated serial ATA controller	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	Optional Ultra 320 SCSI controller (required if HDs are SCSI) - basic	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	Optional U320 SCSI Controller - LSI 20320AR RAID 0,1 (required with SCSI HDDs)and external connector	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4

\*NOTE: Can be sold and used with 1 or 2 SATA drives as a stand alone controller (no SCSI HDD).

<b>Memory -</b>		<b>Windows XP</b>	<b>Red Hat Linux</b>
One of the following	256 MB DDR-2 PC2-3200 (400 MHz) ECC Registered (1 x 256 MB)	32-Bit, 64-Bit	7.2, 7.3
	512 MB DDR-2 PC2-3200 (400 MHz) ECC Registered (2 x 256 MB)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	1 GB DDR-2 PC2-3200 (400 MHz) ECC Registered (2 x 512 MB)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	2 GB DDR-2 PC2-3200 (400 MHz) ECC Registered (2 x 1 GB)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	2 GB DDR-2 PC2-3200 (400 MHz) ECC Registered (4 x 512 MB)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	3 GB DDR-2 PC2-3200 (400 MHz) ECC Registered (2 x 1 GB + 2 x 512 MB)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	4 GB DDR-2 PC2-3200 (400 MHz) ECC Registered (2 x 2 GB)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	4 GB DDR-2 PC2-3200 (400 MHz) ECC Registered (4 x 1 GB)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	6 GB DDR-2 PC2-3200 (400 MHz) ECC Registered (2 x 2 GB + 2 x 1 GB)	64-Bit	7.2, 7.3, WS3, WS4
	8 GB DDR-2 PC2-3200 (400 MHz) ECC Registered (4 x 2 GB)	64-Bit	7.2, 7.3, WS3, WS4

### Standard Features - Custom Components

Removable Storage		Windows XP	Red Hat Linux
	1.44 MB Diskette Drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	48X CD-ROM Drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	48X CD-RW Drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	16X DVD-ROM Drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	48X Combo CD-RW/DVD-ROM Drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	16X DVD+/-RW, Dual-Layer LightScribe	32-Bit	
	HP No Optical Drive Option	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
<hr/>			
2nd Removable Storage*		Windows XP	Red Hat Linux
	48X CD-RW Drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	16X DVD-ROM Drive**	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	48X Combo CD-RW/DVD-ROM Drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	16X DVD+/-RW, Dual-Layer LightScribe***	32-Bit	WS3, WS4
<p><b>NOTES:</b> *Can not order with No Optical Option. **Can not have two of the same in one workstation.            *** LightScribe software works with Windows only.</p>			
<hr/>			
Keyboard*** -		Windows XP	Red Hat Linux
One of the following	PS/2 Standard Keyboard	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	USB Standard Keyboard	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
<p><b>***NOTE:</b> Not supported in configurations which include both USB mouse and Linux nor PS/2 mouse and Linux.</p>			
<hr/>			
Mouse -		Windows XP	Red Hat Linux
One of the following	PS/2 2-Button Scroll Mouse	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	USB 2-Button Optical Scroll Mouse	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	USB 3-Button Optical Mouse	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4

### Standard Features - Custom Components

<b>Audio</b>	Integrated Digital AC97 audio with internal speaker		WS3 & WS4
	Sound Blaster® X-Fi™ XtremeMusic PCI	32-Bit, 64-Bit	Not supported
	HP Optical Drive Internal Audio Cable*	32-Bit, 64-Bit	WS3 & WS4
	<b>*NOTE:</b> Not available with No Optical Option nor with the Sound Blaster X-Fi card.		
<b>NIC</b>	Broadcom 5751 Netxtreme™ Gigabit PCIe NIC	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
<b>Graphics</b>		<b>Windows XP</b>	<b>Red Hat Linux</b>
	NVIDIA Quadro NVS 285 with TurboCache Technology PCI Express (128 MB, VGA & DVI) (Two of these graphics cards can be integrated in the factory or in addition to an NVIDIA Quadro NVS 440).	32-Bit, 64-Bit	WS3, WS4
	ATI FireGL V3100 PCI Express (128 MB)	32-Bit, 64-Bit	
	NVIDIA Quadro FX 540 PCI Express (128 MB)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	NVIDIA Quadro FX 1400 PCI Express (128 MB)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	ATI FireGL V5100 PCI Express (128 MB)	32-Bit, 64-Bit	
	NVIDIA Quadro NVS 440 PCI Express (256 MB) (Two of these graphics cards can be integrated in the factory or in addition to an NVIDIA Quadro NVS 285).	32-Bit, 64-Bit	
	NVIDIA Quadro FX 3450 PCI Express (256 MB)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
<b>Miscellaneous</b>	Solenoid lock and hood sensor	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	HP FireWire IEEE 1394a 3-Port PCI Card	32-Bit, 64-Bit	Not Supported
	Trusted Platform Module	32-Bit	
	HP 64-bit Transition Tool Kit	32-Bit, 64-Bit	
	HP Workstations Mouse Pad	N/A	N/A
<b>Software</b>	Symantec Norton AntiVirus (optional)*	32-Bit	
	CA eTrust 64-bit Anti-Virus Software	64-Bit	
	HP Performance Tuning Framework*	32-Bit, 64-Bit	
	Altiris Recovery*	32-Bit	
	HP Client Manager Software v6.0*	32-Bit	
	<b>* Not available with Linux Operating System</b>		

### Standard Features - Specs

Operating System (choice)	Microsoft Windows XP Professional
	Windows XP Professional x64 Edition ( <a href="http://www.hp.com/workstations/pws/windowsxp64/">http://www.hp.com/workstations/pws/windowsxp64/</a> )
	OR Red Hat Enterprise Linux Workstation 4
	OR HP Installer Kit for Linux (includes drivers for both 32-bit & 64-bit OS versions on HP xw8200, xw6200 and xw4200)
Form factor	Minitower
Color	Carbonite/Alloy metallic
System Board Form Factor	Non-standard ATX
Processor	Single or dual 64-bit Intel Xeon processors (Nocona) with Hyper-Threading Technology
CPU Bus Speed Supported	800 MHz FSB
Standard L2 Cache	2 MB L2 cache
Chipset	Intel E7525
Memory Expansion Slots	4 DIMM's
Memory Type Supported	DDR-2 (ECC registered)
Memory Speed Supported	DDR-2 Synch DRAM PC2-3200 (400 MHz) Registered ECC
Maximum Memory	8 GB (4 DIMMs slots, 2 GB DIMMs required to meet maximum configurations)
Network controller	Integrated Broadcom 5751 10/100/1000 for HP
Audio	Integrated AC'97 digital audio with S/PDif 6-channel pass-through, stereo microphone, and Yamaha XG Lite Softsynth support
PCI slots	4 PCI slots (full-height) 1 PCI Express (x8 mechanically, x4 electrically) 1 PCI Express x16 graphics
AGP slot	none
Bays	Total Bays = 5
Internal Bays	<ul style="list-style-type: none"> <li>Two 3.5 inch bays with acoustic dampening rail assemblies</li> </ul>
External Bays	<ul style="list-style-type: none"> <li>Two 5.25 inch full length 2003 mm maximum device depth (top bay is limited to 198 mm depth when optional smart cover solenoid lock is installed). Bottom bay can be converted to an internal 3.5 inch 3rd Hard Drive bay using optional bracket</li> <li>One 3.5 inch bay for optional floppy drive</li> </ul>
Parallel Port	1
Serial Port	1
Front I/O	2 USB 2.0, Headphone, Microphone, optional IEEE 1394 <b>NOTE:</b> Although HP Personal Workstations can be ordered with the HP Installer Kit for Linux and an IEEE 1394 card, HP cannot provide customer support for this configuration. Please refer to the Linux Hardware Support Matrix ( <a href="http://www.hp.com/support/linux_hardware_matrix">http://www.hp.com/support/linux_hardware_matrix</a> ) for details, and to the Linux User Manual ( <a href="http://www.hp.com/support/linux_user_manual">http://www.hp.com/support/linux_user_manual</a> ) for tips on user-enablement of the IEEE 1394 Card.
Rear I/O	6 USB 2.0, 1 standard serial port, 1 parallel port, PS/2 keyboard and mouse, 1 RJ-45 to integrated Gigabit LAN, Audio In, Audio Out, Mic In
USB Keyboard	Optional
USB Mouse	Optional
PS/2 Keyboard	1
PS/2 Mouse	1
Chassis Dimensions (H x W x D)	17.3 x 6.5 X 17.3 in (44.1 x 16.5 x 44.0 cm)



### Standard Features - Specs

System weight	Standard config – 35 lb	
Shipping weight	Varies by region	
Temperature	Operating	40° to 95° F (5° to 35° C)
	Non-operating	-40° to 140° F (-40° to 60° C)
Humidity	Operating	8% to 85%
	Non-operating	8% to 90%
Maximum Altitude (nonpressurized)	Operating	10,000 ft (3,000 m)
	Non-operating	30,000 ft (9,100 m)
Power Supply	500W wide-ranging, active Power Factor Correction	
Interfaces Supported	1 SATA interface (2 serial-ATA connectors), 1 EIDE interface (2 EIDE connectors) for optical drives, optional multi-bay interface	
Hard Drive Controller (PCI) Supported	Ultra160 or Ultra320, or SATA RAID, or Ultra320 RAID	
<b>Preinstalled Software</b>		
HP Client Manager Software v6.0*		
Altiris Local Recovery*		
Alert Standard Format specification*		
Norton AntiVirus 2004 (optional preinstall)*		
CD/DVD software dependent on optical drive choices		
* <a href="#">Not available on Linux</a>		

### Standard Features - Preconfigured Global Models

**xw6200X/XE2.8/B80/  
H1.0/285/dF/s**  
EN557AW#XXX  
(See Country Code Key at  
end of section.)

<b>Processor</b>	64-bit Intel Xeon processor 2.80 GHz 2 MB/800
<b>OS</b>	Genuine Windows XP Professional
<b>Cache Memory</b>	2 MB L2
<b>Memory</b>	1 GB (2x512MB) DDR2-400 ECC Registered
<b>Optical Drive</b>	16X DVD-ROM
<b>Hard Drive</b>	80 GB SATA 3.0-Gb/s 7200 rpm (1st)
<b>HDD Controller</b>	Serial ATA controller
<b>Floppy Drive</b>	1.44 MB 3.5" Floppy Drive
<b>Graphics</b>	NVIDIA Quadro NVS 285 with TurboCache Technology PCI Express included in base configuration.
<b>Mouse</b>	HP scroll mouse (PS/2)
<b>Keyboard</b>	Standard PS/2 Keyboard
<b>Other Integrated</b>	Broadcom 10/100/1000 GBIT LOM, and AC97 audio

**xw6200X/XE3.2+/B80/  
H1.0/285/dF/s**  
EN558AW#XXX  
(See Country Code Key at  
end of section.)

<b>Processor</b>	64-bit Intel Xeon processor 3.20 GHz 2 MB/800
<b>2nd Processor</b>	64-bit Intel Xeon processor 3.20 GHz 2 MB/800
<b>OS</b>	Genuine Windows XP Professional
<b>Cache Memory</b>	2 MB L2
<b>Memory</b>	1 GB (2x512MB) DDR2-400 ECC Registered
<b>Optical Drive</b>	16X DVD-ROM
<b>Hard Drive</b>	80 GB SATA 3.0-Gb/s 7200 rpm (1st)
<b>HDD Controller</b>	Serial ATA controller
<b>Floppy Drive</b>	1.44 MB 3.5" Floppy Drive
<b>Graphics</b>	NVIDIA Quadro NVS 285 with TurboCache Technology PCI Express included in base configuration.
<b>Mouse</b>	HP scroll mouse (PS/2)
<b>Keyboard</b>	Standard PS/2 Keyboard
<b>Other Integrated</b>	Broadcom 10/100/1000 GBIT LOM, and AC97 audio

### Standard Features - Preconfigured Global Models

**xw6200X/XE3.2+/S73b/  
H1.0/285/dF/p**  
EN559AW#XXX  
(See Country Code Key at  
end of section.)

<b>Processor</b>	64-bit Intel Xeon processor 3.20 GHz 2 MB/800
<b>2nd Processor</b>	64-bit Intel Xeon processor 3.20 GHz 2 MB/800
<b>OS</b>	Genuine Windows XP Professional
<b>Cache Memory</b>	2 MB L2
<b>Memory</b>	1 GB (2x512MB) DDR2-400 ECC Registered
<b>Optical Drive</b>	16X DVD-ROM
<b>Hard Drive</b>	73 GB SCSI 10k rpm (1st)
<b>HDD Controller</b>	U320 SCSI Controller (No RAID)
<b>Floppy Drive</b>	1.44 MB 3.5" Floppy Drive
<b>Graphics</b>	NVIDIA Quadro NVS 285 with TurboCache Technology PCI Express included in base configuration.
<b>Mouse</b>	HP optical scroll mouse (USB)
<b>Keyboard</b>	Standard USB Keyboard
<b>Other Integrated</b>	Broadcom 10/100/1000 GBIT LOM, and AC97 audio

**xw6200X/XE3.2+/D80/  
H2.0/285/d/s**  
EQ644AW#XXX  
(See Country Code Key at  
end of section.)

<b>Processor</b>	64-bit Intel Xeon processor 3.20 GHz 2 MB/800
<b>2nd Processor</b>	64-bit Intel Xeon processor 3.20 GHz 2 MB/800
<b>OS</b>	Genuine Windows XP Professional
<b>Cache Memory</b>	2 MB L2
<b>Memory</b>	2 GB (2x1GB) DDR2-400 ECC Registered
<b>Optical Drive</b>	16X DVD-ROM
<b>Hard Drive</b>	80 GB SATA 3.0-Gb/s 7200 rpm (1st)
<b>HDD Controller</b>	Serial ATA controller
<b>Floppy Drive</b>	None
<b>Graphics</b>	NVIDIA Quadro NVS 285 with TurboCache Technology PCI Express included in base configuration.
<b>Mouse</b>	HP scroll mouse (PS/2)
<b>Keyboard</b>	Standard PS/2 Keyboard
<b>Other Integrated</b>	Broadcom 10/100/1000 GBIT LOM, and AC97 audio

### Standard Features - Preconfigured Global Models

<b>xw6200X/XE3.2+/D80/ H2.0/285+/d/p</b> EQ646AW#XXX (See Country Code Key at end of section.)	<b>Processor</b>	64-bit Intel Xeon processor 3.20 GHz 2 MB/800
	<b>2nd Processor</b>	64-bit Intel Xeon processor 3.20 GHz 2 MB/800
	<b>OS</b>	Genuine Windows XP Professional
	<b>Cache Memory</b>	2 MB L2
	<b>Memory</b>	2 GB (2x1GB) DDR2-400 ECC Registered
	<b>Optical Drive</b>	16X DVD-ROM
	<b>Hard Drive</b>	80 GB SATA 3.0-Gb/s 7200 rpm (1st)
	<b>HDD Controller</b>	Serial ATA controller
	<b>Floppy Drive</b>	None
	<b>Graphics</b>	Dual NVIDIA Quadro NVS 285 with TurboCache Technology PCI Express Graphics cards included.
	<b>Mouse</b>	HP optical scroll mouse (USB)
	<b>Keyboard</b>	Standard USB Keyboard
	<b>Other Integrated</b>	Broadcom 10/100/1000 GBIT LOM, and AC97 audio

<b>xw6200X/XE3.4+/C74/ H2.0/285/dF/s</b> EN560AW#XXX (See Country Code Key at end of section.)	<b>Processor</b>	64-bit Intel Xeon processor 3.40 GHz 2 MB/800
	<b>2nd Processor</b>	64-bit Intel Xeon processor 3.40 GHz 2 MB/800
	<b>OS</b>	Genuine Windows XP Professional
	<b>Cache Memory</b>	2 MB L2
	<b>Memory</b>	2 GB (2x1GB) DDR2-400 ECC Registered
	<b>Optical Drive</b>	16X DVD-ROM
	<b>Hard Drive</b>	74 GB SATA 1.5-GB/S 10k rpm (1st)
	<b>HDD Controller</b>	Serial ATA controller
	<b>Floppy Drive</b>	1.44 MB 3.5" Floppy Drive
	<b>Graphics</b>	NVIDIA Quadro NVS 285 with TurboCache Technology PCI Express included in base configuration.
	<b>Mouse</b>	HP scroll mouse (PS/2)
	<b>Keyboard</b>	Standard PS/2 Keyboard
	<b>Other Integrated</b>	Broadcom 10/100/1000 GBIT LOM, and AC97 audio

### Standard Features - Preconfigured Global Models

<b>xw6200X/XE3.2+/D80/ H2.0/285+/d/p</b> EQ647AW#XXX (See Country Code Key at end of section.)	<b>Processor</b>	64-bit Intel Xeon processor 3.40 GHz 2 MB/800
	<b>2nd Processor</b>	64-bit Intel Xeon processor 3.40 GHz 2 MB/800
	<b>OS</b>	Genuine Windows XP Professional
	<b>Cache Memory</b>	2 MB L2
	<b>Memory</b>	2 GB (2x1GB) DDR2-400 ECC Registered
	<b>Optical Drive</b>	16X DVD-ROM
	<b>Hard Drive</b>	160 GB SATA 3.0-Gb/s 7200 rpm NCQ (1st)
	<b>HDD Controller</b>	Serial ATA controller
	<b>Floppy Drive</b>	1.44 MB 3.5" Floppy Drive
	<b>Graphics</b>	Dual NVIDIA Quadro NVS 285 with TurboCache Technology PCI Express Graphics cards included.
	<b>Mouse</b>	HP scroll mouse (PS/2)
	<b>Keyboard</b>	Standard PS/2 Keyboard
	<b>Other Integrated</b>	Broadcom 10/100/1000 GBIT LOM, and AC97 audio

<b>xw6200X/XE3.6+/C74/ H2.0/285/d/p</b> EQ648AW#XXX (See Country Code Key at end of section.)	<b>Processor</b>	64-bit Intel Xeon processor 3.60 GHz 2 MB/800
	<b>2nd Processor</b>	64-bit Intel Xeon processor 3.60 GHz 2 MB/800
	<b>OS</b>	Genuine Windows XP Professional
	<b>Cache Memory</b>	2 MB L2
	<b>Memory</b>	2 GB (2x1GB) DDR2-400 ECC Registered
	<b>Optical Drive</b>	16X DVD-ROM
	<b>Hard Drive</b>	74 GB SATA 1.5-GB/S 10k rpm (1st)
	<b>HDD Controller</b>	Serial ATA controller
	<b>Floppy Drive</b>	None
	<b>Graphics</b>	NVIDIA Quadro NVS 285 with TurboCache Technology PCI Express included in base configuration.
	<b>Mouse</b>	HP optical scroll mouse (USB)
	<b>Keyboard</b>	Standard USB Keyboard
	<b>Other Integrated</b>	Broadcom 10/100/1000 GBIT LOM, AC97 audio, and Serial ATA controller

### Standard Features - Preconfigured Global Models

<b>xw6200X/XE3.8+/C74/ H2.0/285+/dF/s EQ649AW#XXX</b> (See Country Code Key at end of section.)	<b>Processor</b>	64-bit Intel Xeon processor 3.80 GHz 2 MB/800
	<b>2nd Processor</b>	64-bit Intel Xeon processor 3.80 GHz 2 MB/800
	<b>OS</b>	Genuine Windows XP Professional
	<b>Cache Memory</b>	2 MB L2
	<b>Memory</b>	2 GB (2x1GB) DDR2-400 ECC Registered
	<b>Optical Drive</b>	16X DVD-ROM
	<b>Hard Drive</b>	74 GB SATA 1.5-GB/S 10k rpm (1st)
	<b>HDD Controller</b>	Serial ATA controller
	<b>Floppy Drive</b>	1.44 MB 3.5" Floppy Drive
	<b>Graphics</b>	Dual NVIDIA Quadro NVS 285 with TurboCache Technology PCI Express Graphics cards included.
	<b>Mouse</b>	HP scroll mouse (PS/2)
	<b>Keyboard</b>	Standard PS/2 Keyboard
	<b>Other Integrated</b>	Broadcom 10/100/1000 GBIT LOM, AC97 audio, and Serial ATA controller

### Country Code Key

<b>N. America</b>	#ABA	<b>Switzerland</b>	#AR8
		(German/French)	
<b>Fr. Canadian</b>	#ABC	<b>Switzerland (Italian/English)</b>	#ACN
<b>L. America</b>	#ABM	<b>Dutch</b>	#ABH
<b>Japan (English)</b>	#ACF	<b>Denmark</b>	#ACE
<b>Japan (Japanese)</b>	#ABJ	<b>Asia/Pacific (English)</b>	#AB4
<b>UK</b>	#ABU	<b>Korea</b>	#AB1
<b>Germany</b>	#ABD	<b>China</b>	#AB2
<b>France</b>	#ABF	<b>Taiwan</b>	#AB0
<b>Italy</b>	#ABZ	<b>India</b>	#ACJ
<b>Spain</b>	#ABE	<b>Australia</b>	#ABG
<b>Europe</b>	#AK6	<b>Thailand</b>	#AKL

### After-Market Options

Processors	2nd 64-bit Intel Xeon® processor with Hyper-Threading	Part Number
	64-bit Intel Xeon processor at 2.80 GHz with 800 MHz FSB & 1 MB of L2 cache	DY665A
	64-bit Intel Xeon processor at 2.80 GHz with 800 MHz FSB & 2 MB of L2 cache	EC421AA
	64-bit Intel Xeon processor at 3.00 GHz with 800 MHz FSB & 1 MB of L2 cache	DY666A
	64-bit Intel Xeon processor at 3.00 GHz with 800 MHz FSB & 2 MB of L2 cache	PQ903A
	64-bit Intel Xeon processor at 3.20 GHz with 800 MHz FSB & 1 MB of L2 cache	DY667A
	64-bit Intel Xeon processor at 3.20 GHz with 800 MHz FSB & 2 MB of L2 cache	PQ904A
	64-bit Intel Xeon processor at 3.40 GHz with 800 MHz FSB & 1 MB of L2 cache	DY668A
	64-bit Intel Xeon processor at 3.40 GHz with 800 MHz FSB & 2 MB of L2 cache	PQ905A
	64-bit Intel Xeon processor at 3.60 GHz with 800 MHz FSB & 1 MB of L2 cache	DY669A
	64-bit Intel Xeon processor at 3.60 GHz with 800 MHz FSB & 2 MB of L2 cache	PQ906A
	64-bit Intel Xeon processor at 3.80 GHz with 800 MHz FSB & 2 MB of L2 cache	PH202A

Graphics	Multi display solutions	PCI	PCI-Express	Windows XP	Red Hat Linux	Part Number
	NVIDIA Quadro NVS 280 (64 MB, VGA & DVI)	X		32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	AA932A
	NVIDIA Quadro NVS 400 (64 MB, quad head, VGA & DVI)	X		32-Bit, 64-Bit		AA605A
	NVIDIA Quadro NVS 285 with TurboCache Technology PCI Express (128 MB)		X	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	EE061AA
	NVIDIA DVI Dual-head Connector Cablefor NVS cards	X	X	32-Bit, 64-Bit		DL139A
	NVIDIA Quadro FX 330 (64 MB)		X	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	PB332A
	ATI FireGL V3100 (128 MB)		X	32-Bit, 64-Bit		PE949A
	NVIDIA Quadro FX 540 (128 MB)		X	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	PH791A
	NVIDIA Quadro FX 1400 (128 MB)		X	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	PM979A
	ATI FireGL V5100 (128 MB)		X	32-Bit, 64-Bit		PB330A
	NVIDIA Quadro NVS 440 PCI Express (256 MB)		X	32-Bit, 64-Bit		PT453A
	NVIDIA Quadro FX 3450 PCI Express (256 MB)		X	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	PY640AA

### After-Market Options

Hard Drives	Serial ATA Hard Drives (Currently supported only at 1.5Gb/s. To get 3Gb/s performance, a SATA 3.0Gb/s controller must be added)	Windows XP	Red Hat Linux	Part Number
	74 GB SATA 1.5GB/S Hard Drive (10,000 rpm)	32-Bit, 64-Bit	WS3, WS4	DX760A
	80 GB SATA 3.0Gb/s Hard Drive (7200 rpm)	32-Bit, 64-Bit	WS3, WS4	PY276AA
	160 GB SATA 3.0Gb/s NCQ Hard Drive (7200 rpm)	32-Bit, 64-Bit	WS3, WS4	PV944A
	250 GB SATA 1.5Gb/s NCQ Hard Drive (7200 rpm)	32-Bit, 64-Bit	WS3, WS4	EA788AA
	500 GB SATA 3.0Gb/s NCQ Hard Drive (7200 rpm)	32-Bit, 64-Bit	WS3, WS4	PV943A
	<b>SCSI Hard Drives</b>			
	73 GB Ultra320 SCSI Hard Drive (10,000 rpm)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	AA613A
	146 GB Ultra320 SCSI Hard Drive (10,000 rpm)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	AA614A
	300 GB Ultra320 SCSI Hard Drive (10,000 rpm)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DY672A
	36 GB Ultra320 SCSI Hard Drive (15,000 rpm)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	AA616A
	73 GB Ultra320 SCSI Hard Drive (15,000 rpm)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	AA617A
	146 GB Ultra320 SCSI Hard Drive (15,000 rpm)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DY671A
	<b>Hard Drive Accessories</b>			
	Bracket HDD 3.5to5.25 xw6200	N/A	N/A	DY659A
	Cable, 3 port SCSI xw4200/6200	N/A	N/A	DY661A
	<b>Removable Drive Enclosures</b>			
	StorCase DX115 SATA Removable Enclosure	All	All	EA332AA
	StorCase DX115 SATA/SAS Carrier Tray	All	All	RA697AA

Controllers	SCSI Controllers	PCI	PCI-X	Windows XP	Red Hat Linux	Part Number
	Adaptec Serial ATA 3Gb/s RAID 1420SA card		X	32-Bit, 64-Bit	WS3	ED090AA
	U320 SCSI Controller - LSI 20320AR RAID 0,1& external connector	X		32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DZ554A
	Ultra320 SCSI RAID Adaptec 2120S (Windows only, includes external connector)	X		32-Bit, 64-Bit		AA850A



### After-Market Options

Input Devices		Windows XP	Red Hat Linux	Part Number
<b>Keyboards</b>				
HP PS/2 Standard Keyboard (Carbonite/Silver)		32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DT527A
HP USB Standard Keyboard (Carbonite/Silver)		32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DT528A
HP USB Smart Card Keyboard		32-Bit, 64-Bit	Not Supported	ED707AA
Smartcard Adapter for Modular Keyboard		32-Bit, 64-Bit		DT531A
<b>Pointing Devices</b>				
HP PS/2 2-Button Scroll Mouse (Carbonite)		32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DD440B
HP USB 2-Button Optical Scroll Mouse (Carbonite/Silver)		32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DC172B
HP USB Optical 3-Button Mouse		32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DY651A
HP USB Optical 3-button 2.9M OEM Mouse			7.2, 7.3, WS3, WS4	ET424AA
USB Spaceball 5000		32-Bit, 64-Bit	Not Supported	DV675A
USB SpaceMouse		32-Bit, 64-Bit	Not Supported	DZ203A
HP SpacePilot 3D USB Intelligent Controller		32-Bit, 64-Bit	Not Supported	EF390AA

Networking	NICs	PCI	PCI-Express	Windows XP	Red Hat Linux	Part Number
	Intel Pro/1000 PT Gigabit PCIe NIC		X	32-Bit	WS3	EH352AA
	Intel Pro/1000 GT Gigabit PCI NIC		X	32-Bit	WS3, WS4	AG393AA
	Broadcom 5782 Netxtreme Gigabit PCI NIC	X		32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DC194A
	Broadcom 5751 Netxtreme Gigabit PCIe NIC		X	32-Bit, 64-Bit	WS3, WS4	EA833AA

Memory (DIMMs)	400 MHz DDR-2 PC2-3200 ECC Registered DIMMs	Windows XP	Red Hat Linux	Part Number
	256 MB DDR-2 PC2-3200 (400 MHz) ECC Registered	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DY656A
	512 MB DDR-2 PC2-3200 (400 MHz) ECC Registered	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DY658A
	1 GB DDR-2 PC2-3200 (400 MHz) ECC Registered	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DY655A
	2 GB DDR-2 PC2-3200 (400 MHz) ECC Registered	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DY657A

### After-Market Options

#### Monitors (Supported by TFTs

all Operating Systems offered by HP)	HP TFT LP2465 (24-inch)	EF224A5#
	HP TFT L2335 (23-inch)	P9615W#
	HP TFT LP2065 (20.1-inch) TCO03 Two Tone (Carbonate/Silver)	EF227A5#
	HP TFT L2035 (20.1-inch)	P9614W#
	HP TFT L1955 2T Top (19.1-inch)	PH466AT#
	HP TFT L1755 (17-inch)	PL777AA#

#### Multimedia

	PCI	PCI-Express
Adaptec Fireconnect 2100 Firewire 400 (1394a) PCI Card (Windows only)	X	PA997A

**NOTE:** Although HP Personal Workstations can be ordered with the HP Installer Kit for Linux and an IEEE 1394 card, HP cannot provide customer support for this configuration. Please refer to the Linux Hardware Support Matrix ([http://www.hp.com/support/linux\\_hardware\\_matrix](http://www.hp.com/support/linux_hardware_matrix)) for details, and to the Linux User Manual ([http://www.hp.com/support/linux\\_user\\_manual](http://www.hp.com/support/linux_user_manual)) for tips on user-enablement of the IEEE 1394 Card.

#### Multimedia

	Windows XP	Red Hat Linux	Part Number
SoundBlaster X-Fi XtremeMusic Audio Card	32-Bit	Not Supported EA326AA	EA326AA
HP Satellite Speakers			ZD929AA

#### Optical Drives

	Windows XP	Red Hat Linux	Part Number
<b>DVD-ROM Drive</b> 16X DVD-ROM w/ +R read	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	AA620B
<b>CD-ROM Drive</b> 48X Max CD-ROM Drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DC143B
<b>CD-RW Drive</b> 48X CD-RW Drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DE205B
<b>Combo Drive</b> 48X Combo DVD-ROM/CD-RW Drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DE206B
<b>DVD+/-RW Drive</b> 16X DVD+/-RW, Dual-Layer LightScribe (LightScribe labeling functionality not supported on Linux)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DZ555B

### After-Market Options

Removable Storage	Windows XP	Red Hat Linux	Part Number
HP 256-MB Drive Key II Flash Drive	32-Bit, 64-Bit	WS3, WS4	PH657A
HP 1-GB Drive Key II Flash Drive	32-Bit, 64-Bit	WS3, WS4	AG382AA
512 MB USB 2.0 Drive Key II	32-Bit, 64-Bit	WS3, WS4	ED516AA
1.44 MB Internal Floppy Drive	32-Bit, 64-Bit	WS3	DY670A
HP StorageWorks DAT 24 USB external tape drive	32-Bit, 64-Bit	WS3, WS4	DW070A
HP StorageWorks DAT 24 USB internal tape drive	32-Bit, 64-Bit	WS3, WS4	DW069A
HP StorageWorks DAT 40 USB external tape drive	32-Bit, 64-Bit	WS3, WS4	DW023A
HP StorageWorks DAT 40 USB internal tape drive	32-Bit, 64-Bit	WS3, WS4	DW022A
HP StorageWorks DAT 72 USB external tape drive	32-Bit, 64-Bit	WS3, WS4	DW027A
HP StorageWorks DAT 72 USB internal tape drive	32-Bit, 64-Bit	WS3, WS4	DW026A
HP StorageWorks DAT 72 SCSI external tape drive	32-Bit, 64-Bit	WS3, WS4, 7.2, 7.3	Q1523B
HP StorageWorks DAT 72 SCSI internal tape drive	32-Bit, 64-Bit	WS3, WS4, 7.2, 7.3	Q1522B

The following Removable Drive Enclosure products are available from and supported by 3rd party: StorCase Rhino Jr. SATA 1.5Gb/s Removable Disk Enclosure (For NA, use: HP P/N A466720, for WW, use: vendor P/N S21J111)

Security	Part Number
Chassis clamp lock, universal, no cable	DE817A
Chassis clamp lock, universal, with cable	DE818A

Brackets/Stand	Part Number
HP xw6200 sliding rack kit	DY663A
<ul style="list-style-type: none"> <li>Exclusively designed for the xw6200</li> <li>Standard-width, ball bearing sliding rails</li> <li>Includes hardware to work with IT racks only (not broadcast)</li> </ul>	

Other Devices	Part Number
Front Card Guide and Fan Kit	DY648A

Operating Systems	Part Number
Red Hat Enterprise Linux Workstation 3 Update 7 (32-bit version)	RA354AA
Red Hat Enterprise Linux Workstation 4 Update 1 (32/64-bit version)	EA700AA
Red Hat Enterprise Linux Workstation 4 Update 3 (32/64-bit version)	RA356AA

### After-Market Options

Software	Windows XP	Red Hat Linux	Part Number
HP Remote Graphics V3LTU for HP WS	32-Bit	7.2, 7.3, WS3, WS4	PY682AA
HP Remote Graphics V4 LTU for HP WS	32-Bit, 64-Bit	WS3, WS4	RG088AA
HP Remote Graphics V3 Receiver LTU	32-Bit	7.2, 7.3, WS3, WS4	PY684AA
HP Remote Graphics V4 Receiver LTU	32-Bit, 64-Bit	WS3, WS4	RG090AA
HP Remote Graphics V3 software media	32-Bit	7.2, 7.3, WS3, WS4	PY685AA
HP Remote Graphics V4 software media (available 8/1/06)	32-Bit, 64-Bit	WS3, WS4	RG091AA
HP Remote SW for HP 1 year Update Subscription	32-Bit	7.2, 7.3, WS3, WS4	PN681A
HP Remote SW Receiver 1 year Update Subscription	32-Bit	7.2, 7.3, WS3, WS4	PN680A

### Memory

#### E7525 chipset

#### DDR-2 SDRAM ECC REGISTERED MEMORY

If only using one DIMM, install it in socket 1. For more than one DIMM, install memory in pairs (a pair would be considered to be the DIMMs in sockets 1 & 2, 3 & 4) and do not mix speeds. It is always best to load the memory in pairs rather than a single DIMM (two 512 MB DIMMs will have better performance than a single 1 GB DIMM). Each pair of DIMMs must be the same size and same DRAM technology. The Intel E7525 chipset supports ECC Registered 400 MHz (PC2-3200) DDR-2 memory only.

#### MAXIMUM MEMORY

Supports up to 8 GB of DDR SDRAM


#### POSSIBLE MEMORY CONFIGURATIONS

*Not all memory configurations possible are represented below.*

DIMM Size	Slot			
	1	2	3	4
256 MB	256 MB			
512 MB	512 MB			
512 MB	256 MB	256 MB		
1 GB	1 GB			
1 GB	256 MB	256 MB	256 MB	256 MB
2 GB	1 GB	1 GB		
2 GB	512 MB	512 MB	512 MB	512 MB
4 GB	1 GB	1 GB	1 GB	1 GB
8 GB	2 GB	2 GB	2 GB	2 GB

## Storage

Tower configuration

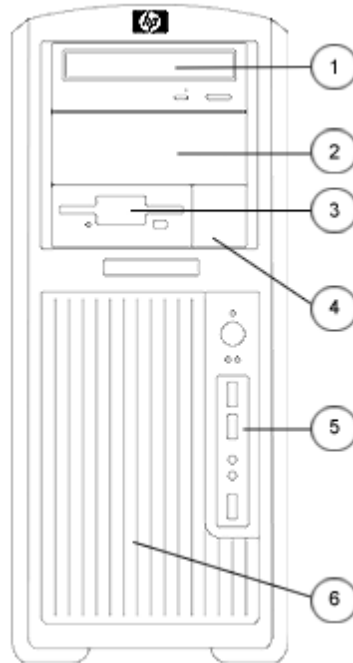

### Convertible Minitower

	Quantity Supported	Position Supported	Controller
Optional Diskette Drive	1	3	Diskette
5.25" Storage Drive Bays (position 1 drive bay is limited to 198 mm depth when optional smart cover solenoid lock is installed; position 2 drive bay can be converted to an internal 3.5" 3rd hard drive bay with optional bracket)	2	1, 2	IDE
3.5" Storage Drive Bays with acoustic dampening rail assemblies	2 (3)	4, 5 (and 2, for 3rd drive using optical bay)	SATA or optional SCSI Factory Integrated RAID*

\* **NOTE:** Factory Integrated RAID 0 Configuration (Striped Array) and RAID 1 Configuration (Mirrored Array) requires 2 hard drives with identical speeds, capacity and interface.

### Additional Technical Specifications

<b>System Board</b>	
Architecture	Xeon 64-bit/PCI-E
Chipset	Intel E7525/ICH5R Chipset
Super I/O Controller	SMSC LPC47B397
System Board Form Factor	ATX (slightly larger than standard ATX)
Processor Socket	Dual 604 Pin ZIF
DIMM Connectors (DDR2, 1.8V)	4
AGP Connector (1.5V)	None
Integrated Graphics	None
PCI Connectors (5.0V)	4 full length 33 MHz 32-bit
PCI Express Connectors	1 x16 1 x8 (with x4 electricals)
PCI card guide	Optional, tool-free support for all full-length cards with PCI extender
Flash ROM	Yes
AC97 integrated audio	Yes
CD ROM IN (Audio)	Yes
AUX IN (Audio)	Yes
Clear CMOS Button	Yes
CPU Fan Header	Yes
Chassis Fan Header	Yes
Chassis Speaker Header	Yes
CMOS Battery Holder – Lithium	Yes
Hood Lock Header	Yes
Hood Sensor Header	Yes
Multibay Header	Yes
Hard drive acoustic dampening rails	Standard in 2 internal 3.5" bays, tool-free
Integrated SATA RAID	<ul style="list-style-type: none"> <li>• RAID 0 and RAID 1</li> <li>• Supports one RAID array on 2 ports</li> <li>• Creation of 2 drive HDD array</li> <li>• RAID 0 Configuration - Striped Array</li> <li>• RAID 1 Configuration - Mirrored Array</li> </ul>
Integrated Broadcom	Yes
NetXtreme Gigabit Ethernet for HP	Yes
Wake-On-Lan®	Yes
ASF 1.0 (Alert Standard Format)	Yes
Power Supply Header	Yes

### *Additional Technical Specifications*

Power Switch, Power LED & Hard Drive LED Header	Yes
Password Clear Header	Yes
Riser Connector	None
HDD activity LED Header	Yes, 2 & 4 pin
PCI extender that connects to System Board	None



### Technical Specifications

<b>Cooling</b>	
Cooling Solutions Supported	Yes
Power Supply Fan (Variable Speed)	92 x 25 mm
Processor Fan-Heatsink (Variable Speed)	70 x 15 mm
Chassis Fan (front)	One 92 x 25 mm (optional)
Chassis Fan (rear)	Two 92 x 25 mm (standard)
Internal Speaker	Standard

<b>Power Supply</b>	
Full Ranging Input	Yes
Active Power Factor Correction (APFC) (Input Current is nearly 1/2 a non-APFC PS)	Yes
Passive Power Factor Correction (PFC)	No
Operating Voltage Range	90 - 264 VAC/118 VAC
Rated Voltage Range	100 – 240 VAC
Rated Line Frequency	50-60 Hz/400Hz
Operating Line Frequency Range	47 – 66 Hz/393 – 407Hz
Rated Input Current	9A/9A
Maximum Rated Power	500 W
Heat Dissipation	Typical 1228.9 btu/hr Maximum 1706 btu/hr
PS Size (wide x high x deep)	150 mm x 98 mm x 168 mm
Energy Star Compliant	Yes
FEMP Standby Power Compliant (<2W in S5 - Power Off)	No
Surge Tolerant Full Ranging Power Supply	Withstands power surges up to 2000V
Typical configuration power consumption	2 processors (2x3.6GHz Xeon), 1 GB memory (2x 512 MB) Two hard drives (2xSATA 40 GB), DVD-ROM drive PCI-Express Graphics Card (FX 1300) Floppy, Monitor
	<b>Input Power consumption @ 120Vac/60Hz</b>
Typical operating mode (system busy)	360 W = 1228.9 btu/hr
Windows XP Idle	201 W = 685.9 btu/hr
Hibernate mode (S4)	6.4 W = 21.84 btu/hr
Power Off (S5)	6.4 W = 21.84 btu/hr

ROM Features	Description
--------------	-------------

### Technical Specifications

Instantly Available PC	Allows for very low power consumption with quick resume time
ROM Based F10 Setup and diagnostics	Review and customize BIOS settings
Remote System Installation via F12 (PXE) (Remote Boot from Server)	Allows a new or existing system to boot over the network and download software, including the operating system
System/Emergency ROM Flash Recovery with Video	Recovers corrupted system BIOS
ROM revision levels	<ul style="list-style-type: none"> <li>Identifies system ROM revision levels and reports in ROM-based F10 setup</li> <li>Version is stored in an industry standard memory location (SMBIOS) so that management SW applications can use and report this information</li> </ul>
System board revision level	<ul style="list-style-type: none"> <li>Allows management SW to read the revision level of the system board</li> <li>Revision level is digitally encoded into the hardware and cannot be modified</li> </ul>
Auto Setup when New Hardware Installed	System automatically detects addition of new hardware
Serial, Parallel, USB, Audio, Network, Enable/Disable Port Control	Enable or disables serial, parallel, USB, audio, and network ports
Removable Media Write/Boot Control	Prevents ability to boot from removable media on supported devices (and can disable writes to media)
Power-On Password	Prevents an unauthorized person from booting up the computer
Setup Password	Prevents an unauthorized person from changing the system configuration
Replicated Setup	Saves BIOS settings to diskette or USB disk-on-key in human readable file. Repset.exe utility can then replicate these settings on machines being deployed without entering ROM-based F10 setup
Memory Change Alert (Requires HP Client Manager Software)	Alerts management console if memory is removed or changed
Thermal Alert (Requires HP Client Manager Software)	<p>Monitors the temperature state within the chassis. Three modes:</p> <ul style="list-style-type: none"> <li>NORMAL – normal temperature ranges</li> <li>ALERTED – excessive temperatures are detected. Raises a flag so action can be taken to avoid shutdown or provide for a smoother system shutdown</li> <li>SHUTDOWN – excessive temperatures are encountered. Automatically shuts down the computer without warning before hardware component damage occurs</li> </ul>
Master Boot Record Security	Detects changes to MBR and optional restoration, useful in protecting from viruses
Remote ROM Flash	Provides secure, fail-safe ROM image management from a central network console
Remote Wakeup/shutdown	<ul style="list-style-type: none"> <li>System administrators can power on, restart, and power off a client computer from a remote location.</li> <li>Enables cost-effective power consumption when the administrator needs to distribute software, perform security management, or update the ROM</li> </ul>
ACPI (Advanced Configuration and Power Management Interface)	<ul style="list-style-type: none"> <li>Allows the system to wake from a low power mode</li> <li>Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system</li> </ul> <p>Supports ACPI 2.0 for full compatibility with 64-bit operating systems</p>
Keyboard-less Operation	The system can be operated without a keyboard
SMBIOS	System Management BIOS 2.3.5, previously known as DMI BIOS, for system management information

### Technical Specifications

Localized ROM Setup	Common BIOS image supports configuration (Setup) in 11 languages, with local keyboard mappings
Asset tag	Allows user or MIS to set unique tag string in ROM
Ownership tag	Allows user or MIS to set unique tag string in ROM
Memory Scrubbing	Allows memory controller to transparently correct transient ECC errors in the background
Memory Remapping	Allows system memory lost to PCI devices to be reclaimed above 4 GB, for use with operating systems that support more than 4 GB (Windows XP 64-bit edition, Linux)
Per-slot control	Allows individual slot configuration (option ROM., latency)
Adaptive cooling	Fan control parameters are set according to detected hardware configuration for optimal acoustics
Pre-boot diagnostics	Early (pre-video) critical errors are reported via beeps and blinks on the power LED

<b>Other deployment &amp; management features</b>	
HP Client Management Solutions	<p>HP Client Management Solutions help simplify management of Workstations and significantly reduce total ownership costs. These solutions share a common design and are highly integrated due to the extensive work between HP and its partner Altiris.</p> <p>HP Client Manager Software is included free with all HP business PCs and Workstations. It enables central tracking, monitoring, and management of the hardware aspects of HP client systems:</p> <ul style="list-style-type: none"> <li>• Get valuable hardware information such as CPU, memory, video, and security settings</li> <li>• Monitor system health to fix problems before they occur</li> <li>• Install drivers and BIOS updates without visiting each PC</li> <li>• Remotely configure BIOS and security settings</li> <li>• Automate processes to quickly resolve hardware problems</li> </ul> <p>Additional Altiris solutions (fee-based) are available to address Workstation management challenges through the entire IT lifecycle including:</p> <ul style="list-style-type: none"> <li>• Inventory assessment</li> <li>• Software license compliance</li> <li>• Personality migration</li> <li>• Software image deployment</li> <li>• Software distribution</li> <li>• Asset management</li> <li>• Client backup and recovery</li> <li>• Problem resolution</li> </ul> <p>Visit <a href="http://www.hp.com/go/easydeploy">http://www.hp.com/go/easydeploy</a> for more information, to download HP Client Manager Software, and to evaluate the Altiris solutions.</p>
System Software Manager (free)	A free utility that detects and updates BIOS, device drivers, and management agent versions on your networked PCs and workstations
Altiris Local Recovery	Provides data and system file protection for HP business PCs to enable fast recovery of information that is accidentally deleted or if the system becomes corrupted. Designed for disconnected or seldom-connected users, Local Recovery protects your HP computer's data and system state by taking scheduled snapshots, which are then stored in a protected area on the local hard disk. System backup and disaster recovery is now simple and fast for all users, regardless of connectivity
Replicated Setup	Saves BIOS settings to diskette or USB disk-on-key in human readable file. Repset.exe utility can then replicate these settings on machines being deployed without entering ROM-based F10 setup
Software Restore CD	Restores computer to its original factory shipping image

### Technical Specifications

Asset Tag	<ul style="list-style-type: none"> <li>Repository for storing company-specific property asset numbers for easy tracking</li> <li>Initially set equal to the system serial number</li> <li>Stored in a protected section of non-volatile memory that can be accessed and modified with the F10 Setup program</li> </ul>
DIMM Serial Presence Detect	Detects whether or not memory DIMMs are present and their type
Hard drive serial number, model, and manufacturer	Hard drive manufacturer, model, and serial number is stored in the hard drive firmware and reported in ROM-based F10 setup
System serial number, model, & manufacturer	System serial number, model, & manufacturer stored in a non-volatile memory and can be retrieved with management SW or viewed in ROM-based F10 setup
ROM revision levels	Identifies system ROM revision levels and reports in ROM-based F10 setup Version is stored in an industry standard memory location (SMBIOS) so that management SW applications can use and report this information
Memory Change Alert (Requires HP Client Manager Software)	Alerts management console if memory is removed or changed
Ownership Tag	A user-defined string stored in non-volatile memory that is displayed in the BIOS splash screen
Hard drive interface Integrity Monitoring (CRC Checking)	<p>A feature of SATA and SCSI, Cyclic Redundancy Checking provides data transfer verification and proactive notification of hard drive data transmission problems with recommendations for enhancing system performance. It detects all the following errors' types:</p> <ul style="list-style-type: none"> <li>single bit errors</li> <li>double bit errors</li> <li>an odd number of errors</li> <li>error bursts up to 32-bits long</li> </ul>
Drive Self Tests (DPS)	<ul style="list-style-type: none"> <li>Drive Protection System (Adaptec and LSI SCSI controllers do not offer DPS)</li> <li>A diagnostic hard drive self test. It scans critical physical components and every sector of the hard drive for physical faults and then reports any faults to the user.</li> <li>Running independently of the operating system, it can be accessed through the computer's setup procedure. It produces an evaluation on whether the hard drive is the source of the problem and needs to be replaced.</li> </ul> <p>The system expands on the Self-Monitoring, Analysis, and Reporting Technology (SMART), a continuously running systems diagnostic that alerts the user to certain types of failures DPS Access through F10 Setup during Boot (F10 diagnostic access not available with SCSI drives)</p>
SMART Technology (Self-Monitoring, Analysis and Reporting Technology)	<p>Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count By avoiding actual hard drive failures, SMART hard drives act as "insurance" against unplanned user downtime and potential data loss from hard drive failure</p> <p>SMART I – Drive Failure Prediction SMART II – Off-Line Data Collection SMART III – Off-Line Read Scanning with Defect Reallocation</p>

### Technical Specifications

<b>Security Features</b>	
Access panel key lock (standard)	Prevents removal of the access panel and all internal components including optical and floppy drives
Smart Cover solenoid lock (optional)	Prevents removal of the access panel and all internal components including optical and floppy drives. Eliminates the need for a physical key by enabling password-protected locking & unlocking by a local or remote user.
Padlock (optional)	Prevents entire system theft and discourages access panel removal. 7mm diameter padlock loop at rear of system.
Kensington Cable Lock (optional)	Prevents entire system theft only. 3mm x 7mm slot at rear of system.
Universal chassis clamp lock (optional)	The version without a cable discourages access panel removal and prevents theft of IO devices. The version with a cable additionally prevents entire system theft and allows multiple systems to be secured with a single cable.
Intrusion Sensor (optional)	Notifies a local or remote user when the chassis access panel has been opened.

<b>Serviceability Features of System</b>	
Access panel	Tool-less, one-handed
Optical drives	Tool-less
Floppy drive	Tool-less
Hard drives	Tool-less
Expansion cards	Tool-less
Chassis fan removal	Tool-less
Green user touch points	Yes, on tool-free internal chassis mechanisms
Color-coordinated cables and connectors	Yes
Memory	Tool-less, can be upgraded without removing any internal components
CPUs	Tool-less, can be upgraded without removing any internal components
Power supply diagnostic LED	Yes, dual function: AC OK & power OK
Power Button	Yes, ACPI multi-function
Power LED	Yes, dual color LED indicates normal operation and faults.
Hard drive activity LED	Yes
Internal speaker	Yes, used for pre-boot diagnostic beep codes
Dual Color Power and HD LED on Front of Computer (Indicates Normal Operations and Fault Conditions)	green – normal red – fault
System/Emergency ROM Flash Recovery with Video	Recovers corrupted system BIOS.
Configuration Record SW	Yes
Over-Temp Warning on Screen (Requires IM Agents)	Yes
OS CD (Restore OS CD)	Restores computer to its original factory shipping image
Restore CD	Restores the computer to its original factory shipping image
Flash ROM	Yes

### Technical Specifications

3.3V Aux Power LED on System PCA	Yes
Dual Function 5V Aux Power LED (ON)/PS_ON LED (OFF) on System PCA	Yes
Diagnostic Power Switch LED on board	Yes
Clear Password Jumper	Yes
Clear CMOS Button	Yes
CMOS Battery Holder for easy Replacement	Yes
Processor ZIF Socket for easy Upgrade	Yes
DIMM Connectors for easy Upgrade	Yes
NIC LEDs (integrated) (Green & Amber)	Used to determine NIC status
ASF 1.0 support (Alert Standard Format)	Industry-standard specification for network alerting in operating system-absent environments
Dual function front power switch	Also acts as a reset switch when held for 4 seconds

<b>Service and Support</b>	On-site Warranty and Service ( <a href="#">Note 1</a> ): This three-year, limited warranty and service offering delivers three years of on-site, next business-day ( <a href="#">Note 2</a> ) service for parts and labor and includes free telephone support ( <a href="#">Note 3</a> ) 24 x 7. Global coverage ( <a href="#">Note 2</a> ) ensures that any product purchased in one country and transferred to another, non-restricted country will remain fully covered under the original warranty and service offering.
	<b>NOTE 1:</b> Terms and conditions may vary by country. Certain restrictions and exclusions apply.
	<b>NOTE 2:</b> On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.
	<b>NOTE 3:</b> Technical telephone support applies only to HP-configured, HP and HP-qualified, third-party hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries.

### Technical Specifications - Audio

<b>AC97 Integrated ADI 1981B Audio</b>	<b>Type</b>	Integrated
	<b>AC '97 Stereo Codec</b>	Yes
	<b>FM Synthesis Support</b>	Yes – Yamaha XG Lite
	<b>OPL3 FM Synthesis Support</b>	Yes
	<b>Sound Blaster Compatibility</b>	Yes
	<b>Audio Jacks</b>	Microphone-In (20-K ohm Input Impedance); rear stereo and front analog microphone ports Line-In (12-K ohm Input Impedance) Line-Out * (less than 800 ohms Output Impedance, expects at least a 10-K ohm load) Headphone-Out (2.5 Ohms Output Impedance, expects at least a 32 ohm load)
		<b>NOTE:</b> *Internal Speaker Amplifier is for Internal Speaker only. External Speakers need to be powered externally.
	<b>Sampling</b>	7 kHz – 48 kHz
	<b>Wavetable Syntheses (software)</b>	Yes – GM and FM Midi Support, Direct Music and Down Loadable Soundset (4 Meg DLS Level 1 and 2 Support)
	<b>3D Positional Sound</b>	No
	<b>Digital Audio</b>	Yes
	<b>Analog Audio</b>	Yes
	<b>Number of Channels on Line-Out (mono/stereo)</b>	Stereo (Left & Right channels)
	<b>Internal Audio Speaker Power Rating</b>	3W
	<b>Internal Speaker</b>	Yes
	<b>Hardware Equalizer for Internal Speaker</b>	Fixed 7 Band ParametricEQ
	<b>External Speaker Jack (Line-Out)</b>	Yes
<b>Sound Blaster X-Fi XtremeMusic Audio Card (Windows XP Only)</b>	<b>Audio Quality</b>	Total Harmonic Distortion + Noise at 1kHz (20kHz Low-pass filter) = 0.004%
	<b>Signal to Noise Ratio (SNR)</b>	Signal-to-Noise Ratio (20kHz Low-pass filter, A-Weighted) <ul style="list-style-type: none"> <li>• Stereo Output: 109dB</li> <li>• Front and Rear Channels: 109dB</li> <li>• Center, Subwoofer and Side Channels: 109dB</li> </ul>
	<b>Sound Conversion</b>	24-bit Analog-to-Digital conversion of analog inputs at 96kHz sample rate 24-bit Digital-to-Analog conversion of digital sources at 96kHz to analog 7.1 speaker output 24-bit Digital-to-Analog conversion of stereo digital sources at 192kHz to stereo output
	<b>Recording/Sampling Rate</b>	44.1, 48 and 96kHz

### Technical Specifications - Audio

<b>ASIO 2.0 support</b>	16-bit/44.1kHz, 16-bit/48kHz, 24-bit/44.1kHz 24-bit/48kHz and 24-bit/96kHz with direct monitoring
<b>Enhanced SoundFont support</b>	up to 24-bit resolution 24-bit/96kHz
<b>DACs</b>	24-bit/192kHz
<b>Voice Support</b>	128 voices
<b>Max. Channels in 3D Positional Audio</b>	7.1
<b>EAX® ADVANCED HD™ 5.0 support</b>	Yes including EAX® MacroFX™, EAX® PurePath™ and Environment FlexiFX™
<b>Connectors</b>	FlexiJack (Performing a 3-in-1 function, Digital In / Line In / Microphone) via 3.50 mm minijack Line level out (Front / Rear / Center / Subwoofer / Rear Center) via 3.50 mm minijacks AUX_IN line-level analog input via 4-pin Molex connector on card One AD_Link (26 pin) connector for linking to the X-Fi I/O Console (upgrade option)
<b>Dimensions</b>	7.25 x 5 x 0.9 in (18.42 x 12.7 x 2.29 cm)
<b>Additional product features</b>	<p><b>Movies</b></p> <ul style="list-style-type: none"> <li>THX Certification</li> <li>Dolby Digital EX 6.1 Playback</li> <li>DTS-ES 6.1 Playback</li> </ul> <p><b>Music</b></p> <ul style="list-style-type: none"> <li>X-Fi 24-bit Crystalizer</li> <li>CMSS-3D</li> <li>SuperRip</li> </ul> <p><b>Audio Creation</b></p> <ul style="list-style-type: none"> <li>Pristine audio playback quality with a near transparent SRC engine</li> <li>Up to eight 24 bit hardware effects</li> <li>ASIO recording with latency as low as one millisecond</li> <li>24-bit SoundFont® sampling</li> <li>3D MIDI</li> </ul> <p><b>Gaming</b></p> <ul style="list-style-type: none"> <li>EAX ADVANCED HD 5.0</li> </ul> <p><b>Software Bundle</b></p> <ul style="list-style-type: none"> <li>Doom 3 Sound Blaster EAX patch</li> <li>Entertainment Mode</li> <li>Audio Creation Mode</li> <li>Game Mode</li> <li>Mode Switcher</li> <li>Audio Console</li> <li>Creative MediaSource</li> <li>Creative MediaSource DVD-Audio Player</li> <li>DTS Neo:6 Settings</li> <li>Karaoke Player</li> <li>Entertainment Center</li> <li>Smart Recorder</li> <li>SoundFont Bank Manager</li> <li>Speaker Connection Wizard</li> <li>THX Setup Console</li> <li>Vienna SoundFont Studio</li> <li>Volume Panel</li> <li>WaveStudio</li> </ul>



### Technical Specifications - Audio

<b>Minimum System Requirements</b>	<b>System RAM</b>	Console Launcher Creative Media Toolbox Creative Diagnostics
	<b>Hard Disk</b>	256 MB 600MB free space Available PCI 2.1 slot for the audio card CD-ROM/CD-RW or CD/DVD-ROM required for software installation
	<b>Operating System</b>	Microsoft Windows XP Service Pack 2 (SP2)

---

### Technical Specifications - Communications

<b>Broadcom BCM5751 NetXtreme Gigabit Ethernet Controller (PCIe)</b>	<b>Connector</b>	RJ-45
	<b>Controller</b>	Broadcom 5751 PCI-E 1.0a LAN Controller
	<b>Memory</b>	Integrated 96Kb frame buffer memory
	<b>Data rates supported</b>	10/100/1000 Mbps
	<b>Compliance</b>	IEEE 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
	<b>Bus architecture</b>	PCI-E 1.0a
	<b>Data path width</b>	X1
	<b>Data path speed</b>	2.5Gbit per sec per direction transfer rate
	<b>Data transfer mode</b>	Bus-master DMA
	<b>Hardware certifications</b>	FCC class B, NRTL Mark Canada and United States, C-Tick for Australia, BSMI for Taiwan, VCCI for Japan, MIC for Korea, GOST for Russia
	<b>Power requirement</b>	3.1 watts @ +3.3V AUX supply
	<b>Boot ROM support</b>	Yes
	<b>Network transfer rate</b>	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T, 1000 Mbps
	<b>Environmental</b>	<b>Operating temperature</b> 32° to 131° F (0° to 55° C) <b>Operating humidity</b> 85% at 131° F (55° C)
	<b>Dimensions</b>	4.4 x 2.2 x 0.08 in (11.2 x 5.5 x 0.2 cm)
	<b>Operating system driver support</b>	Microsoft Windows 2000 and XP, Red Hat Linux 7.2, 7.3 and Red Hat Enterprise Linux 3
	<b>Management capabilities</b>	WOL, PXE , Remote cable management
<b>Alerting</b>	ASF 2.0	
<b>Kit contents</b>	Broadcom 5751, CD, Broadcom 5751 Netxtreme Gigabit PCIe NIC, drivers, quick install guide, product warranty statement	

### Technical Specifications - Communications

<b>Intel Pro/1000 MT Gigabit PCI NIC</b>	<b>Connector</b>	RJ-45
	<b>Controller</b>	Intel 82540EM Gigabit Controller
	<b>Memory</b>	Integrated 96Kb frame buffer memory
	<b>Data rates supported</b>	10/100/1000 Mbps
	<b>Compliance</b>	IEEE 802.1A, 802.1P, 802.1P, 802.1Q, 802.2, 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
	<b>Bus architecture</b>	PCI 2.2
	<b>Data path width</b>	32-bit, 33/66 MHz bus interface
	<b>Data transfer mode</b>	Bus-master DMA
	<b>Hardware certifications</b>	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union
	<b>Power requirement</b>	1.48 watts @ +3.3V AUX supply with 5V tolerance
	<b>Boot ROM support</b>	Yes
	<b>Network transfer rate</b>	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T, 1000 Mbps
	<b>Environmental</b>	<b>Operating temperature</b> 32° to 131° F (0° to 55° C) <b>Operating humidity</b> 85% at 131° F (55° C)
	<b>Dimensions</b>	6.4 x 4.8 x 0.8 in (16.3 x 12.1 x 1.9 cm)
	<b>Operating system driver support</b>	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux
	<b>Management capabilities</b>	ACPI, WOL and DMI 2.0, PXE 2.0, WfM 2.0, Intel PROset II utility
	<b>Kit contents</b>	Intel Pro/1000 MT Gigabit PCI NIC, CD containing Intel PROset II NIC drivers, quick install guide, product warranty statement

### Technical Specifications - Controllers

<b>U320 SCSI Controller - LSI 20320AR RAID 0,1 including external connector</b> (required with SCSI HDDs)	<b>Bus architecture</b>	PCI-X (backward compatible with PCI)
	<b>Number of supported devices</b>	Up to 15 SCSI devices
	<b>Interface protocol</b>	64 bit, 133MHz PCI-X
	<b>Host bus transfer rate</b>	Up to 1MB/s
	<b>SCSI data transfer rate</b>	Up to 320 MB/s per channel
	<b>SCSI Bus</b>	Wide Ultra320, Low Voltage Differential, and Ultra Wide Single-Ended
	<b>Internal connector</b>	68-pin HD
	<b>External connector</b>	68 pin
	<b>Total connectors</b>	2
	<b>Plug and Play Support</b>	No
	<b>Dimensions (H x L)</b>	6.6 x 2.5 in (16.9 x 6.4 cm)
	<b>Approvals</b>	CE, VCCI, Canada, C-Tick, FCC class B, UL 94VO
	<b>Operating system support</b>	Microsoft Windows XP Professional Windows XP Professional x64 Edition
	<b>Kit contents</b>	Controller card, driver CD, LED cables, user documentation and warranty card.

<b>Adaptec SCSI RAID 2120S Card</b>	<b>Dimensions (H x D)</b>	2.5 x 6.6 in (6.4 x 16.8 cm) Low profile card
	<b>RAID level</b>	0, 1, 10, 5, 50, JBOD
	<b>Data Transfer Rate</b>	Up to 320 MB/s
	<b>Cache Memory</b>	64 MB (onboard)
	<b>Device Support</b>	Up to 15 SCSI devices
	<b>Bus Type</b>	64-bit/66 MHz PCI (Also support 32-bit/33 MHz PCI)
	<b>Internal Connectors</b>	One 68-pin high-density
	<b>External Connectors</b>	One 68-pin VHDCI
	<b>System Requirements</b>	Intel PC or equivalent with available PCI slot
	<b>Operating Temperature</b>	32° to 131° F (0° to 55° C)
	<b>Power Requirements</b>	4 amps @ +5V
	<b>Operating System Support</b>	Windows 2000 Professional, Windows XP Professional, Windows XP Professional x64 Edition
	<b>Other</b>	Optimized disk utilization Online RAID Level Migration Online capacity expansion Immediate RAID availability (background initialization) S.M.A.R.T. support
	<b>Kit Contents</b>	Controller card, driver CD, LED cables, user documentation and warranty card.

## Technical Specifications - Hard Drives

<b>Serial ATA 3.0-Gb/s Hard Drives</b>	<b>500 GB</b>	<b>Capacity</b>	500,107,862,016 bytes			
		<b>Height</b>	1.0 in (2.54 cm)			
		<b>Width</b>	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)			
		<b>Interface</b>	Serial ATA (3.0 Gb/s), Native Command Queuing enabled			
		<b>Synchronous Transfer Rate (Maximum)</b>	Up to 3 Gb/s			
		<b>Buffer</b>	16 MB			
		<b>Seek Time (typical reads, includes controller overhead, including settling)</b>	<b>Single Track</b>	1.3 ms		
			<b>Average</b>	20.0 ms		
			<b>Full-Stroke</b>	30 ms		
		<b>Rotational Speed</b>	7,200 rpm			
		<b>Logical Blocks</b>	976,773,168			
		<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)			
			<b>250 GB</b>	<b>Capacity</b>	250,059,350,016 bytes	
				<b>Height</b>	1 in (2.54 cm)	
	<b>Width</b>	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)				
	<b>Interface</b>	Serial ATA (3.0 Gb/s)				
	<b>Synchronous Transfer Rate (Maximum)</b>	Up to 3 Gb/s				
	<b>Buffer</b>	8 Mbytes				
	<b>Seek Time (typical reads, includes controller overhead, including settling)</b>	<b>Single Track</b>		1.0 ms		
		<b>Average</b>		8.5 ms		
		<b>Full-Stroke</b>		18 ms		
	<b>Rotational Speed</b>	7,200 rpm				
	<b>Logical Blocks</b>	488,397,168				
	<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)				

### Technical Specifications - Hard Drives

<b>160 GB</b>	<b>Capacity</b>	163,928,604,672 bytes	
	<b>Height</b>	1.0 in (2.54 cm)	
	<b>Width</b>	Media diameter: 3.5 in (8.89 cm)	
		Physical size: 4 in (10.2 cm)	
	<b>Interface</b>	Serial ATA (3.0 Gb/s)	
	<b>Synchronous Transfer Rate (Maximum)</b>	Up to 3 Gb/s	
	<b>Buffer</b>	8 Mbytes	
	<b>Seek Time (typical reads, includes controller overhead, including settling)</b>	<b>Single Track</b>	0.9 ms
		<b>Average</b>	9.3 ms
		<b>Full-Stroke</b>	18 ms
	<b>Rotational Speed</b>	7,200 rpm	
	<b>Logical Blocks</b>	320,173,056	
	<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	
<b>80 GB</b>	<b>Capacity</b>	80,026,361,856 bytes	
	<b>Height</b>	1.0 in (2.54 cm)	
	<b>Width</b>	Media diameter: 3.5 in (8.89 cm)	
		Physical size: 4 in (10.2 cm)	
	<b>Interface</b>	Serial ATA (3.0 Gb/s)	
	<b>Synchronous Transfer Rate (Maximum)</b>	Up to 3 Gb/s	
	<b>Buffer</b>	8 MB	
	<b>Seek Time (typical reads, includes controller overhead, including settling)</b>	<b>Single Track</b>	2 ms
		<b>Average</b>	9.3 ms
		<b>Full-Stroke</b>	21 ms
	<b>Rotational Speed</b>	7,200 rpm	
	<b>Logical Blocks</b>	156,301,488	
	<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	

### Technical Specifications - Hard Drives

<b>Serial ATA 1.5-Gb/s Hard Drives</b> (10,000 rpm)	<b>74 GB</b>	<b>Capacity</b>	74,355,769,344 bytes	
		<b>Height</b>	1.0 in (2.54 mm)	
		<b>Width</b>	Media diameter: 3.3 in (84mm) Physical size: 4 in (10.2 cm)	
		<b>Interface</b>	Serial ATA	
		<b>Synchronous Transfer Rate</b> (Maximum)	150 MB/s	
		<b>Buffer</b>	8 MB	
		<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.3 ms
			<b>Average</b>	4.5 ms
			<b>Full-Stroke</b>	10.2 ms
		<b>Rotational Speed</b>	10,000 rpm	
		<b>Logical Blocks</b>	145,226,112	
		<b>Operating Temperature</b>	41° to 140° F (5 to 60° C)	

---

<b>Ultra320 SCSI Hard Drives</b> (10,000 rpm)	<b>73 GB</b>	<b>Capacity</b>	73,407,865,856 bytes	
		<b>Height</b>	1.0 in (2.54 cm)	
		<b>Width</b>	3.5 in (8.9 cm)	
		<b>Interface</b>	68 pin LVD SCSI	
		<b>Synchronous Transfer Rate</b> (Maximum)	320 MB/s	
		<b>Buffer</b>	8 Mbytes	
		<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.3 msec
			<b>Average</b>	<4.5 msec
			<b>Full-Stroke</b>	<11.0 msec
		<b>Rotational Speed</b>	10,000 rpm	
		<b>Logical Blocks</b>	143,374,738	
		<b>Operating Temperature</b>	40° to 130° F (5° to 55° C)	

### Technical Specifications - Hard Drives

<b>146 GB</b>	<b>Capacity</b>	146,815,737,856 bytes		
	<b>Height</b>	1.0 in (2.54 cm)		
	<b>Width</b>	3.5 in (8.9 cm)		
	<b>Interface</b>	68 pin LVD SCSI		
	<b>Synchronous Transfer Rate (Maximum)</b>	320 MB/s		
	<b>Buffer</b>	8 Mbytes		
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.3 msec	
		<b>Average</b>	<4.5 msec	
		<b>Full-Stroke</b>	<11.0 msec	
	<b>Rotational Speed</b>	10,000 rpm		
	<b>Logical Blocks</b>	286,749,488		
	<b>Operating Temperature</b>	40° to 130° F (5° to 55° C)		
	<b>300 GB</b>	<b>Capacity</b>	300,000,000,000 bytes	
<b>Height</b>		1.0 in (2.54 cm)		
<b>Width</b>		3.5 in (8.9 cm)		
<b>Interface</b>		68 pin LVD SCSI		
<b>Synchronous Transfer Rate (Maximum)</b>		320 MB/s		
<b>Buffer</b>		8 Mbytes		
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)		<b>Single Track</b>	0.3 msec	
		<b>Average</b>	<4.5 msec	
		<b>Full-Stroke</b>	<11.0 msec	
<b>Rotational Speed</b>		10,000 rpm		
<b>Logical Blocks</b>		585,937,500		
<b>Operating Temperature</b>		40° to 130° F (5° to 55° C)		



### Technical Specifications - Hard Drives

<b>Ultra320 SCSI Hard Drives (15,000 rpm)</b>	<b>36 GB</b>	<b>Capacity</b>	36,420,075,520 bytes		
		<b>Height</b>	1.0 in (2.54 cm)		
		<b>Width</b>	3.5 in (8.9 cm)		
		<b>Interface</b>	68 pin LVD SCSI		
		<b>Synchronous Transfer Rate (Maximum)</b>	320 MB/s		
		<b>Buffer</b>	8 Mbytes		
		<b>Seek Time (typical reads, includes controller overhead, including settling)</b>	<b>Single Track</b>	0.3 msec	
			<b>Average</b>	<4.5 msec	
			<b>Full-Stroke</b>	<11.0 msec	
		<b>Rotational Speed</b>	15,000 rpm		
		<b>Logical Blocks</b>	71,132,960		
		<b>Operating Temperature</b>	40° to 130°F (5° to 55°C)		
			<b>73 GB</b>	<b>Capacity</b>	73,407,865,856 bytes
<b>Height</b>	1.0 in (2.54 cm)				
<b>Width</b>	3.5 in (8.9 cm)				
<b>Interface</b>	68 pin LVD SCSI				
<b>Synchronous Transfer Rate (Maximum)</b>	320 MB/s				
<b>Buffer</b>	8 Mbytes				
<b>Seek Time (typical reads, includes controller overhead, including settling)</b>	<b>Single Track</b>			0.3 msec	
	<b>Average</b>			<4.5 msec	
	<b>Full-Stroke</b>			<11.0 msec	
<b>Rotational Speed</b>	15,000 rpm				
<b>Logical Blocks</b>	143,374,738				
<b>Operating Temperature</b>	40° to 130°F (5° to 55° C)				
	<b>146 GB</b>			<b>Capacity</b>	146,815,737,856 bytes
		<b>Height</b>	1.0 in (2.5 cm)		
		<b>Width</b>	3.5 in (8.9 cm)		
		<b>Interface</b>	68 pin LVD SCSI		
		<b>Synchronous Transfer Rate (Maximum)</b>	320 MB/s		
		<b>Buffer</b>	8 Mbytes		
		<b>Seek Time (typical reads, includes controller overhead, including settling)</b>	<b>Single Track</b>	0.3 msec	
			<b>Average</b>	<4.5 msec	
			<b>Full-Stroke</b>	<11.0 msec	
		<b>Rotational Speed</b>	15,000 rpm		
		<b>Logical Blocks</b>	143,374,738		
		<b>Operating Temperature</b>	40° to 130°F (5° to 55°C)		

## *Technical Specifications - Removable Storage*

<b>USB Disk on Key</b>	<b>Dimensions (HxWxD)</b>	0.9 x 0.7 x 3.9 in (2.3 x 1.8 x 9.8 cm)
	<b>Weight</b>	0.05 lb (0.02 kg)
	<b>USB Specification</b>	2.0
	<b>Transfer Rate</b>	Read-1023 KB/Sec; Write-850 KB/Sec
	<b>Storage Media</b>	Solid state flash memory, no moving parts
	<b>Power Supply</b>	USB Bus-powered, no external power required
	<b>Capacity</b>	256 MB

### Technical Specifications - Input/Output Devices

<b>PS/2 OR USB Standard Keyboard</b>	<b>Physical characteristics</b>	<b>Keys</b>	104, 105, 106, 107, 109 layout (depending upon country)
		<b>Dimensions (L x W x H)</b>	18.0 x 6.4 x 0.98 in (45.8 x 16.3 x 2.5 cm)
		<b>Weight</b>	2 lb (0.9 kg) minimum
	<b>Electrical</b>	<b>Operating voltage</b>	+ 5VDC ± 5%
		<b>Power consumption</b>	50-mA maximum (with three LEDs ON)
		<b>ESD</b>	CE level 4, 15-kV air discharge
		<b>EMI - RFI</b>	Conforms to FCC rules for a Class B computing device
	<b>Mechanical</b>	<b>MicrosoftPC 99 - 2001</b>	Functionally compliant
		<b>Languages</b>	38 available
		<b>Keycaps</b>	Low-profile design
		<b>Switch actuation</b>	55-g nominal peak force with tactile feedback
		<b>Switch life</b>	20 million keystrokes (using Hasco modified tester)
		<b>Switch type</b>	Contamination-resistant switch membrane
		<b>Key-leveling mechanisms</b>	For all double-wide and greater-length keys
		<b>Cable length</b>	6 ft (1.8 m)
		<b>Microsoft PC 99 - 2001</b>	Mechanically compliant
	<b>Environmental</b>	<b>Acoustics</b>	43-dBA maximum sound pressure level
		<b>Operating temperature</b>	50° to 122° F (10° to 50° C)
		<b>Non-operating temperature</b>	-22° to 140° F (-30° to 60° C)
		<b>Operating humidity</b>	10% to 90% (non-condensing at ambient)
		<b>Non-operating humidity</b>	20% to 80% (non-condensing at ambient)
		<b>Operating shock</b>	40 g, six surfaces
		<b>Non-operating shock</b>	80 g, six surfaces
		<b>Operating vibration</b>	2-g peak acceleration
		<b>Non-operating vibration</b>	4-g peak acceleration
		<b>Drop (out of box)</b>	26 in (66 cm) on carpet, six-drop sequence
		<b>Drop (in box)</b>	42 in (107 cm) on concrete, 16-drop sequence
	<b>Operating system support</b>		Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3 and 4
	<b>Approvals</b>		UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC
	<b>Ergonomic compliance</b>		ANSI HFS 100, ISO 9241-4, and TUVGS
	<b>Kit contents</b>		Keyboard, keyboard software media, installation guide, warranty card, safety and comfort

<b>HP USB Smart Card Keyboard (ED707AA)</b>	<b>Physical characteristics</b>	<b>Keys</b>	104, 105, 106, 107, 109 layout (depending upon country)
		<b>Form factor</b>	USB basic Smart Card keyboard

### Technical Specifications - Input/Output Devices

	<b>Colors</b>	Carbonite/Silver	
	<b>Dimensions (L x W x H)</b>	18.2 x 6.3 x 1.3 in (46.3 x 16.1 x 3.3 cm)	
	<b>Weight</b>	2 lb (0.9 kg) minimum	
<b>Electrical</b>	<b>Operating voltage</b>	+ 5VDC ± 5%	
	<b>Power consumption</b>	100-mA maximum (with four LEDs ON)	
	<b>System interface</b>	USB Type A plug connector	
	<b>ESD</b>	CE level 4, 15-kV air discharge	
	<b>EMI - RFI</b>	Conforms to FCC rules for a Class B computing device	
		<b>MicrosoftPC 99 - 2001</b>	Functionally compliant
	<b>Mechanical</b>	<b>Languages</b>	30+ available
<b>Keycaps</b>		Low-profile design	
<b>Switch actuation</b>		55-g nominal peak force with tactile feedback	
<b>Switch life</b>		20 million keystrokes (using Hasco modified tester)	
<b>Switch type</b>		Contamination-resistant switch membrane	
<b>Key-leveling mechanisms</b>		For all double-wide and greater-length keys	
<b>Cable length</b>		6 ft (1.8 m)	
		<b>Microsoft PC 99 - 2001</b>	Mechanically compliant
<b>Environmental</b>		<b>Acoustics</b>	43-dBA maximum sound pressure level
		<b>Operating temperature</b>	50° to 122° F (10° to 50° C)
	<b>Non-operating temperature</b>	-22° to 140° F (-30° to 60° C)	
	<b>Operating humidity</b>	10% to 90% (non-condensing at ambient)	
	<b>Non-operating humidity</b>	20% to 80% (non-condensing at ambient)	
	<b>Operating shock</b>	40 g, six surfaces	
	<b>Non-operating shock</b>	80 g, six surfaces	
	<b>Operating vibration</b>	2-g peak acceleration	
	<b>Non-operating vibration</b>	4-g peak acceleration	
		<b>Drop (out of box)</b>	26 in (66 cm) on carpet, six-drop sequence
	<b>Drop (in box)</b>	42 in (107 cm) on concrete, 16-drop sequence	

### Technical Specifications - Input/Output Devices

<b>SMARTCARD function</b>	<b>Support</b>	All ISO 7816 smart cards
	<b>Interface</b>	Reads from and writes to all ISO7816-1, 2, 3, 4 memory and microprocessor smart cards (T=0, T=1)
	<b>Chipset</b>	SCM STCII
	<b>Standard APIs supported</b>	PC/SC, EMV2000, SET
	<b>Power</b>	USB Port Short circuit detection (protects smart card and reader) Power supply compliant with ISO7816 and EMV (5V, 60 mA) Supports 3-V and 5-V cards
	<b>Power consumption</b>	250-mA maximum draw (50 mA for the keyboard with three LEDs ON and 200-mA maximum startup current using a high-current, 60-mA smart card)
	<b>Communication</b>	<b>From card</b> Programmable from 9,600 baud to 115,200 baud
		<b>From computer</b> Up to 38,400 baud
	<b>Landing mechanism</b>	<b>Contact device</b> Friction contact
		<b>Card insertions rating</b> Up to 100,000 insertion cycles
	<b>Interface modes</b>	USB communications through USB port SCM protocol Automatic card insertion/removal detection
	<b>Reader performance interface</b>	USB connection
	<b>Electro-magnetic standards</b>	<b>Europe</b> 89/336/CEE guideline
		<b>USA</b> USAFCC part 15
<b>Operating system support</b>	Microsoft® Windows® 2000, Windows XP Home, Windows XP Professional, xpe, ce.net, Linux, XP-64	
<b>Approvals</b>	CE-Mark, UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC, JITC, EMV2000, USB-IF	
<b>Ergonomic compliance</b>	ANSI HFS 100, ISO 9241-4, TUVGS	
<b>Kit contents</b>	Keyboard, I/O Security and Documentation CD, , warranty card	
<b>Smart card compatibility</b>	<b>HP</b>	HP ProtectTools Smart Card
	<b>American Express</b>	Amex Blue

### Technical Specifications - Input/Output Devices

<b>Axalto (Schlumberger)</b>	Cryptoflex 8K Cryptoflex 16K Cryptoflex 32K Cryptoflex 32K e-gate Cyberflex Access 64K Cyberflex Access 32K Cyberflex 32K e-gate Cyberflex 64K Cyberflex Palmera Payflex-S Payflex 1K Payflex 2K Payflex 4K Payflex 8K Prismera US DoD CAC
<b>Cardlogix</b>	CLXSU004KK4 CLXSU008KK5
<b>Datakey</b>	Model 300 Model 330
<b>De La Rue</b>	VisaCash
<b>Gemplus</b>	Gem Espresso GKK32K Gemclub Memo GemClub Micro GemXplore GemSafe
<b>Infineon</b>	SLE66C322P
<b>SafLink (Litronic)</b>	Forte
<b>Sharp</b>	Java Card
<b>Oberthur</b>	CosmopolIIC v4 CosmopolIIC v4.1 Cosmo ID-One GalatIIC v2.1 US DoD CAC
<b>Memory Cards</b>	
<b>Atmel</b>	AT24C01ASC AT24C02SC AT24C04SC AT24C08SC AT24C16SC AT24C32SC AT24C64SC AT24C128SC AT24C256SC AT24C512SC AT88SC153 AT88SC1608
<b>Axalto (Schlumberger)</b>	PrimeFlex Store 8K PrimeFlex Store 2K

### Technical Specifications - Input/Output Devices

<b>nfineon</b>	SLE4406
	SLE4406E
	SLE4406E SE
	SLE4418
	SLE4428
	SLE4432
	SLE4436E
	SLE4442
	SLE5536
	<b>ISSI</b>
<b>ST</b>	14C02
<b>Telefonkarte</b>	SLE4406 SLE4436 SLE5536
<b>XICOR</b>	X24026

<b>HP PS/2 Scroll Mouse</b>	<b>Dimensions</b>	3.8 x 6.3 x 11.6 cm (1.5 x 2.5 x 4.6 in)	
	<b>Weight</b>	4.44 oz (126 g)	
	<b>Environmental</b>	<b>Operating temperature</b>	50° to 122° F (10° to 50° C)
		<b>Non-operating temperature</b>	-22° to 140° F (-30° to 60° C)
		<b>Operating humidity</b>	10% to 90% (non-condensing at ambient)
		<b>Non-operating humidity</b>	20% to 80% (non-condensing at ambient)
		<b>Operating shock</b>	40 g, 6 surfaces
		<b>Non-operating shock</b>	80 g, 6 surfaces
		<b>Operating vibration</b>	2 g peak acceleration
		<b>Non-operating vibration</b>	4 g peak acceleration
		<b>Drop (out-of-box)</b>	26 in (66 cm) on carpet, 6-drop sequence
		<b>Drop (out-of-box)</b>	1 m on asphalt tile over concrete, 6-drop sequence
	<b>Electrical</b>	<b>Operating voltage</b>	5 VDC ± 10%
		<b>Power consumption</b>	15 mA
		<b>System consumption</b>	PS/2 mini-din connector
<b>ESD</b>		CE level 4, 15 kV air discharge	
<b>EMI-RFI</b>		Conforms to FCC rules for a Class B computing device	
<b>Microsoft PC99 - 2001</b>	Functionally compliant		

### Technical Specifications - Input/Output Devices

<b>Mechanical</b>	<b>Resolution</b>	400 ± 20% DPI
	<b>Tracking speed</b>	10 in/s maximum
	<b>Acceleration</b>	100 in/s
	<b>Switch actuation</b>	65 g nominal peak force
	<b>Switch life</b>	1,000,000 operations (using Hasco modified tester)
	<b>Switch type</b>	Low force micro-switches
	<b>Tracking mechanism life</b>	155 mi (250 km) at average speed of 10 in/s
	<b>Cable length</b>	6 ft (1.8 m)
	<b>Microsoft PC99 - 2001</b>	Mechanically compliant
	<b>Scroll wheel</b>	<b>Width</b>
<b>Diameter</b>		0.99 in (25.2 mm)
<b>Maximum rotation speed</b>		30 mm/s
<b>Switch type</b>		Light force micro-switch
<b>Switch life</b>		1 million operations
<b>Regulatory approvals</b>	<b>Mechanical life</b>	Minimum 200,000 revolutions
	<b>Compliant</b>	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC
<b>Compatibility</b>	<b>Operating system support</b>	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3 and 4

---

<b>HP 2-button Optical Scroll Mouse (USB)</b>	<b>Dimensions (H x L x W)</b>	1.5 x 4.5 x 2.5 in (3.8 x 11.6 x 6.3 cm)
	<b>Weight</b>	0.27 lb (0.12 kg)
	<b>Cable length</b>	72.8 in (185 cm)
	<b>System requirements</b>	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3 and 4

---



### Technical Specifications - Input/Output Devices

<b>Spaceball 5000 USB</b> (Windows XP only)	<b>Physical characteristics</b>	<b>Dimensions (H x W x D)</b>	3.0 x 6.0 x 8.4 in (7.6 x 15.2 x 21.3 cm)
		<b>Ball Diameter</b>	2.2 in (5.6 cm)
		<b>Weight</b>	2.1 lb (9.94 kg)
		<b>Features</b>	Six degrees of freedom motion control through the X, Y, Z axis (pitch, roll, yaw) Certified for leading CAD and DCC applications
	<b>Environmental</b>	<b>Operating temperature</b>	50° to 104° F (10° to 40° C)
		<b>Non-operating temperature</b>	43° to 140° F (6° to 60° C)
		<b>Operating humidity</b>	8% to 80% (non-condensing at ambient)
		<b>Non-operating humidity</b>	5% to 80% (non-condensing at ambient)
	<b>Mechanical</b>	<b>Buttons</b>	12 programmable (unshifted)
		<b>Ball Force Range</b>	0.5 - 8.2N/1.8 - 29.5 oz
		<b>Ball Torque Range</b>	0.085 – 0.33 oz-in. (6.91 Nmm)
		<b>Resolution</b>	10 bits
	<b>Serial Specifications</b>	<b>Connector</b>	USB 1.1 or greater
		<b>Cable Length</b>	12.8 ft. (3.9 m)
		<b>Data Rate</b>	USB model – 16 msec
		<b>Flow Control</b>	Xon/Xoff (on PS/2 model only)
	<b>Software Drivers Available</b>	<b>USB model</b>	Microsoft Windows XP Professional
	<b>System Requirements</b>	<b>Disk Space</b>	10 MB free disk space
	<b>Regulatory Approvals</b>	UL, cUL, EN 950, EN 60950, CSA, FCC, CE Mark, TUV, CISPR 22, EN 50082, IEC 1000 4-2, IEC 1000-4-3, AS/NZS, VCCI, BSMI, C-Tick	

<b>HP SpaceMouse Plus USB</b> (Windows XP only)	<b>Physical characteristics</b>	<b>Dimensions (H x W x D)</b>	7.4 x 4.72 x 1.73 in (18.8 x 12.0 x 4.4 cm)
		<b>Cap Diameter</b>	2 x 6.5 x 6.6 mm
		<b>Weight</b>	1.5 lb (0.68 kg)
		<b>Features</b>	Six degrees of freedom motion control through the X, Y, Z axis (pitch, roll, yaw) Certified for leading CAD and DCC applications
	<b>Environmental</b>	<b>Operating temperature</b>	41° to 140° F (5° to 60° C)
		<b>Non-operating temperature</b>	-13° to 158° F (-25° to 70° C)
		<b>Operating humidity</b>	10 to 98 % RH (non-condensing)
		<b>Non-operating humidity</b>	10 to 98 % RH (non-condensing)
	<b>Mechanical</b>	<b>Buttons</b>	11 programmable (unshifted)
		<b>Cap Force Range</b>	0.2 N – 4.5 N
		<b>Cap Torque Range</b>	4 Nmm to 100 Nmm
		<b>Resolution</b>	8 bit
	<b>USB Specifications</b>	<b>Connector</b>	USB 1.1 or greater
		<b>Cable Length</b>	6.56 ft (2 m)
		<b>Data Rate</b>	16 msec

### Technical Specifications - Input/Output Devices

<b>Software Drivers Available</b>	Microsoft Windows XP Professional
<b>System Requirements</b>	<b>Disk Space</b> 10 MB free disk space
<b>Regulatory Approvals</b>	UL, cUL, EN 950, EN 60950, CSA, FCC, CE Mark, TUV, CISPR 22, EN 50082, IEC 1000 4-2, IEC 1000-4-3, AS/NZS, VCCI, BSMI, C-Tick

<b>HP SpacePilot 3D USB Intelligent Controller</b> (model EF390AA)	<b>Physical Characteristics</b>	<b>Dimensions (L x W x H)</b>	9.3 x 5.6 x 2.0 in (236 x 143 x 53 mm)
		<b>Weight</b>	1.875 lb (0.85 kg)
		<b>Palmrest</b>	Sculpted
	<b>Mechanical</b>	<b>Buttons</b>	21+ programmable speed keys 15 reprogrammable
		<b>LCD Viewing Area</b>	(W x H) 4.1 x 1.2 in (102 x 30 mm)
		<b>Active Area</b>	(W x H) 3.9 x 1.0 in (98 x 26 mm)
		<b>Display Format</b>	240 x 64
	<b>System Requirements</b>	<b>Motion Controller</b>	Six degrees of freedom motion control through the X, Y, Z axis (pitch, roll, yaw)
		<b>Device Sensitivity</b>	Adjustable to preference
		<b>System Requirements</b>	Intel Pentium 4 or AMD Athlon processor based system 20 megabytes free disk space for driver and plug-in installation (CD-ROM device required) USB 1.1 or 2.0
	<b>Operating System Supported</b>	Microsoft Windows 2000 and XP	
	<b>Regulatory Approvals</b>	FCC, CE	

<b>1394a FireWire 400 PCI card</b>	<b>Device Interface Protocol</b>	IEEE-1394a	
	<b>Data Rate</b>	400 Mbps	
	<b>Devices Supported</b>	IEEE-1394 compliant devices	
	<b>Bus Interface</b>	PCI	
	<b>Physical</b>	<b>Physical</b>	Low profile PCI card with a full height bracket
		<b>Environmental</b>	<b>Operating temperature</b> 41° to 95° F (5° to 35° C) <b>Non-operating temperature</b> 158° F (70° C) and above <b>Relative humidity</b> 10% to 90%
	<b>Minimum System Requirements</b>	<b>Ports</b>	2 rear and 2 front (depends on model of PC)
		<b>Minimum System Requirements</b>	Windows XP Professional, Windows XP Professional x64 Edition, Linux support with the HP Installer Kit for Linux Pentium II 266 or faster 32-MB RAM 1-GB Hard Drive CD-ROM drive Built in sound system

### Technical Specifications - Optical Devices

<b>48X CD-ROM Drive</b>	<b>Form Factor</b>	5.25-in, half-height, tray load	
	<b>Mounting Orientation</b>	Horizontal or vertical	
	<b>Interface</b>	ATAPI/EIDE	
	<b>Dimensions (HxWxD)</b>	1.63 x 5.83 x 7.27 in (4.13 x 14.6 x 18.5 cm)	
	<b>Weight</b>	1.76 lb (0.8 kg)	
	<b>Data Transfer Rates - Read</b>	Digital audio extraction (minimum) – 1,200 KB/s (8X) CD read – up to 7,200 KB/s (48X)	
	<b>Media and Formats - Read</b>	<b>CD Media</b>	stamped, CD-R, CD-RW (LS, HS, US)
		<b>CD Capacities</b>	180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute)
		<b>CD Formats</b>	CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD
		<b>Access Times</b> (typical reads, including settling)	<b>CD-ROM Mode 1</b> < 125 ms <b>Full Stroke CD</b> < 210 ms <b>Start-up Time</b> (typical) < 7 s (single session), < 30 s (multi-session) <b>Stop Time</b> (typical) < 4 s <b>Write Buffer Size</b> 128 KB (minimum) <b>Data Transfer Modes</b> PIO Mode 4 (16.6 MB/s); Multi-word DMA mode 2 (16.6 MB/s); UltraDMA Mode 0 (16.7 MB/s); UltraDMA Mode 2 (33.3 MB/s)
	<b>Power</b>	<b>Source</b>	Four-pin, DC power receptacle
		<b>DC Power Requirement</b>	5 VDC ± 5% - 100 mV ripple p-p 12 VDC ± 5% - 200 mV ripple p-p
		<b>DC Current</b>	5 VDC - <1000 mA typical, < 1600 mA maximum 12 VDC - < 600 mA typical, <1400 mA maximum
		<b>Total Drive Power</b> (standby mode)	< 2.5 Watt
<b>Audio Output</b>		<b>Line-Out</b>	0.7 VRMS
	<b>Signal-to-Noise Ratio</b>	74 dB	
	<b>Channel Separation</b>	65 dB	
<b>Configuration Jumper Block</b>	Master, slave, and cable select modes		
<b>Operating Conditions</b> (all conditions non-condensing)	<b>Temperature</b>	41° to 122° F (5° to 50° C)	
	<b>Humidity</b>	10% to 80%	

### Technical Specifications - Optical Devices

<b>Certifications, Approvals</b>	MMC-3 support, multi-read compliant, Microsoft WHQL certification, ACA AS/NZS 3548 class B, BSMI CNS 13438, CE Mark, C.I.S.P.R. Pub 22, TUV or VDE EN60950, EN 55022, EN55024, EMKO EN60950, EN 60825-1, UL 60950, CSA C22.2 60950-2000, CFR 21 part 1040 class 1, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, ANSI C63.4-1992 (FCC Class B)
<b>Operating Systems Supported</b>	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3
<b>Supplied Software</b>	None

#### 16X/48X DVD-ROM Drive with +R Read Support

<b>Height</b>	5.25-in, half-height, tray load	
<b>Interface Type</b>	ATAPI/EIDE	
<b>Dimensions (W x H x D)</b>	5.88 x 1.71 x 7.87 [max] in (149.5 x 43.25 x 200.0 [max] mm) (external, excluding bezel)	
<b>Disc Formats</b>	DVD-ROM (single and dual layer); DVD-video; DVD-R version 1.0 and 2.0; DVD-RW version 1.0 and 1.1; DVD-R multi-border; DVD+RW; DVD+R ; CD-ROM Mode 1 and 2; CD-DA; CD-ROM XA Mode 2, Form 1 and 2; CD-extra; CD-text; CD-I Mode 2, Form 1 and 2; CD-I ready; video CD, CD-bridge; PhotoCD (single and multi-session); CD-R; CD-RW	
<b>Disc Capacity</b>	<b>DVD-ROM</b>	4.7 GB (DVD-5), 8.54 GB (DVD-9), 9.4 GB (DVD-10), 3.95 GB (DVD-R version 1.0), 4.7 GB (DVD-R version 2.0), 4.7 GB (DVD-RW version 1.0 and 1.1), 4.7 GB (DVD+RW), 4.7G (DVD+R)
	<b>CD-ROM</b>	540 MB (Mode 1, 12 cm), 640 MB (Mode 2, 12 cm), 700 MB (80 minimum CD-R and CD-RW), 180 MB (8 cm)
<b>Access Times</b> (typical reads, including settling)	<b>DVD-ROM Single Layer</b>	120 ms
	<b>CD-ROM Mode 1</b>	90 ms
	<b>Full Stroke DVD</b>	240 ms (seek)
	<b>Full Stroke CD</b>	160 ms (seek)
	<b>Startup Time</b>	< 10 seconds (typical)
	<b>Stop Time</b>	< 4 seconds
	<b>Data Transfer Modes</b>	PIO Mode 4 (16.6 MB/s); Multi-word DMA mode 2 (16.6 MB/s); UltraDMA Mode 3 (44.4 MB/s)
<b>Maximum Data Transfer Rates</b>	<b>CD-ROM Read</b>	6000 KB/s (40X) Max
	<b>DVD-ROM Read</b>	21,600 KB/s (16X) Max
	<b>Digital Audio Extraction</b>	6000 KB/s (40X) Max

### Technical Specifications - Optical Devices

<b>Power</b>	<b>Source</b>	Four-pin, DC power receptacle
	<b>DC Power Requirement</b>	5 VDC $\pm$ 5% – 100 mV ripple p-p 12 VDC $\pm$ 5% – 200 mV ripple p-p
	<b>DC Current</b>	5 VDC – <800 mA typical, < 1000 mA maximum 12 VDC – < 870 mA typical, <1800 mA maximum
<b>Audio Output</b>	<b>Line-Out</b>	0.7 VRMS
	<b>Signal-to-Noise Ratio</b>	85 dB
	<b>Channel Separation</b>	65 dB
<b>Configuration Jumper Block</b>	Master, slave, and cable select modes	
<b>Data Interface Connector</b>	40-pin, shrouded and keyed, flat ribbon	
<b>Operating Environmental</b> (all conditions non-condensing)	<b>Temperature (operating)</b>	41° to 122° F (5° to 50° C)
	<b>Relative Humidity (operating)</b>	10% to 85%
	<b>Maximum Wet Bulb Temperature (operating)</b>	86° F (30° C)
<b>Certifications, Approvals</b>	MMC II support, multi-read certification, Microsoft WHQL certification, ACA AS/NZS 3548 class B, CNS 13438, C.I.S.P.R. Pub 22, TUV or VDE EN60950, EN 55022, EN55024, EMKO EN60950, EN 60825-1, UL 60950, CSA C22.2 60950-2000, CFR 21 part 1040 class 1, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, ANSI C63.4-1992	
<b>Operating Systems Supported</b>	Windows 2000, XP Professional, and XP Professional x64 Edition Red Hat Linux 7.2, 7.3 WS3 and WS4 Versions	
<b>Kit Contents</b>	16X/40X DVD-ROM Drive, InterVideo WinDVD MPEG Movie Playback software, audio cable, and installation guide.	

---

<b>HP 48X CD-RW</b>	<b>Form Factor</b>	5.25-inch, half-height, tray-load
	<b>Mounting Orientation</b>	Horizontal or vertical
	<b>Interface</b>	ATAPI/EIDE
	<b>Dimensions (HxWxD)</b>	1.63 x 5.75 x 7.27 [max] in (4.13 x 14.6 x 18.5 [max] cm) (external, excluding bezel)
	<b>Weight (max)</b>	2.0 lb (0.9 kg)

### Technical Specifications - Optical Devices

<b>Read Only Disc Parameters</b>	<b>Data Transfer Rates - Read</b>	<b>Digital audio extraction</b> (minimum) - 1,800 KB/s (12X) <b>CD read</b> - up to 7,200 KB/s (48X)
	<b>Media and Formats - Read</b>	<b>CD Media:</b> stamped; CD-R; CD-RW (LS, HS, US) <b>CD Capacities:</b> 180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute) <b>CD Formats:</b> CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD
<b>Writeable Disc Parameters</b>	<b>Data Transfer Rates - Write</b>	<b>CD-R write</b> - 2100 KB/s (14X) to 7200 KB/s (48X) <b>CD-RW write</b> - 600 KB/s (4X) <b>CD-RW write (high speed)</b> - 1500 KB/s (10X) to 1800 KB/s (12X) <b>CD-RW write (ultra high speed)</b> - 2400 KB/s (16X) to 4800 KB/s (32X)
	<b>Media and Formats - Write</b>	<b>CD Media:</b> CD-R; CD-RW (LS, HS, US) <b>CD Capacities:</b> 180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute) <b>CD Formats:</b> CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD
	<b>Write Methods</b>	Disc-at-once, session-at-once, track-at-once, incremental fixed and variable packet, multi-session
	<b>Access Times</b> (typical reads, including settling)	<b>CD-ROM Mode 1</b> < 125 ms <b>Full Stroke CD</b> < 210 ms <b>Start-up Time</b> (typical) < 7 s (single session), < 30 s (multi-session) <b>Stop Time</b> (typical) < 4 s <b>Write Buffer Size</b> 2 MB <b>Data Transfer Modes</b> PIO Mode 4 (16.6 MB/s); Multi-word DMA mode 2 (16.6 MB/s); UltraDMA Mode 2 (33.3 MB/s)

### Technical Specifications - Optical Devices

<b>Power</b>	<b>Source</b>	Four-pin, DC power receptacle
	<b>DC Power Requirement</b>	5 VDC $\pm$ 5%-100 mV ripple p-p 12 VDC $\pm$ 5%-200 mV ripple p-p
	<b>DC Current</b>	5 VDC (< 1000 mA typical, < 1600 mA maximum) 12 VDC (< 600 mA typical, < 1400 mA maximum)
	<b>Total Drive Power (standby mode)</b>	< 2.5 Watt
	<b>Audio Output</b>	<b>Line-Out</b> 0.7 VRMS <b>Signal-to-Noise Ratio</b> 74 dB <b>Channel Separation</b> 65 dB
<b>Configuration Jumper Block</b>	Master, slave, and cable select modes	
<b>Operating Conditions</b>	<b>Temperature</b>	41° to 122° F (5° to 50° C)
	<b>Humidity</b>	10% to 90% 10% to 90%
<b>Certifications, Approvals</b>	MMC-3 support, multi-read compliant, Microsoft WHQL certification, ACA AS/NZS 3548 class B, BSMI CNS 13438, CE Mark, C.I.S.P.R. Pub 22, TUV or VDE EN60950, EN 55022, EN55024, EMKO EN60950, EN 60825-1, UL 60950, CSA C22.2 60950-2000, CFR 21 part 1040 class 1, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, ANSI C63.4-1992 (FCC Class B)	
<b>Operating Systems Supported</b>	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3	
<b>Supplied Software (for Windows XP)</b>	Roxio Digital Media Plus: Create or copy CDs and DVDs, including music and data CDs, and data DVDs Dantz Retrospect Express: Back up systems to CD, DVD, or tape media.	

---

<b>HP 48X CD-RW/DVD-ROM Combo Drive</b>	<b>Form Factor</b>	5.25-inch, half-height, tray-load
	<b>Mounting Orientation</b>	Horizontal or vertical
	<b>Interface</b>	ATAPI/EIDE
	<b>Dimensions (HxWxD)</b>	5.77 x 1.71 x 7.87 [max] in (14.66 x 4.34 x 20.0 [max] cm) (external, excluding bezel)
	<b>Weight (max)</b>	2.6 lb (1.2 kg)

### Technical Specifications - Optical Devices

#### Read Only Disc Parameters

#### Data Transfer Rates - Read

**CD read** - 7200 KB/s (48X) Max

Digital audio extraction (minimum) - 1,800 KB/s (12X)

**DVD ROM read** - 21,632 KB/s (16X ) Max

#### Media and Formats - Read

**CD Media:** stamped; CD-R; CD-RW (LS, HS, US)

**CD Capacities:** 180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute)

**CD Formats:** CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD

**DVD Media:** stamped (single and double layer); DVD+R; DVD+RW; DVD+R DL; DVD-R; DVD-RW

**DVD Capacities:** 4.7 GB (DVD-5), 8.54 GB (DVD-9), 9.4 GB (DVD-10), 3.95 GB (DVD-R version 1.0), 4.7 GB (DVD-R version 2.0), 4.7 GB (DVD-RW version 1.0 and 1.1), 4.7 GB (DVD+RW), 4.7G (DVD+R)

**DVD Formats:** DVD-ROM (single and dual layer); DVD-video; DVD-R version 1.0 and 2.0; DVD-RW version 1.0 and 1.1; DVD-R multi-border ; DVD+R version 1.2 (including multi-session); DVD+R DL version 1.0; DVD+RW version 1.2

#### Writeable Disc Parameters

#### Data Transfer Rates - Write

**CD-R write** - 2100 KB/s (14X) to 7200 KB/s (48X)

**CD-RW write** - 600 KB/s (4X)

**CD-RW write** (high speed) - 1500 KB/s (10X) to 1800 KB/s (12X)

**CD-RW write** (ultra high speed) - 2400 KB/s (16X) to 4800 KB/s (32X)

#### Media and Formats - Write

**CD Media:** CD-R; CD-RW (LS, HS, US)

**CD Capacities:** 180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute)

**CD Formats:** CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD

#### Write Methods

Disc-at-once, session-at-once, track-at-once, incremental fixed and variable packet, multi-session



### Technical Specifications - Optical Devices

<b>Access Times</b> (typical reads, including settling)	<b>Random DVD</b>	< 140 ms
	<b>Random CD</b>	< 125 ms, (typical)
	<b>Full Stroke DVD</b>	< 250 ms
	<b>Full Stroke CD</b>	< 210 ms
	<b>Startup Time (single)</b>	< 7 seconds (typical)
	<b>Startup Time (multi-session)</b>	< 30 seconds (typical)
	<b>Stop Time (typical)</b>	< 4 s
	<b>Cache Buffer</b>	2 MB (minimum)
	<b>Data Transfer Modes</b>	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s); ATA UltraDMA Mode 3 (44 Mbytes/s)
	<b>Power</b>	<b>Source</b>
<b>DC Power Requirement</b>		5 VDC $\pm$ 5%-100 mV ripple p-p 12 VDC $\pm$ 5%-200 mV ripple p-p
<b>DC Current</b>		5 VDC (< 1000 mA typical, < 1600 mA maximum) 12 VDC (< 600 mA typical, < 1400 mA maximum)
<b>Total Drive Power (standby mode)</b>		< 2.5 Watt
<b>Audio Output</b>		<b>Line-Out</b> 0.7 VRMS <b>Signal-to-Noise Ratio</b> 74 dB <b>Channel Separation</b> 65 dB
<b>Configuration Jumper Block</b>	Master, slave, and cable select modes	
<b>Data Interface Connector</b>	40-pin, shrouded and keyed, flat ribbon	
<b>Operating Conditions</b> (all conditions non-condensing)	<b>Temperature</b>	41° to 122° F (5° to 50° C)
	<b>Relative humidity</b>	10% to 90%
	<b>Maximum wet bulb temperature</b>	86° F (30° C)
<b>Certifications, Approvals</b>	MMC-3 support, multi-read compliant, Microsoft WHQL certification, ACA AS/NZS 3548 class B, BSMI CNS 13438, CE Mark, C.I.S.P.R. Pub 22, TUV or VDE EN60950, EN 55022, EN55024, EMKO EN60950, EN 60825-1, UL 60950, CSA C22.2 60950-2000, CFR 21 part 1040 class 1, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, ANSI C63.4-1992 (FCC Class B)	
<b>Operating Systems Supported</b>	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat WS3 and WS4 Versions	
<b>Supplied Software (for Windows XP)</b>	Roxio Cineplayer Movie Playback Roxio Digital Media Plus: Create or copy CDs and DVDs, including music and data CDs, and data DVDs	

### Technical Specifications - Optical Devices

<b>16X DVD+/-RW, Dual-Layer (Win and RHWS3)</b>	<b>Height</b>	5.25-inch, half-height, tray-load	
	<b>Orientation</b>	Either horizontal or vertical	
	<b>Interface Type</b>	ATAPI/EIDE	
	<b>Disc Recording Capacity</b>	4.7 GB (single-layer), 8.5 GB (double-layer)	
	<b>Dimensions (W x H x D)</b>	5.9 x 1.7 x 7.9 in (15.0 x 4.4 x 20.0 cm)	
	<b>Weight (maximum)</b>	2.6 lb (1.2 kg)	
	<b>Recording Method</b>	Disc-at-once, Track-at-once, and Session-at-once; Variable Packet and Fixed Packet	
	<b>Write Support</b>	DVD+R (1.3), DVD+R DL (1.0), DVD+RW (1.2), DVD-R (2.0), DVD-RW (1.1), CD-R (OBII Vol2.0 Rev 1.2), CD-RW (LS, HS, US)	
	<b>Read Support</b>	DVD-ROM (single- and dual-layer), DVD-Video, DVD+R (include multisession), DVD+RW, DVD-R (incl. multiborder), DVD-RW, DVD-MRW; CD-ROM Mode 1, CD-ROM XA (Mode 2, forms 1 and 2), CD-TEXT, Photo CD single- and multi-session, CD-DA (Audio CD), CD-Extra, CD-R, CD-RW (supports AM2), VCD, CD-I, UDF (1.02 and 1.50), CD-MRW	
	<b>Write Speed (maximum)</b>	<b>DVD+R</b>	16X CAV (21,600 KB/s), 8x ZCLV (10,800 KB/s), 2.4-8x CLV (3250-10,800 KB/s)
<b>DVD+RW</b>		2.4-4X CLV (3250-5400 KB/s)	
<b>DVD-R</b>		2-4X CLV (2700-5400 KB/s), 8X ZCLV (10,800 KB/s)	
<b>DVD-RW</b>		2-4X CLV (2700-5400 KB/s)	
<b>CD-R</b>		16-40X CAV (2400-6000 KB/s)	
<b>CD-RW (US)</b>		4-24X CLV (600-3600 KB/s)	
<b>Read Speed (maximum)</b>		<b>DVD-ROM</b>	5-16X CAV (6750 - 21,600 KB/s)
		<b>DVD+R, DVD+RW, DVD-R, DVD-RW</b>	4-8X CAV (5400 - 10,800 KB/s)
		<b>CD-ROM, CD-R, CD-RW, CD-Audio</b>	16-40X CAV (2400 to 6000 KB/s)
		<b>Access Time (typical reads, including settling)</b>	
	<b>Random DVD</b>	< 130 ms (typical)	
	<b>Random CD</b>	< 120 ms, (typical)	
	<b>Full Stroke DVD</b>	< 240 ms (seek)	
	<b>Full Stroke CD</b>	< 200 ms (seek)	
	<b>Startup Time (single)</b>	< 7 seconds (typical)	
	<b>Startup Time (multi-session)</b>	< 30 seconds (typical)	
	<b>Stop Timex</b>	< 4 seconds	
	<b>Cache Buffer</b>	2 MB (minimum)	
	<b>Data Transfer Modes</b>	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s); ATA UltraDMA Mode 3 (44.4 MB/s) (default on most HP xw workstations)	

### Technical Specifications - Optical Devices

<b>Power</b>	<b>Source</b>	Four-pin, DC power receptacle
	<b>DC Power Requirement</b>	5 VDC $\pm$ 5%-100 mV ripple p-p 12 VDC $\pm$ 10%-200 mV ripple p-p
	<b>DC Current</b>	5 VDC (< 2000 mA typical, < 2500 mA maximum) 12 VDC (< 700 mA typical, < 2000 mA maximum)
	<b>Total Drive Power (standby mode)</b>	< 2.5 Watt
<b>Audio Output</b>	<b>Line-Out</b>	0.7 VRMS
	<b>Signal-to-Noise Ratio</b>	74 dB
	<b>Channel Separation</b>	65 dB
<b>Operating Environmental</b> (all conditions non-condensing)	<b>Temperature</b>	41° to 122° F (5° to 50° C)
	<b>Relative humidity</b>	10% to 90%
	<b>Maximum wet bulb temperature</b>	86° F (30° C)
<b>System Configuration</b>	Intel Pentium IV Processor or later with 128 MB of memory (required); 256 MB recommended 2-D or 3-D graphics cards on primary disk drive for operating system and application software; second disk drive for audio and video data	
<b>Operating Systems Support</b>	Windows 2000, XP Professional, and XP Professional x64 Edition Red Hat Linux 7.2, 7.3 WS3 and WS4 Versions (Red Hat Linux 7.2, 7.3, 8, 9.0 may require additional third party software to make full use of this device)	
<b>Regulatory Approvals</b>	MPC-3 and MMC-4 compliant, multi-read certified, ATA Spec X3T9.2, ATAPI Spec T13.1153D, ANSI C63.4-1992, UL 60950, ACA AS/NZS 3548, CB Bulletin No. 96A, CSA C22.2 No. 60950, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, EMKO-TSE 07/94, TUV EN60950, EN60825-1, MIC Class B, BSMI-CNS 13438, CE EN60950, EN55022:1998 and EN55024, Microsoft Logo for Windows XP, relevant parts of IEC 61000-4.	
<b>Option Kit contents</b>	16X DVD $\pm$ R/ $\pm$ RW Drive, InterVideo WinDVD, InterVideo WinDVD Creator, Roxio Easy Media Creator. <b>NOTE:</b> This DVD writer kit does not include any software for burning DVDs on Linux. DVD burning is supported with the 'growisofs' command. CD burning is supported with the 'cdrecord' command. Red Hat Enterprise Linux WS 3 distribution includes both 'cdrecord' and 'growisofs'. Red Hat Linux 7.2, 7.3, 8, 9.0 distributions only include 'cdrecord'. Therefore DVD burning is only supported on WS 3.	

<b>16X DVD<math>\pm</math>-RW, Dual-Layer, with LightScribe Direct Disc Labeling</b>	<b>Form Factor</b>	5.25-inch, half-height, tray-load
	<b>Orientation</b>	Horizontal or vertical
	<b>Interface</b>	ATAPI/EIDE
	<b>Dimensions (HxWxD)</b>	5.9 x 1.7 x 7.9 in (15.0 x 4.4 x 20.0 cm)
	<b>Weight (maximum)</b>	2.6 lb (1.2 kg)

### Technical Specifications - Optical Devices

#### Read Only Disc Parameters

#### Data Transfer Rates - Read

**DVD-ROM, DVD-video read** - 5-16X (6750 - 21,600 KB/s CAV)

**DVD-video playback, DVD+R, DVD+RW, DVD-R, DVD-RW** - 4-8X (5400 - 10,800 KB/s CAV)

**CD-audio playback** - 8x (1200 KB/s CLV)

**Digital audio extraction** (minimum) - 12X (1,800 KB/s CAV)

**CD-ROM, CD-R, CD-RW, CD-Audio read** - 16-40X (2400 to 6000 KB/s CAV)

#### Media and Formats - Read

**CD Media:** stamped; CD-R; CD-RW (supports AM2) (LS, HS, US)

**CD Capacities:** 180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute)

**CD Formats:** CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD, UDF (1.02 and 1.50)

**DVD Media:** stamped (single and double layer); DVD+R; DVD+RW; DVD+R DL; DVD-R; DVD-RW

**DVD Capacities:** 4.7 GB (DVD-5), 8.54 GB (DVD-9), 9.4 GB (DVD-10), 14.1 GB (DVD-14), 17.0 GB (DVD-18), 3.95 GB (DVD-R version 1.0), 4.7 GB (DVD-R version 2.0), 4.7 GB (DVD-RW version 1.0 and 1.1), 4.7 GB (DVD+RW), 4.7G (DVD+R), 1.46 GB (DVD+R, 8cm), 1.46 GB (DVD+RW, 8cm)

**DVD Formats:** DVD-ROM (single and dual layer); DVD-video; DVD-R version 1.0 and 2.0 (including multi-border); DVD-RW version 1.0 and 1.1; DVD+R version 1.3 (including multi-session); DVD+R DL version 1.0; DVD+RW version 1.2

### Technical Specifications - Optical Devices

#### Writeable Disc Parameters

#### Data Transfer Rates - Write

**CD-R write** - 16-40X (2400-6000 KB/s CAV)  
**CD-RW write** - 4X (600 KB/s CLV)  
**CD-RW write** (high speed) - 10X (1500 KB/s CLV)  
**CD-RW write** (ultra high speed) - 16-24X (2400-3600 KB/s ZCLV)  
**DVD+R** - 6-16X (8100-21,600 KB/s CAV), 8x (10,800 KB/s ZCLV), 2.4-4x (3250-5400 KB/s CLV)  
**DVD+R DL** - 2.4 (3250 KB/s CLV)  
**DVD+RW** - 2.4-4X (3250-5400 KB/s CLV)  
**DVD-R** - 2-4X (2700-5400 KB/s CLV), 8X (10,800 KB/s ZCLV)  
**DVD-RW** - 2-4X (2700-5400 KB/s CLV)

#### Media and Formats - Write

**CD Media:** CD-R (OBII Vol2.0 Rev 1.2), CD-RW (LS, HS, US)  
**CD Capacities:** 180 MB (mode 1, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute)  
**CD Formats:** CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD, UDF (1.02 and 1.50)  
**DVD Media:** DVD+R, DVD+R DL, DVD+RW, DVD-R, DVD-RW  
**DVD Capacities:** 4.7 GB (DVD-5), 8.54 GB (DVD-9), 4.7 GB (DVD-R version 2.0), 4.7 GB (DVD-RW version 1.1), 4.7 GB (DVD+RW version 1.3), 4.7G (DVD+R version 1.2) , 1.46 GB (DVD+R, 8cm), 1.46 GB (DVD+RW, 8cm)  
**DVD Formats:** DVD-R version 1.0 and 2.0 (including multi-border); DVD-RW version 1.0 and 1.1; DVD+R version 1.3 (including multi-session); DVD+R DL version 1.0; DVD+RW version 1.2

#### Write Methods

Disc-at-once, session-at-once, track-at-once, incremental fixed and variable packet, multi-session

### Technical Specifications - Optical Devices

<b>LightScribe Direct Disc Labeling Parameters</b>	<b>Media Supported</b>	<b>CD-R:</b> LightScribe Version 1.0 <b>DVD+R:</b> LightScribe Version 1.0
	<b>Resolution</b>	<b>Dots per inch:</b> 600 <b>Tracks per inch:</b> 500-1600 (mode dependent)
<b>Access Times</b> (typical reads, including settling)	<b>Labeling Times</b>	<b>Draft quality:</b> < 20 min <b>Normal quality:</b> < 28 min <b>Best quality:</b> < 36 min
	<b>Random DVD</b>	< 130 ms (typical)
	<b>Random CD</b>	< 120 ms (typical)
	<b>Full Stroke DVD</b>	< 240 ms
	<b>Full Stroke CD</b>	< 200 ms
	<b>Startup Time (single)</b>	< 7 seconds (typical)
	<b>Startup Time (multi-session)</b>	< 30 seconds (typical)
	<b>Stop Time (typical)</b>	< 4 s
	<b>Cache Buffer</b>	2 MB
	<b>Data Transfer Modes</b>	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s); ATA UltraDMA Mode 3 (44.4 MB/s) (default on most HP xw series workstations)
<b>Power</b>	<b>Source</b>	Four-pin, DC power receptacle
	<b>DC Power Requirement</b>	5 VDC $\pm$ 5%-100 mV ripple p-p 12 VDC $\pm$ 5%-200 mV ripple p-p
	<b>DC Current</b>	5 VDC (< 1000 mA typical, < 1600 mA maximum) 12 VDC (< 600 mA typical, < 1400 mA maximum)
	<b>Total Drive Power (standby mode)</b>	< 2.5 Watt
<b>Audio Output</b>	<b>Line-Out</b>	0.7 VRMS
	<b>Signal-to-Noise Ratio</b>	74 dB
	<b>Channel Separation</b>	65 dB
<b>Operating Conditions</b> (all conditions non-condensing)	<b>Temperature</b>	41° to 122° F (5° to 50° C)
	<b>Relative humidity</b>	10% to 90%
	<b>Maximum wet bulb temperature</b>	86° F (30° C)
<b>Certifications, Approvals</b>	MMC-4 compliant, multi-read compliant, Microsoft WHQL certification, ACA AS/NZS 3548 class B, BSMI CNS 13438, CE Mark, C.I.S.P.R. Pub 22, TUV or VDE EN60950, EN 55022, EN55024, EMKO EN60950, EN 60825-1, UL 60950, CSA C22.2 60950-2000, CFR 21 part 1040 class 1, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, ANSI C63.4-1992 (FCC Class B), relevant parts of IEC 61000-4.	
<b>Operating Systems Supported</b>	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition Red Hat Linux 7.3 WS3 and WS4 Versions (LightScribe labeling functionality not supported on Linux)	

### Technical Specifications - Optical Devices

**Supplied Software** (for Windows XP) Roxio Cineplayer Movie Playback  
Roxio Digital Media Plus: Create or copy CDs and DVDs, including music and data CDs, and data DVDs  
Roxio MyDVD for DVD authoring

**NOTE:** LightScribe Direct Disc Labeling is supported only on 32-bit Windows XP in the launch timeframe for the xw4300. Support for Windows XP Professional x64 Edition is anticipated to be available some time after the launch, and will require software updates. There is no support for LightScribe labeling under Linux. The drive will operate as a DVD writer under these other operating systems, but will not be available in software applications as a LightScribe "printer".

**NOTE:** This DVD writer kit does not include any software for burning DVDs on Linux. DVD burning is supported with the 'growisofs' command. CD burning is supported with the 'cdrecord' command. Red Hat Enterprise Linux WS 3 distribution includes both 'cdrecord' and 'growisofs'. Red Hat Linux 8, 9.0 distributions only include 'cdrecord'. Therefore DVD burning is only supported on WS 3.

### Technical Specifications - Graphics

<b>NVIDIA Quadro NVS 285 with TurboCache Technology PCIe Graphics</b>	<b>Form Factor</b>	NVIDIA Quadro NVS 285 with TurboCache Technology 128MB PCIe Dual Head Low profile, both ATX and low profile brackets included
	<b>Graphics Controller</b>	Integrated Quadro 285 2D graphics processor unit (GPU)
	<b>Bus Type</b>	PCI-Express
	<b>Memory</b>	128 MB DDR (64 MB local frame buffer plus 64 MB of shared system memory via TurboCache technology) <b>NOTE:</b> The graphics card uses part of the total system memory (RAM) for graphics performance. System memory dedicated to graphics performance is not available for other use by other programs.
	<b>Connectors</b>	DMS-59 to dual-DVI Y-cable or dual-VGA Y-cable
	<b>Dimensions</b>	Low-profile, 2.586 x 6.6 in (6.57 x 16.76 cm)
	<b>Overlay planes</b>	One 16-bit Video overlay plane
	<b>Multi-monitor support</b>	Dual analog or digital monitors
	<b>Maximum pixel clock</b>	350 MHz
	<b>RAMDAC</b>	Dual 350 MHz (integrated)
	<b>High-definition Video Processor (HDVP)</b>	Full screen, full frame video playback of HDTV and DVD content DVD-ready motion compensation for MPEG-2 Independent hardware color controls for video overlay Hardware color-space conversion (YUV 4:2:2 and 4:2:0) IDCT motion compensation 5-tap horizontal by 3-tap vertical filtering 8:1 up/down scaling
	<b>Available graphics drivers</b>	Microsoft Windows 2000 and Microsoft Windows XP (Provides full native Dual View mode, Span or Big Desktop mode, and Clone mode) HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://www.hp.com/country/us/en/support.html?pageDisplay=drivers">http://www.hp.com/country/us/en/support.html?pageDisplay=drivers</a>

<b>ATI FireGL V3100 Graphics Card (PCI Express)</b>	<b>Form factor</b>	ATX
	<b>Graphics controller</b>	RV370
	<b>Bus type</b>	PCI-Express x16
	<b>Memory</b>	128 MB 200MHz DDR unified frame buffer, Z-buffer and Texture storage
	<b>Connectors</b>	1 DVI-I analog/digital and 1 VGA analog monitor output
	<b>Multi-monitor support</b>	Dual integrated display controllers supporting up to 2048x1536 @ 85Hz on both displays
	<b>RAMDAC</b>	Dual 400 MHz integrated



### Technical Specifications - Graphics

<b>Architecture features</b>	<ul style="list-style-type: none"> <li>128-bit memory interface</li> <li>128-bit IEEE floating-point precision</li> <li>24-bits per RGBA color precision</li> <li>4-bit sub-pixel precision</li> <li>2 parallel geometry engines</li> <li>4 parallel pixel pipelines</li> <li>2x/4x/6x FSAA</li> <li>Hardware accelerated antialiased points and lines</li> <li>Hardware OpenGL overlay planes</li> <li>Hardware accelerated two-sided lighting</li> <li>Hardware accelerated clipping planes</li> <li>Hardware accelerated occlusion culling</li> <li>Hardware accelerated clip planes</li> </ul>
<b>Shading architecture</b>	<ul style="list-style-type: none"> <li>Smartshader™ technology</li> <li>Programmable pixel and vertex shaders</li> <li>16 textures per pass</li> <li>Pixel shaders up to 160 instructions with 32-bit floating point precision for each RGBA component</li> <li>Multiple render target support</li> <li>Shadow volume rendering acceleration</li> <li>High precision 10-bit per channel frame buffer support</li> </ul>
<b>Supported graphics APIs</b>	<ul style="list-style-type: none"> <li>OpenGL 1.5</li> <li>DirectX 9.0</li> </ul>
<b>Available graphics drivers</b>	<ul style="list-style-type: none"> <li>Windows XP Professional, Windows XP Professional x64 Edition, Linux Xfree86HP qualified drivers may be preloaded or available from the HP support Web site:</li> <li><a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a>.</li> </ul>
<b>Maximum resolution</b>	<ul style="list-style-type: none"> <li>DVI-I output – drives digital display at resolutions up to 1600x1200</li> <li>Internal 400MHz RAMDACs – drives dual analog displays up to 2048x1536 @ 85Hz each</li> </ul>

---

<b>NVIDIA Quadro FX 540 PCI-Express Graphics Card</b>	<b>Form Factor</b>	ATX, 4.376" x 7.0" Single slot
	<b>Graphics Controller</b>	NVIDIA NV43GL
	<b>Bus Type</b>	PCI-Express x16, <75W power consumption
	<b>RAMDAC</b>	Dual 400 MHz integrated
	<b>Memory</b>	128 MB 275 MHz DDR SDRAM unified frame buffer, Z-buffer and Texture storage 8.8 GB/sec graphics memory bandwidth
	<b>Connectors</b>	DVI-I + VGA + 10-pin HDTV Out (HD cable purchased separately)
	<b>Multi-monitor support</b>	Integrated analog display controller supporting a single analog display at 2048x1536 @ 75Hz, one digital display at 1600x1200 @ 60Hz.

### Technical Specifications - Graphics

<b>Additional product features</b>	<p>128 KB BIOS 3.3V Flash ROM reprogrammable by SW</p> <p>Hardware accelerated Overlay Planes</p> <p>Hardware accelerated two-sided lighting</p> <p>Hardware accelerated antialiased points and lines</p> <p>3D Volumetric Texture support</p> <p>Hardware accelerated Occlusion Culling</p> <p>Compliant with Microsoft/Intel PC2001 Workstation requirements</p> <p>Video Timings compliant with VESA DMT 1.0 and VESA GTF 1.0 specifications</p> <p>DDC2B+ Monitor support on all OS platforms</p> <p>ACPI Version 1.0b Power Management support (all modes)</p>
<b>Shading architecture</b>	<p>Fully programmable GPU (OpenGL 1.5/DirectX 9.0c class)</p> <p>Long fragment programs (up to 65,536 instructions)</p> <p>Long vertex programs (up to 65,536 instructions)</p> <p>Looping and subroutines (up to 256 loops per vertex program)</p> <p>Dynamic flow control</p> <p>Conditional execution</p> <p>Optimized compilers for Cg, OpenGL shading language, and Microsoft HLSL</p>
<b>Supported graphics APIs</b>	<p>OpenGL 1.5 ICD with immediate mode support for all OGL primitive types</p> <p>DirectX 9.0c</p>
<b>Available graphics drivers</b>	<p>HP-tested: Microsoft Windows XP, Windows 2000, and Linux</p> <p>HP qualified drivers may be preloaded or available from the HP support Web site:</p> <p><a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a>.</p>
<b>Maximum Resolution</b>	<p>DVI-I output - drives digital display at resolutions up to 1600x1200 @ 60Hz</p> <p>Internal 400MHz RAMDACs – drives dual analog display up to 2048x1536 @ 75Hz each</p>

<b>NVIDIA Quadro FX 1400 PCI-Express Graphics Controller</b>	<b>Form Factor</b>	ATX, 4.376" x 8.5" Single slot
	<b>Graphics Controller</b>	NVIDIA NV41GL
	<b>Bus Type</b>	PCI-Express x16, <75W power consumption
	<b>RAMDAC</b>	Dual 400 MHz integrated
	<b>Memory</b>	128 MB 300 MHz DDR SDRAM unified frame buffer, Z-buffer and Texture storage 19.2 GB/s graphics memory bandwidth
	<b>Connectors</b>	2 DVI-I analog/digital monitor outputs, 1 3-pin Mini DIN stereo output
<b>Multi-monitor support</b>	Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays.	

### Technical Specifications - Graphics

<b>Additional product features</b>	<p>128 KB BIOS 3.3V Flash ROM reprogrammable by SW</p> <p>Hardware accelerated Overlay Planes</p> <p>Hardware accelerated two-sided lighting</p> <p>Hardware accelerated antialiased points and lines</p> <p>Quad-buffered Stereo</p> <p>3D Volumetric Texture support</p> <p>Hardware accelerated Occlusion Culling</p> <p>Scalable Link Interface (SLI) technology</p> <p>Compliant with Microsoft/Intel PC2001 Workstation requirements</p> <p>Video Timings compliant with VESA DMT 1.0 and VESA GTF 1.0 specifications</p> <p>DDC2B+ Monitor support on all OS platforms</p> <p>ACPI Version 1.0b Power Management support (all modes)</p>
<b>Shading architecture</b>	<p>Fully programmable GPU (OpenGL 1.5/DirectX 9.0c class)</p> <p>Long fragment programs (up to 65,536 instructions)</p> <p>Long vertex programs (up to 65,536 instructions)</p> <p>Looping and subroutines (up to 256 loops per vertex program)</p> <p>Dynamic flow control</p> <p>Conditional execution</p> <p>Optimized compilers for Cg, OpenGL shading language, and Microsoft HLSL</p>
<b>Supported graphics APIs</b>	<p>OpenGL 1.5 ICD with immediate mode support for all OGL primitive types</p> <p>DirectX 9.0c</p>
<b>Available graphics drivers</b>	<p>HP-tested: Microsoft Windows XP, Windows 2000 and Linux</p> <p>HP qualified drivers may be preloaded or available from the HP support Web site:</p> <p><a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a>.</p>
<b>Maximum Resolution</b>	<p>Dual DVI-I output – drives dual digital displays at resolutions up to 1900x1200 @ 60Hz</p> <p>Internal 400MHz RAMDACs – drives dual analog displays up to 2048x1536 @ 85Hz each</p>

<b>NVIDIA Quadro NVS 440 256 MB Graphics Controller</b>	<b>Form Factor</b>	ATX
	<b>Graphics Controller</b>	2 nv43 2D graphics processor units (GPUs)
	<b>VGA controller</b>	Integrated into the Quadro GPU
	<b>Bus Type</b>	PCI-E x16
	<b>RAMDAC</b>	Dual 350 MHz
	<b>Memory</b>	256 MB DDR frame buffer and Texture storage (128MB per GPU)
	<b>Connector</b>	Two DMS-59
	<b>Controller clock speed</b>	250 MHz
	<b>Color planes</b>	32-bit color buffer
	<b>Overlay planes</b>	1 16-bit Video overlay plane
	<b>Maximum pixel clock</b>	350 MHz
	<b>Multi-Monitor Support</b>	Up to 4 analog or digital monitors
	<b>Single DVI Support</b>	Yes
<b>Dual DVI Support</b>	Yes	

### Technical Specifications - Graphics

<b>High-definition Video Processor (HDVP)</b>	<p>Full-screen, full-frame video playback of HDTV and DVD content</p> <p>DVD-ready motion compensation for MPEG-2</p> <p>Independent hardware color controls for video overlay</p> <p>Hardware color-space conversion (YUV 4:2:2 and 4:2:0)</p> <p>IDCT motion compensation</p> <p>5-tap horizontal by 3-tap vertical filtering</p> <p>8:1 up/down scaling</p>
<b>Available graphics drivers</b>	<p>Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP (Provides full native Dual View mode, Span or Big Desktop mode, and Clone mode )</p> <p>HP qualified drivers may be preloaded or available from the HP support Web site:</p> <p><a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a>.</p>

<b>NVIDIA Quadro FX 3400 Graphics Card</b>	<b>Form Factor</b>	ATX
	<b>Graphics Controller</b>	NVIDIA NV45GL
	<b>Bus Type</b>	PCI-Express x16
	<b>Memory</b>	256 MB 450 MHz GDDR3 SDRAM unified frame buffer, Z-buffer and Texture storage
	<b>Connectors</b>	2 DVI-I (one dual-link/one single-link) analog/digital monitor outputs, 1 3-pin Mini DIN stereo output
	<b>Multi-monitor support</b>	<p>Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays or dual digital displays at 1600x1200 (single-link) and 3840x2400 (dual-link).</p> <p>NVIEW advanced multi-display desktop and application management seamlessly integrated into Microsoft Windows</p>
	<b>RAMDAC</b>	Dual 400 MHz integrated
	<b>Architecture features</b>	<p>256-bit memory interface</p> <p>128-bit IEEE floating-point precision graphics pipeline</p> <p>128-bit color precision</p> <p>12-bit sub-pixel precision</p> <p>8x FSAA at 1920x1200, 4x at 2048x1536, rotated grid FSAA sampling algorithm</p> <p>Hardware accelerated antialiased points and lines</p> <p>Hardware OpenGL overlay planes</p> <p>Hardware accelerated two-sided lighting</p> <p>Hardware accelerated clipping planes</p> <p>3rd generation occlusion culling</p> <p>3D volumetric texture support</p> <p>Quad-buffered stereo</p> <p>Dual Link DVI enabling driving digital displays up to 3840x2400 (24Hz)</p>
	<b>Shading architecture</b>	<p>Fully programmable GPU</p> <p>Long fragment programs (up to 65,536 instructions)</p> <p>Long vertex programs (up to 65,536 instructions)</p> <p>Looping and subroutines (up to 256 loops per vertex program)</p> <p>Dynamic flow control</p> <p>Conditional execution</p>
	<b>Supported graphics APIs</b>	<p>OpenGL 1.5</p> <p>DirectX 9.0</p>

### Technical Specifications - Graphics

<b>Available graphics drivers</b>	HP-tested: Microsoft Windows® XP, Windows 2000, and Linux HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a> .
<b>Maximum Resolution</b>	Dual DVI-I output – drives dual digital displays at resolutions up to 1600x1200 @ 60Hz (single-link) and 3840x2400 @ 24Hz (dual-link). Internal 400MHz RAMDACs – drives dual analog displays up to 2048x1536 @ 75Hz each

#### NVIDIA Quadro FX 3450 Graphics Controller

<b>Form Factor</b>	ATX
<b>Graphics Controller</b>	NVIDIA Quadro FX 3450 Workstation GPU
<b>Bus Type</b>	PCI-Express x16
<b>Memory</b>	256 MB 450 MHz GDDR3 SDRAM unified graphics memory
<b>Connectors</b>	2 DVI-I (one dual-link/one single-link) analog/digital monitor outputs, 1 3-pin Mini DIN stereo output, DVI-I to VGA adapters included
<b>Multi-Monitor Support</b>	Dual integrated display controllers supporting up to two analog displays at 2048 x 1536 @ 75 Hz on both displays or dual digital displays at 1920 x 1200 (single-link) and 3840 x 2400 (dual-link). NVIEW advanced multi-display desktop and application management seamlessly integrated into Microsoft Windows
<b>Architecture Features</b>	256-bit memory interface 128-bit IEEE floating-point color precision 12-bit sub-pixel precision 65,536 fragment instruction 65,536 vertex instruction 3D volumetric textures Single-system powerwall 12 pixels per clock rendering engine Hardware accelerated antialiased points and lines Hardware OpenGL overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes 3rd generation occlusion culling 16 textures per pixel in fragment programs Window ID clipping functionality Hardware accelerated line stippling OpenGL Quad-buffered stereo
<b>Shading Architecture</b>	Fully programmable GPU (OpenGL 2.0/DirectX 9.0c class) Long fragment programs (up to 65,536 instructions) Long vertex programs (up to 65,536 instructions) Looping and subroutines (up to 256 loops per vertex program) Dynamic flow control Conditional execution
<b>High Level Shader Languages</b>	Optimized compiler for Cg and Microsoft® HLSL OpenGL 2.0 and DirectX 9.0c support Open source compiler
<b>High-Resolution Antialiasing</b>	12-bit subpixel sampling precision enhances AA quality Rotated-grid full-scene antialiasing (RG FSAA) 8x FSAA dramatically reduces visual aliasing artifacts or "jaggies" at resolution up to 1920x1200

### Technical Specifications - Graphics

<b>Display Resolution Support</b>	Dual Link DVI- I output-drives digital displays at resolutions up to 3840 x 2400 @ 24 Hz Single Link DVI-I output drives digital displays at resolutions up to 1920 x 1200 @ 75 Hz Internal 400 MHz DACs - Two analog displays up to 2048 x 1536 @ 75 Hz each
<b>nView Architecture</b>	Advanced multi-display desktop & application management seamlessly integrated into Microsoft Windows.
<b>Supported Graphics APIs</b>	OpenGL 2.0 ICD with immediate mode support for all OGL primitive types DirectX 9.0c
<b>Available Graphics Drivers</b>	Microsoft Windows XP, Linux - Full Open GL implementation, complete with NVIDIA and ARB extensions. HP qualified drivers may be preloaded or available from the HP support web site: <a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a> .

<b>ATI FireGL V5100 PCI-Express Graphics Controller</b>	<b>Form Factor</b>	ATX
	<b>Graphics Controller</b>	RV423
	<b>Bus Type</b>	PCI-Express x16
	<b>Memory</b>	128 MB 350MHz DDR unified frame buffer, Z-buffer and Texture storage
	<b>Connectors</b>	2 DVI-I analog/digital monitor outputs, 1 3-pin Mini DIN stereo output
	<b>Multi-monitor support</b>	Dual integrated display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays.
	<b>RAMDAC</b>	Dual 400 MHz integrated
	<b>Architecture features</b>	256-bit memory interface 128-bit IEEE floating-point precision 24-bits per RGBA color precision 8-bit sub-pixel precision 6 parallel geometry engines 12 parallel pixel pipelines 2x/4x/6x FSAA Hardware accelerated antialiased points and lines Hardware OpenGL overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes Hardware accelerated occlusion culling Hardware accelerated clip planes Quad-buffered stereo
	<b>Shading architecture</b>	Smartshader™ technology Programmable pixel and vertex shaders 16 textures per pass Pixel shaders up to 160 instructions with 32-bit floating point precision for each RGBA component Multiple render target support Shadow volume rendering acceleration High precision 10-bit per channel frame buffer support
	<b>Supported graphics APIs</b>	OpenGL 1.5 DirectX 9.0

### *Technical Specifications - Graphics*

**Available graphics drivers**

HP-tested: Microsoft Windows XP, Windows 2000, and Linux  
HP qualified drivers may be preloaded or available from the HP support  
Web site: [http://welcome.hp.com/country/us/eng/software\\_drivers.html](http://welcome.hp.com/country/us/eng/software_drivers.html).

**Maximum Resolution**

DVI-I output – drives digital displays at resolutions up to 1600x1200  
Internal 400MHz RAMDAC – drives dual analog displays up to  
2048x1536 @ 85Hz each

### Technical Specifications - Monitors

<b>HP L1755 Flat Panel Monitor</b>	<b>Panel</b>	<b>Type</b>	Active matrix, thin film transistor (TFT)	
		<b>Viewable Image Area</b> (diagonal)	17 in (43.2 cm) maximum viewable	
		<b>Screen Opening</b> (WxH)	13.4 x 10.7 in (33.9 x 27.2 cm)	
		<b>Viewing Angle</b> (typical)	176 degrees horizontal/176 degrees vertical (10:1 minimum contrast ratio)	
		<b>Brightness</b> (typical)	Up to 250 nits (cd/m <sup>2</sup> )	
		<b>Contrast Ratio</b> (typical)	Up to 1000:1 (typical)	
		<b>Response Rate</b> (typical)	25 ms (typical rise + fall)	
		<b>Pixel Pitch</b>	0.264 mm	
		<b>Video/Other Inputs</b>	<b>Plug and Play</b>	Yes (supports VESA DDC2B; PC2001 compliant)
			<b>Self Powered USB 2.0 Hub</b>	One upstream, four downstream ports (cable included)
<b>Input Signal</b>	Two connectors: one 15-pin mini D-sub analog VGA; and one DVI-I (VGA analog or digital)			
<b>Input Impedance</b>	75 ohms ± 2%			
<b>Sync Input</b>	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green (activated through on-screen display)			
<b>Video Cable</b>	VGA to VGA, DVI-D to DVI-D, and DVI-I to VGA			
<b>Video Cable Length</b>	78 in (2.0 m)			
<b>Signal Interface/ Performance</b>	<b>Horizontal Frequency</b>		30 to 82 kHz	
	<b>Vertical Frequency</b>		56 to 75 Hz	
	<b>Native Resolution</b>		1280 x 1024 @ 60 Hz analog 1280 x 1024 @ 60 Hz digital	
	<b>Maximum Resolution</b> (Analog)	1280 x 1024 @ 75 Hz analog		
	<b>Maximum Resolution</b> (Digital)	1280 x 1024 @ 75 Hz digital		
	<b>Preset VESA Graphic Modes</b> (non-interlaced)	640 x 480 @ 60 Hz, 72 Hz, 75 Hz 720 x 400 @ 70 Hz 800 x 600 @ 60 Hz, 72 Hz, 75 Hz 1024 x 768 @ 60 Hz, 70 Hz, 75 Hz 1280 x 1024 @ 60 Hz, 75 Hz		
	<b>Preset MAC Mode</b>	832 x 624 @ 75 Hz 1152 x 870 @ 75 Hz		
	<b>Preset VGA Mode</b>	640 x 480 @ 60 Hz, 72 Hz		
	<b>Preset SUN Mode</b>	1152 x 900 @ 76 Hz		
	<b>Fail Safe Mode</b>	Yes (limits out of range signal messages)		
<b>Maximum Pixel Clock Speed</b>	140 MHz			



### Technical Specifications - Monitors

	<b>User Programmable Modes</b>	Yes, 15
	<b>Anti-Glare</b>	Yes
	<b>Anti-Static</b>	Yes
	<b>AssetControl</b>	Yes (accessible on HP Compaq Business Desktops featuring Intelligent Manageability)
	<b>Default Color Temperature</b>	Yes (6500k, 9300k, SRGB, Custom User)
<b>On Screen Display (OSD) Controls</b>	<b>Buttons or Switches</b>	Power on/off; 3-button OSD; second level OSD buttons include dual-input switch, dedicated auto adjust switch
	<b>Languages</b>	English, Spanish, French, German, Italian, Japanese, Simplified Chinese
	<b>User Controls</b>	Size and positioning, contrast, brightness, clock, clock phase, selectable color temperature, serial number, mode displayed, sleep timer, input selection, factory reset, individual color contrast, full-screen resolution
<b>Power</b>	<b>Power Supply</b>	Auto-ranging, 90 to 265 VAC; internal power supply
	<b>Input Power</b>	100 ~ 240 VAC
	<b>Nominal Current</b>	1.5 A maximum
	<b>Frequency</b>	50 ~ 60 Hz
	<b>Average</b>	33 watts when displaying standard office software
	<b>Typical Power Consumption</b>	< 40 watts
	<b>Maximum</b>	< 60 watts
	<b>Power Saving</b>	< 2 W
	<b>Off Mode</b>	0 watts (when master power switch is in the off position)
	<b>Power Cable Length</b>	70 in (1.8 m); non-captive

### Technical Specifications - Monitors

<b>Mechanical</b>	<b>Dimensions</b> (H x W x D)	<b>Unpacked with stand</b> 16.1 (minimum) to 21.2 (maximum) x 14.4 x 8.3 in (40.9 (minimum) to 42.2 (maximum) x 36.5 x 21.1 cm)	
		<b>Base Area</b> 8.3 x 12.2 in (Footprint D x W) (21.1 x 30.9 cm)	
		<b>Panel only</b> (without stand) (H x W x D) 11.8 x 14.4 x 2.9 in (30.1 x 40.9 x 7.3 cm)	
	<b>Weight</b>	<b>Unpacked with stand</b>	14.7 lb (6.7 kg)
		<b>Unpacked without stand</b>	8.1 lb (3.7 kg)
		<b>Packaged</b>	20.2 lb (9.2 kg)
	<b>Bezel Width</b>	13 mm left and right, 14 mm top, and 15 mm bottom	
	<b>Tilt Range</b>	-5° to +35°	
	<b>Swivel Range</b>	± 50° horizontal swivel	
	<b>Height Adjustable</b>	Yes (5.1 in/13 cm adjustment range)	
	<b>Pivot Rotation</b>	Yes, 90 °	
	<b>Base</b>	Ships detached and is removable after installation	
	<b>Environmental</b>	<b>Temperature – Operating</b>	41° to 95° F (5° to 35° C)
<b>Temperature – Non-operating</b>		-4° to 140° F (-20° to 60° C)	
<b>Humidity – Operating</b>		20% to 80%	
<b>Humidity – Non-operating</b>		5% to 95%	
<b>Altitude – Operating</b>		0 to 13,000 ft (0 to 4,000 m)	
<b>Altitude – Non-operating</b>		0 to 40,000 ft (0 to 12,192 m)	
<b>Options</b>		<b>HP Desktop Access Center – Part number: DK985A</b>	Features integrated microphone/headset jacks, dual function headset for phone/PC support, a MultiBay slot for adding an optical drive (sold separately), and four USB ports for easy integration of third-party digital solutions. Sold separately. For more information, refer to the HP Desktop Access Center QuickSpec document.
	<b>HP Flat Panel Speaker Bar – Part number: PF804AA</b>	Powered directly by the monitor, seamlessly attaches to the monitor's bezel to bring full multimedia support to select HP flat panel monitors. Features dual speakers with full sound range and external jack for headphones. Sold separately. For more information, refer to the HP Flat Panel Speaker Bar QuickSpec document.	

### Technical Specifications - Monitors

	<p><b>HP Compaq 7000 Series Ultra-slim Desktop Integrated Work Center Stand – Part number: DL641B</b></p>	<p>Allows mounting of a 15-, 17- or 19-inch HP flat panel monitor and an HP Compaq dc7100 Ultra-slim Desktop PC on a single stand for the convenience of an "all-in-one" form factor. Sold separately. For more information, refer to this product's QuickSpec document</p>
<p><b>Other</b></p>	<p><b>Accessories Included</b></p>	<p>VGA to VGA cable, DVI-D to DVI-D cable, DVI-I to VGA cable, USB cable, user CD-ROM with Pivot Pro software</p>
	<p><b>Software</b></p>	<p>Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese.</p>
	<p><b>Software</b></p>	<p>HP Display LiteSaver feature lets you schedule Sleep mode at preset times to help protect the display against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.</p>
	<p><b>User Guide Languages</b></p>	<p>English, Latin America Spanish, Brazilian Portuguese, Danish, Dutch, Finnish, French, German, Italian, Norwegian, Swedish, Greek, Polish, Russian, Slovenian, Turkish, Simplified Chinese, Traditional Chinese, Korean, and Japanese</p>
	<p><b>Warranty Languages</b></p>	<p>English, Canadian French, Latin America Spanish, Brazilian Portuguese, Danish, Dutch, Finnish, French, German, Italian, Norwegian, Spanish, Swedish, Bahasa Indonesian, Simplified Chinese, Traditional Chinese, and Korean</p>
	<p><b>Color</b></p>	<p>Carbonite, two-tone carbonite and silver (EMEA only)</p>
	<p><b>VESA Mounting</b></p>	<p>Yes (swing arm/wall mount not included); base must be removed for mounting options)</p>
	<p><b>VESA External Mounting</b></p>	<p>Yes (standard 4 hole pattern, 100 mm)</p>
	<p><b>Kensington Lock-ready</b></p>	<p>Yes</p>
<p><b>Certification and Compliance</b></p>		<p>Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCC Approval, CISPR Requirements, Eastern European Approvals, Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 13406-2 Compliant (Pixel Defect Guidelines), Mexican NOM Approval, MPR-II Compliant, PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 99 or 03 depending on region (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft Windows Certification</p>

### Technical Specifications - Monitors

<b>Compatibility</b>	VESA Video Signal Standard (VSIS) Compliant video cards have been tested and proven compatible for use with the HP L1755 Flat Panel Monitor. Recommended for use with HP products.
<b>Service and Warranty</b>	Limited three-year parts and repair labor, service provider labor, and on-site service. Next business day advanced exchange direct replacement service available during warranty period. Certain restrictions and exclusions apply. For details, contact HP Customer Support.

<b>HP L1955 Flat Panel Monitor</b>	<b>Panel</b>	<b>Type</b>	Active matrix, thin film transistor (TFT)
		<b>Viewable Image Area</b>	19 in (48.25 cm) maximum viewable (diagonal)
	<b>Video/Other Inputs</b>	<b>Screen Opening (WxH)</b>	14.9 x 12.0 in (38.0 x 30.5 cm)
		<b>Viewing Angle (typical)</b>	176 degrees horizontal/176 degrees vertical (10:1 minimum contrast ratio)
		<b>Brightness (typical)</b>	Up to 250 nits (cd/m <sup>2</sup> )
		<b>Contrast Ratio (typical)</b>	Up to 1000:1 (typical)
		<b>Response Rate (typical)</b>	<16 ms (typical rise + fall)
		<b>Pixel Pitch</b>	0.294 mm
		<b>Plug and Play</b>	Yes (supports VESA DDC2B; PC2001 compliant)
		<b>Self Powered USB 2.0 Hub</b>	One upstream, four downstream ports (cable included)
		<b>Input Signal</b>	Two connectors: one 15-pin mini D-sub analog VGA; and one DVI-I (VGA analog or digital)
		<b>Input Impedance</b>	75 ohms ± 2%
	<b>Sync Input</b>	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green (activated through on-screen display)	
	<b>Video Cable</b>	VGA to VGA, DVI-D to DVI-D, and DVI-I to VGA	
	<b>Video Cable Length</b>	78 in (2.0 m)	

### Technical Specifications - Monitors

<b>Signal Interface/ Performance</b>	<b>Horizontal Frequency</b>	30 to 82 kHz
	<b>Vertical Frequency</b>	56 to 75 Hz
	<b>Native Resolution</b>	1280 x 1024 @ 75 Hz analog 1280 x 1024 @ 60 Hz digital
	<b>Maximum Resolution (Analog)</b>	1280 x 1024 @ 75 Hz analog
	<b>Maximum Resolution (Digital)</b>	1280 x 1024 @ 75 Hz digital
	<b>Preset VESA Graphic Modes (non-interlaced)</b>	640 x 480 @ 60 Hz, 72 Hz, 75 Hz 720 x 400 @ 70 Hz 800 x 600 @ 60 Hz, 72 Hz, 75 Hz 1024 x 768 @ 60 Hz, 70 Hz, 75 Hz 1280 x 1024 @ 60 Hz, 75 Hz
	<b>Preset MAC Mode</b>	832 x 624 @ 75 Hz 1152 x 870 @ 75 Hz
	<b>Preset VGA Mode</b>	640 x 480 @ 60 Hz, 72 Hz
	<b>Preset SUN Mode</b>	1152 x 900 @ 76 Hz
	<b>Fail Safe Mode</b>	Yes (limits out of range signal messages)
	<b>Maximum Pixel Clock Speed</b>	140 MHz
	<b>User Programmable Modes</b>	Yes, 15
	<b>Anti-Glare</b>	Yes
	<b>Anti-Static</b>	Yes
	<b>AssetControl</b>	Yes (accessible on HP Compaq Business Desktops featuring Intelligent Manageability)
	<b>Default Color Temperature</b>	Yes (6500k, 9300k, SRGB, Custom User)
	<b>On Screen Display (OSD) Controls</b>	<b>Buttons or Switches</b>
<b>Languages</b>		English, Spanish, French, German, Italian, Japanese, Simplified Chinese
<b>User Controls</b>		Size and Positioning Contrast Brightness Clock, Clock Phase Selectable Color Temperature Serial Number Mode Displayed Sleep Timer Input Selection Factory Reset Individual Color Contrast Full-screen Resolution

### Technical Specifications - Monitors

<b>Power</b>	<b>Power Supply</b>	Auto-ranging, 90 to 265 VAC; internal power supply	
	<b>Input Power</b>	100 ~ 240 VAC	
	<b>Nominal Current</b>	1.5 A maximum	
	<b>Frequency</b>	50 ~ 60 Hz	
	<b>Average</b>	33 watts when displaying standard office software	
	<b>Typical Power Consumption</b>	< 40 watts	
	<b>Maximum</b>	< 60 watts	
	<b>Power Saving</b>	< 2 watts	
	<b>Off Mode</b>	0 watts (when master power switch is in the off position)	
		<b>Power Cable Length</b>	70 in (1.8 m); non-captive
	<b>Mechanical</b>	<b>Dimensions</b> (H x W x D)	<b>Unpacked with stand</b> 16.8 (minimum) to 22.3 (maximum) x 15.9 x 8.3 in (42.7 (minimum) to 56.6 (maximum) x 40.4 x 21.1 cm)
			<b>Base Area</b> 8.3 x 12.2 in (Footprint D x W) (21.1 x 30.9 cm)
			<b>Panel only</b> (without stand) (H x W x D) 13.2 x 15.9 x 3.1 in (33.5 x 40.4 x 7.9 cm)
		<b>Weight</b>	
		<b>Unpacked with stand</b> 16.5 lb (7.5 kg)	
		<b>Unpacked without stand</b> 10.5 lb (4.75 kg)	
		<b>Packaged</b> 23.5 lb (10.7 kg)	
		<b>Bezel Width</b> 13 mm left and right, 14 mm top, and 15 mm bottom	
		<b>Tilt Range</b> -5° to +35°	
		<b>Swivel Range</b> ± 50° horizontal swivel	
	<b>Height Adjustable</b> Yes (5.1 in/13 cm adjustment range)		
	<b>Pivot Rotation</b> Yes, 90 °		
	<b>Base</b> Ships detached and is removable after installation		
<b>Environmental</b>	<b>Temperature – Operating</b>	41° to 95° F (5° to 35° C)	
	<b>Temperature – Non-operating</b>	-4° to 140° F (-20° to 60° C)	
	<b>Humidity – Operating</b>	20% to 80%	
	<b>Humidity – Non-operating</b>	5% to 95%	
	<b>Altitude – Operating</b>	0 to 13,000 ft (0 to 4,000 m)	
	<b>Altitude – Non-operating</b>	0 to 40,000 ft (0 to 12,192 m)	

### Technical Specifications - Monitors

<b>Options</b>	<p><b>Desktop Access Center</b> Features integrated microphone/headset jacks, dual function headset for phone/PC support, a MultiBay slot for adding an optical drive (sold separately), and four USB ports for easy integration of third-party digital solutions. Sold separately; part number DK985A. For more information, refer to the HP Desktop Access Center QuickSpecs.</p> <p><b>HP Flat Panel Speaker Bar</b> Powered directly by the monitor, seamlessly attaches to the monitor's bezel to bring full multimedia support to select HP flat panel monitors. Features dual speakers with full sound range and external jack for headphones. Sold separately, part number PF804AA. For more information, refer to the HP Flat Panel Speaker Bar QuickSpecs.</p>
<b>Other</b>	<p><b>Accessories Included</b> VGA to VGA cable, DVI-D to DVI-D cable, DVI-I to VGA cable, USB cable, user CD-ROM with Pivot Pro software</p> <p><b>Software</b> Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese.</p> <p><b>Software</b> HP Display LiteSaver feature lets you schedule Sleep mode at preset times to help protect the display against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.</p> <p><b>User Guide Languages</b> English</p> <p><b>Warranty Languages</b> English</p> <p><b>Color</b> Carbonite, two-tone carbonite and silver (EMEA only)</p> <p><b>VESA Mounting</b> Yes (swing arm/wall mount not included); base must be removed for mounting options)</p> <p><b>VESA External Mounting</b> Yes (standard 4 hole pattern, 100 mm)</p> <p><b>Kensington Lock-ready</b> Yes</p> <p><b>Certification and Compliance</b> Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 13406-2 Compliant (Pixel Defect Guidelines), Mexican NOM Approval, MPR-II Compliant, PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 99 or 03 depending on region (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft® Windows® Certification</p>

### Technical Specifications - Monitors

<b>Compatibility</b>	VESA Video Signal Standard (VSIS) Compliant video cards have been tested and proven compatible for use with the HP L1955 Flat Panel Monitor. Recommended for use with HP products.
<b>Service and Warranty</b>	Limited three-year parts and repair labor, service provider labor, and on-site service. Next Business Day advanced exchange direct replacement service available during warranty period. Certain restrictions and exclusions apply. For details, contact HP Customer Support.

#### HP Flat Panel Monitor Panel L2035

<b>Type</b>	20-inch Active Matrix TFT (thin film transistor)
<b>Viewable Image Area</b> (diagonal)	20.1 in (51 cm)
<b>Screen Opening</b> (W x H)	16.2 x 12.17 in (41.1 x 30.9 cm)
<b>Viewing Angle</b> (typical)*	Up to 170° H/170° V (10:1 minimum contrast ratio)
<b>Brightness</b> (typical)*	Up to 250 nits (cd/m <sup>2</sup> )
<b>Contrast Ratio</b> (typical)*	Up to 400:1
<b>Response Rate</b> (typical)*	16 ms (typical, rise + fall)
<b>Pixel Pitch</b>	0.255 mm

\*All specifications are provided by the component manufacturers. Performance specifications represent the highest specification of all HP's component manufacturers' typical level specifications for performance. Actual performance may vary either higher or lower.

#### On Screen Display (OSD) Controls

<b>Buttons or Switches</b>	PiP (Picture in Picture), Input select, auto adjust, OSD up, OSD down, OSD menu select, power
<b>Languages</b>	English, French, German, Spanish, Italian
<b>User Controls</b>	Brightness, contrast, positioning, color temperature, individual color control, serial number display, full screen resolutions, clock, clock phase, video picture-in-picture (size and position), input selection (includes separate direct access key for dedicated swap between inputs 1 and 2), factory reset



### Technical Specifications - Monitors

<b>Signal Interface/ Performance</b>	<b>Horizontal Frequency</b>	30 to 94 kHz (VGA input); 30 to 92 KHz (DVI input) (for modes with pixel clock less than 157 MHz)	
	<b>Vertical Frequency</b>	48 to 85 Hz (VGA input); 30 to 92 KHz (DVI input) (for modes with pixel clock less than 157 MHz)	
	<b>Graphics Controller</b>	Pixelworks PW171	
	<b>Native Resolution</b>	1600 x 1200 @ 60 Hz (recommended)	
	<b>Preset VESA Graphic Modes (non-interlaced)</b>		1600 x 1200 @ 60 Hz, 75 Hz (VGA input)
			1280 x 1024 @ 60 Hz, 75 Hz, 85 Hz
			1280 x 960 @ 60 Hz
			1152 x 900 @ 66 Hz
			1024 x 768 @ 60 Hz, 75 Hz, 85 Hz
			800 x 600 @ 60 Hz, 85 Hz
			640 x 480 @ 60 Hz, 75 Hz, 85 Hz
		<b>Text Mode</b>	720 x 400 @ 70 Hz
		<b>Mac Mode</b>	1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz
		<b>Sun Mode</b>	1152 x 900 @ 66 Hz
	<b>Maximum Pixel Clock Speed</b>	202 MHz (VGA input); 162 MHz (DVI input)	
	<b>User Programmable Modes</b>	Yes, 10	
	<b>Anti-Glare</b>	Yes	
	<b>Anti-Static</b>	Yes	
	<b>Default Color Temperature</b>	6500 K	
	<b>Video Input</b>	<b>Plug and Play</b>	Yes
<b>Input Signal</b>		Four connectors, including one 15-pin mini D-sub VGA, one DVI-I (VGA analog and digital input), one composite video, and one s-video	
<b>Input Impedance</b>		75 ohms $\pm$ 10%	
<b>Sync Input</b>		Separate sync (HSYNC/VSYNC); composite sync, Sync on Green	
<b>Video Cable</b>		VGA to VGA; VGA to DVI-I; DVI-D to DVI-I	
<b>Video Cable Length</b>		5.9 ft (1.8 m)	
<b>Power</b>	<b>Input Power</b>	Auto-Ranging, 90 to 132 VAC and 195 to 265 VAC; internal power supply, 50 Hz/60 Hz	
	<b>Frequency</b>	47.5 to 63 Hz	
	<b>Maximum</b>	< 75 W	
	<b>Power Saving</b>	< 5 W	
	<b>Power Cable Length</b>	5.9 ft (1.8 m)	

### Technical Specifications - Monitors

<b>Mechanical</b>	<b>Dimensions (H x W x D)</b>	<b>Unpacked with stand</b>	17.36 to 20.9 x 17.8 x 8.27 in (44.1 to 53.1 x 45.2 x 21.0 cm)
		<b>Unpacked without stand (head only)</b>	14.29 x 17.8 x 3.19 in (36.3 x 45.2 x 8.1 cm)
		<b>Packaged</b>	11.5 x 21.9 x 23.9 in (29.2 x 55.6 x 60.6 cm)
	<b>Weight</b>	<b>Unpacked</b>	With stand: 20.28 lb (9.2 kg); Without stand: 12.35 lb (5.6 kg)
		<b>Packaged</b>	26.9 lb (12.2 kg)
		<b>Tilt Range</b>	-5° to + 25° vertical
		<b>Swivel Range</b>	-35° to + 35°
		<b>Height Adjustable</b>	Yes, range 3.54 in (9.0 cm)
		<b>Pivot Rotation</b>	Yes
		<b>Base</b>	Attached
<b>Environmental</b>	<b>Temperature – Operating</b>	46° to 95° F (10° to 35° C)	
	<b>Temperature – Non-operating</b>	6° to 140° F (-10° to 60° C)	
	<b>Humidity – Operating</b>	20% to 80% non-condensing	
	<b>Humidity – Non-operating</b>	5% to 85%	
	<b>Altitude – Operating</b>	+12,000 ft (+3,657.6 m)	
	<b>Altitude – Non-operating</b>	+40,000 ft (+12,192 m)	
<b>Options</b>	<b>HP Desktop Access Center</b>	Sold separately, the HP Desktop Access Center features integrated microphone/headset jacks, dual function headset for phone/PC support, a MultiBay slot for adding an optical drive (sold separately), and four USB ports for easy integration of third-party digital solutions; part number DK985A. For more information, refer to the HP Desktop Access Center QuickSpecs.	

### Technical Specifications - Monitors

<b>Other</b>	<p><b>Accessories Included</b> VGA to VGA cable – connects the graphic card's VGA analog connector to the monitor's input #1 (VGA analog) connector</p> <p>VGA to DVI-I cable – connects the graphic card's VGA connector to the monitor's input #2 (DVI-I analog) connector</p> <p>DVI-D to DVI-I cable – connects the graphic card's DVI-D digital connector to the monitor's input #2 (DVI-I digital) connector</p> <p><b>User Guide Languages</b> English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish</p> <p><b>Warranty Languages</b> English, Canadian French, LA Spanish, Brazilian Portuguese, Danish, German, Castilian Spanish, French, Italian, Dutch, Norwegian, Finnish, Swedish, Bahasa Indonesian, Korean, T. Chinese, S. Chinese</p> <p><b>Color</b> Carbonite/Silver</p> <p><b>VESA External Mounting</b> Yes (Standard 4 hole pattern, 100 mm)</p> <p><b>Kensington Lock-Ready</b> Yes</p>
<b>Certification and Compliance</b>	<p>Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, *Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 9241-3,7,8 VDT Guidelines, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval, MIC Requirements (New Zealand), MPR-II Compliant, Nordic Approvals (Nemko, Fimko, Demko, Semko), PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 03 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Windows Certification (Microsoft® Windows® 98, Microsoft Windows 2000, and Microsoft Windows XP)</p> <p>* <a href="#">Energy Star Compliant available summer 2004.</a></p>
<b>Compatibility</b>	<p>Compatible with platforms using the VESA standard video modes and HP Compaq Business Desktops d500, d300, and d200 Series, Compaq Evo Desktops, and HP Workstations</p>
<b>Service and Warranty</b>	<p>Limited three years parts, labor, and on-site service, including backlight. Availability varies by region. Certain restrictions and exclusions apply. Consult HP Customer Service for details.</p>

<b>HP Flat Panel Monitor LP2065</b>	<b>Panel</b>	<b>Type</b>	20-inch Active Matrix TFT (thin film transistor)
		<b>Viewable Image Area</b>	20.1 in (51 cm) (diagonal)
		<b>Screen Opening</b>	16.2 x 12.17 in (41.1 x 30.9 cm) (W x H)
		<b>Viewing Angle</b> (typical)*	Up to 178° horizontal/178° vertical (10:1 minimum contrast ratio)

### Technical Specifications - Monitors

	<b>Brightness</b> (typical*	Up to 300 nits (cd/m <sup>2</sup> )	
	<b>Contrast Ratio</b> (typical)*	Up to 800:1	
	<b>Response Rate</b> (typical)*	8 ms (gray to gray), 16 ms (rise + fall)	
	<b>Pixel Pitch</b>	0.255 mm	
	<b>Backlight Lamp Life</b> (to half brightness)	45K hours	
<b>On Screen Display (OSD) Controls</b>	<b>Buttons or Switches</b>	Input select, auto adjust/OSD up, OSD down, OSD menu select, power	
	<b>Languages</b>	English, French, German, Spanish, Italian, Dutch, and Japanese	
	<b>User Controls</b>	Brightness, contrast, positioning, color temperature, individual color control, serial number display, full screen resolutions, clock, clock phase, input selection, image control (including scaling), and factory reset	
<b>Signal Interface/ Performance</b>	<b>Horizontal Frequency</b>	30 to 94 kHz (VGA input); 30 to 92 KHz (DVI input for modes with pixel clock less than 157 MHz)	
	<b>Vertical Frequency</b>	48 to 85 Hz (VGA input); 30 to 92 KHz (DVI input for modes with pixel clock less than 157 MHz)	
	<b>Native Resolution</b>	1600 x 1200 @ 60 Hz (recommended)	
	<b>Preset VESA Graphic Modes</b> (non-interlaced)		1600 x 1200 @ 60 Hz, 75 Hz (VGA input)
			1280 x 1024 @ 60 Hz, 75 Hz, 85 Hz
			1280 x 960 @ 60 Hz
			1152 x 900 @ 66 Hz
			1024 x 768 @ 60 Hz, 75 Hz, 85 Hz
			800 x 600 @ 60 Hz, 85 Hz
			640 x 480 @ 60 Hz, 75 Hz, 85 Hz
		<b>Text Mode</b>	720 x 400 @ 70 Hz
		<b>Mac Mode</b>	1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz
		<b>Sun Mode</b>	1152 x 900 @ 66 Hz
	<b>Maximum Pixel Clock Speed</b>	202 MHz (VGA input); 162 MHz (DVI input)	
	<b>User Programmable Modes</b>	Yes, 10	
	<b>Anti-Glare</b>	Yes	
	<b>Anti-Static</b>	Yes	
	<b>Default Color Temperature</b>	6500 K	

### Technical Specifications - Monitors

<b>Video Input</b>	<b>Plug and Play</b>	Yes	
	<b>Input Signal</b>	Four connectors, including one 15-pin mini D-sub VGA, one DVI-I (VGA analog and digital input), one composite video, and one s-video	
	<b>Self Powered USB 2.0 Hub</b>	One upstream, four downstream ports (cable included)	
	<b>Input Signal</b>	Two DVI-I connectors (dual VGA analog or dual digital input possible)	
	<b>Input Impedance</b>	75 ohms $\pm$ 10%	
	<b>Sync Input</b>	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green	
	<b>Video Cable</b>	Two VGA to DVI-I; two DVI-D to DVI-I	
	<b>Video Cable Length</b>	5.9 ft (1.8 m)	
	<b>Power</b>	<b>Input Power</b>	Auto-Ranging, 90 to 132 VAC and 195 to 265 VAC; internal power supply, 50 Hz/60 Hz
		<b>Frequency</b>	47.5 to 63 Hz
<b>Typical Power Consumption</b>		55 watts (without USB ports); 70 watts (USB ports fully loaded)	
<b>Maximum</b>		< 75 W	
<b>Power Saving</b>		< 2 watts	
<b>Power Cable Length</b>		5.9 ft (1.8 m)	
<b>Mechanical</b>		<b>Dimensions (H x W x D)</b>	<b>Unpacked with stand</b> 16.7 to 21.8 x 17.4 x 8.67 in (42.5 to 55.5 x 44.3 x 22.0 cm)
		<b>Unpacked w/o stand</b> 13.58 x 17.4 x 3.42 in (head only) (34.5 x 44.3 x 8.7 cm)	
		<b>Packaged</b> 11.77 x 22.2 x 16.77 in (29.9 x 56.4 x 42.6 cm)	
	<b>Weight</b>	<b>Unpacked</b> With stand: 20.28 lb (9.2 kg); Without stand: 12.35 lb (5.6 kg)	
		<b>Packaged</b> 26.3 lb (11.95 kg)	
	<b>Tilt Range</b>	-5° to + 25° vertical tilt	
	<b>Swivel Range</b>	-45° to + 45°	
	<b>Height Adjustable</b>	Yes, range 5.1 in (13.0 cm)	
<b>Pivot Rotation</b>	Yes		
<b>Base</b>	Detachable, ships attached		

### Technical Specifications - Monitors

<b>Environmental</b>	<b>Temperature – Operating</b>	46° to 95° F (10° to 35° C)
	<b>Temperature – Non-operating</b>	6° to 140° F (-10° to 60° C)
	<b>Humidity – Operating</b>	20% to 80% non-condensing
	<b>Humidity – Non-operating</b>	5% to 85%
	<b>Altitude – Operating</b>	+12,000 ft (+3,657.6 m)
	<b>Altitude – Non-operating</b>	+40,000 ft (+12,192 m)
	<b>Options</b>	<b>HP Silver Flat Panel Speaker Bar - Part number: EE418AA</b>
<b>Other</b>	<b>Accessories Included</b>	VGA to DVI-I cable – connects the graphic card's VGA connector to the monitor's input #1 or 2 (DVI-I analog) connector.
		DVI-D to DVI-I cable – connects the graphic card's DVI-D digital connector to the monitor's input #1 or #2 (DVI-I digital) connector.
	<b>User Guide Languages</b>	English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish
	<b>Software</b>	HP Display Assistant Utility makes it possible to adjust displays settings through the PC using two-way communication via DDCI.
		HP Display Lite Saver allows ability to power up and down display at predetermined hours of the day to save power and backlight life.
	<b>User Guide Languages</b>	English
	<b>Warranty Languages</b>	English
	<b>Color</b>	Carbonite/Silver
	<b>VESA External Mounting</b>	Yes (Standard 4 hole pattern, 100 mm)

### Technical Specifications - Monitors

<b>Kensington Lock-Ready</b>	Yes
<b>Certification and Compliance</b>	Canadian Requirements/CSA, CE Marking, CISPR Requirements, , Energy Star Compliant, FCC Approval, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval,, MPR-II Compliant, PC2001 Compliant, PC99 Certified, TCO 03 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft Windows Certification (Microsoft Windows 98, Microsoft Windows 2000, and Microsoft Windows XP)
<b>Compatibility</b>	Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.
<b>Service and Warranty</b>	Three years parts, labor, and on-site service. 24-hour 365-day 1-800 technical support. Replacement options include 2nd business day on-site service or next business day direct replacement. With direct replacement, HP will ship a replacement display product directly to you. Using the shipping labels provided, return your failed display to HP. Certain restrictions and exclusions apply. For details, contact HP Customer Support.

#### HP Flat Panel Monitor Panel L2335

<b>Type</b>	23-inch Active Matrix TFT (thin film transistor)
<b>Viewable Image Area</b> (diagonal)	23 in (58.4 cm)
<b>Screen Opening</b> (W x H)	19.53 x 12.24 in (49.6 x 31.1 cm)
<b>Viewing Angle</b> (typical)*	Up to 170° H/170° V (10:1 minimum contrast ratio)
<b>Brightness</b> (typical)*	Up to 250 nits (cd/m <sup>2</sup> )
<b>Contrast Ratio</b> (typical)*	Up to 500:1
<b>Response Rate</b> (typical)*	16 ms (typical, rise + fall)
<b>Pixel Pitch</b>	0.258 mm

\* All specifications are provided by the component manufacturers. Performance specifications represent the highest specification of all HP's component manufacturers' typical level specifications for performance. Actual performance may vary either higher or lower.

#### On Screen Display (OSD) Controls

<b>Buttons or Switches</b>	PiP (Picture in Picture), Input Select, Auto Adjust, OSD Up, OSD Down, OSD Menu Select, Power
<b>Languages</b>	English, French, German, Spanish, Italian
<b>User Controls</b>	Brightness, contrast, positioning, color temperature, individual color control, serial number display, full screen resolutions, clock, clock phase, video picture-in-picture (size and position), input selection (includes separate direct access key for dedicated swap between inputs 1 and 2), factory reset

### Technical Specifications - Monitors

<b>Signal Interface/ Performance</b>	<b>Horizontal Frequency</b>	30 to 94 kHz (VGA input); 30 to 92 KHz (DVI input) (for modes with pixel clock less than 157 MHz)	
	<b>Vertical Frequency</b>	48 to 85 Hz (VGA and DVI input)	
	<b>Graphics Controller</b>	Pixelworks PW172	
	<b>Native Resolution</b>	1920 x 1200 @ 60 Hz (recommended)	
	<b>Preset VESA Graphic Modes (non-interlaced)</b>		1920 x 1200 @ 60Hz
			1600 x 1200 @ 60 Hz, 75 Hz
			1280 x 1024 @ 60 Hz, 75Hz, 85 Hz
			1280 x 960 @ 60 Hz
			1152 x 900 @ 66 Hz
			1024 x 768 @ 60 Hz, 75 Hz, 85 Hz
			800 x 600 @ 60 Hz, 75Hz
			640 x 480 @ 60 Hz, 75 Hz
			720 x 400 @ 70 Hz
			1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz
	<b>Video Input</b>	<b>Text Mode</b>	720 x 400 @ 70 Hz
		<b>Mac Mode</b>	1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz
		<b>Sun Mode</b>	1152 x 900 @ 66 Hz
		<b>Maximum Pixel Clock Speed</b>	202 MHz (VGA input); 162 MHz (DVI input)
		<b>User Programmable Modes</b>	Yes, 10
		<b>Anti-Glare</b>	Yes
<b>Anti-Static</b>		Yes	
<b>Default Color Temperature</b>		6500 K	
<b>Plug and Play</b>		Yes	
<b>Input Signal</b>		Five connectors, including one 15-pin mini D-sub VGA, one DVI-I (VGA analog and digital input), one composite video, one s-video, component video	
<b>Power</b>	<b>Input Impedance</b>	75 ohms $\pm$ 10%	
	<b>Sync Input</b>	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green	
	<b>Video Cable</b>	VGA to VGA; VGA to DVI-I; DVI-D to DVI-I	
	<b>Video Cable Length</b>	5.9 ft (1.8 m)	
	<b>Input Power</b>	Auto-Ranging, 90 to 132 VAC and 195 to 265 VAC; internal power supply, 50 Hz/60 Hz	
	<b>Frequency</b>	47.5 to 63 Hz	
	<b>Maximum</b>	< 100 W	
	<b>Power Saving</b>	< 5 W	
	<b>Power Cable Length</b>	5.9 ft (1.8 m)	



### Technical Specifications - Monitors

<b>Mechanical</b>	<b>Dimensions (H x W x D) Unpacked</b>	17.36 (min) to 20.9 (max) x 21.46 x 8.27 in (44.1 (min) to 53.1 (max) x 54.5 x 21.0 cm)
	<b>Unpacked without stand (head only)</b>	14.57 x 21.46 x 3.35 in (37.0 x 54.5 x 8.5 cm)
	<b>Packaged</b>	11.5 x 25.75 x 23.86 in (29.2 x 65.4 x 60.6 cm)
	<b>Weight Unpacked</b>	22.27 lb (10.1 kg)
	<b>Weight Packaged</b>	30.87 lb (14.0 kg)
	<b>Tilt Range</b>	-5° to + 25° vertical
	<b>Swivel Range</b>	-35° to + 35°
	<b>Height Adjustable</b>	Yes, range 3.54 in (9.0 cm)
	<b>Pivot Rotation</b>	Yes
	<b>Base</b>	Attached
<b>Environmental</b>	<b>Temperature – Operating</b>	46° to 95° F (10° to 35° C)
	<b>Temperature – Non-operating</b>	6° to 140° F (-10° to 60° C)
	<b>Humidity – Operating</b>	20% to 80% non-condensing
	<b>Humidity – Non-operating</b>	5% to 85%
	<b>Altitude – Operating</b>	+12,000 ft (+3,657.6 m)
	<b>Altitude – Non-operating</b>	+40,000 ft (+12,192 m)
<b>Options</b>	<b>HP Desktop Access Center</b>	Sold separately, the HP Desktop Access Center Features integrated microphone/headset jacks, dual function headset for phone/PC support, a MultiBay slot for adding an optical drive (sold separately), and four USB ports for easy integration of third-party digital solutions; part number DK985A. For more information, refer to the HP Desktop Access Center QuickSpecs.

### Technical Specifications - Monitors

<b>Other</b>	<p><b>Accessories Included</b> VGA to VGA cable – connects the graphic card's VGA analog connector to the monitor's input #1 (VGA analog) connector</p> <p>VGA to DVI-I cable – connects the graphic card's VGA connector to the monitor's input #2 (DVI-I analog) connector</p> <p>DVI-D to DVI-I cable – connects the graphic card's DVI-D digital connector to the monitor's input #2 (DVI-I digital) connector</p> <p><b>User Guide Languages</b> English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish</p> <p><b>Warranty Languages</b> English, Canadian French, LA Spanish, Brazilian Portuguese, Danish, German, Castilian Spanish, French, Italian, Dutch, Norwegian, Finnish, Swedish, Bahasa Indonesian, Korean, T. Chinese, S. Chinese</p> <p><b>Color</b> Carbonite/silver</p> <p><b>VESA External Mounting</b> Yes (Standard 4 hole pattern, 100 mm)</p> <p><b>Kensington Lock-Ready</b> Yes</p>
<b>Certification and Compliance</b>	<p>Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, *Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 9241-3,7,8 VDT Guidelines, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval, MIC Requirements (New Zealand), MPR-II Compliant, Nordic Approvals (Nemko, Fimko, Demko, Semko), PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 03 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Windows Certification (Microsoft® Windows® 98, Microsoft Windows 2000, and Microsoft Windows XP).</p> <p>* <a href="#">Energy Star Compliant available summer 2004.</a></p>
<b>Compatibility</b>	<p>Compatible with platforms using the VESA standard video modes and HP Compaq Business Desktops d500, d300, and d200 Series, Compaq Evo Desktops, and HP Business Desktops d300 series.</p>
<b>Service and Warranty</b>	<p>Limited three years parts, labor, and on-site service, including backlight. Availability varies by region. Certain restrictions and exclusions apply. Consult HP Customer Service for details.</p>

<b>HP Flat Panel Monitor LP2465</b>	<b>Panel</b>	<b>Type</b>	24-inch Active Matrix TFT (thin film transistor)
		<b>Viewable Image Area</b>	24 in (60.96 cm) (diagonal)
		<b>Screen Opening</b>	20.47 x 12.83 in (52.0 x 32.6 cm) (W x H)
		<b>Viewing Angle</b> (typical)*	178° H/ 178° V (10:1 minimum contrast ratio)

### Technical Specifications - Monitors

	<b>Brightness (typical)*</b>	500 nits (cd/m <sup>2</sup> )	
	<b>Contrast Ratio (typical)*</b>	1000:1	
	<b>Response Rate (typical)*</b>	8 ms (typical gray to gray)	
	<b>Pixel Pitch</b>	0.270 mm	
	<b>Backlight Lamp Life (to half brightness)</b>	50K hours	
	<i>*Response time 13 ms rise and fall, 6 ms gray to gray.</i>		
<b>On Screen Display (OSD) Controls</b>	<b>Buttons or Switches</b>	Input Select, Auto Adjust, OSD Up, OSD Down, OSD Menu Select, Power	
	<b>Languages</b>	English, French, German, Spanish, Italian, Japanese, Dutch	
	<b>User Controls</b>	Brightness, contrast, positioning, color temperature, individual color control, serial number display, full screen resolutions, clock, clock phase, input selection (includes separate direct access key for dedicated swap between inputs 1 and 2), factory reset	
<b>Signal Interface/ Performance</b>	<b>Horizontal Frequency</b>	30 to 94 kHz (VGA input); 30 to 92 KHz (DVI input) (for modes with pixel clock less than 157 MHz)	
	<b>Vertical Frequency</b>	48 to 85 Hz (VGA and DVI input)	
	<b>Native Resolution</b>	1920 x 1200 @ 60 Hz (recommended) (native aspect ratio of 16:10)	
	<b>Preset VESA Graphic Modes (non-interlaced)</b>		1920 x 1200 @ 60 Hz
			1600 x 1200 @ 60 Hz, 75 Hz
			1280 x 1024 @ 60 Hz, 75 Hz, 85 Hz
			1280 x 960 @ 60 Hz
			1152 x 900 @ 66 Hz
			1024 x 768 @ 60 Hz, 75 Hz, 85 Hz
			800 x 600 @ 60 Hz, 75 Hz
		640 x 480 @ 60 Hz, 75 Hz	
		<b>Text Mode</b>	720 x 400 @ 70 Hz
		<b>Mac Mode</b>	1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz
	<b>Sun Mode</b>	1152 x 900 @ 66 Hz	
	<b>Maximum Pixel Clock Speed</b>	202 MHz (VGA input); 162 MHz (DVI input)	
	<b>User Programmable Modes</b>	Yes, 20	
	<b>Anti-Glare</b>	Yes	
	<b>Anti-Static</b>	Yes	
	<b>Default Color Temperature</b>	6500 K	

### Technical Specifications - Monitors

<b>Video/Other Inputs</b>	<b>Plug and Play</b>	Yes	
	<b>Self Powered USB 2.0 Hub</b>	One upstream, four downstream ports (located on side of monitor, cable included)	
	<b>Input Signal</b>	Two DVI-I (VGA analog and digital) inputs	
	<b>Input Impedance</b>	75 ohms ± 10%	
	<b>Sync Input</b>	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green	
	<b>Video Cable</b>	VGA to DVI-I; DVI-D to DVI-D	
	<b>Video Cable Length</b>	5.9 ft (1.8 m)	
	<b>Power</b>	<b>Input Power</b>	Auto-Ranging, 90 to 132 VAC and 195 to 265 VAC; internal power supply, 50 Hz/60 Hz
		<b>Frequency</b>	47.5 to 63 Hz
		<b>Typical Power Consumption</b>	75 watts
<b>Maximum</b>		< 110 watts	
<b>Power Saving</b>		< 2 watts	
<b>Power Cable Length</b>		6.2 ft (1.9 m)	
<b>Mechanical</b>	<b>Dimensions (H x W x D)</b>	<b>Unpacked w/ stand</b> 14.6 (min) to 19.7 (max) x 22 x 9.1 in (37.1 (min) to 50.1 (max) x 55.4 x 23.2 cm)	
		<b>Unpacked w/o stand (head only)</b> 14.4 x 22 x 3.7 in (36.6 x 55.84 x 9.2 cm)	
		<b>Packaged</b> 11.7 x 22.1 x 25.6 in (29.8 x 56.0 x 65.1 cm)	
	<b>Weight</b>	<b>Unpacked</b> 23.6 lbs (10.7 kg)	
		<b>Packaged</b> 23.6 lbs (10.7 kg)	
	<b>Tilt Range</b>	-5° to + 25° vertical	
	<b>Swivel Range</b>	-45° to + 45°	
	<b>Height Adjustable</b>	Yes, range 5.1 in (130 mm)	
	<b>Pivot Rotation</b>	Yes	
	<b>Environmental</b>	<b>Base</b>	Detachable, ships detached
<b>Temperature – Operating</b>		46° to 95° F (10° to 35° C)	
<b>Temperature – Non-operating</b>		6° to 140° F (-10° to 60° C)	
<b>Humidity – Operating</b>		20% to 80% non-condensing	
<b>Humidity – Non-operating</b>		5% to 85%	
<b>Altitude – Operating</b>		+12,000 ft (+3,657.6 m)	
<b>Altitude – Non-operating</b>		+40,000 ft (+12,192 m)	
<b>Other</b>		<b>Accessories Included</b>	VGA to DVI-I cable – connects the graphic

		card's VGA connector to the monitor's input #2 (DVI-I analog) connector DVI-D to DVI-D cable – connects the graphic card's DVI-D digital connector to the monitor's input #2 (DVI-I digital) connector
	<b>Software</b>	Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese. HP Display Assistant is a software utility that allows monitor adjustment, color calibration, and security/asset management using the Display Data Channel Command Interface (DDC/CI) protocol of the connected desktop PC. HP Display LiteSaver feature allows you to schedule Sleep mode at preset times to help protect the monitor against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.
	<b>User Guide Languages</b>	English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish
	<b>Warranty Languages</b>	English, Canadian French, LA Spanish, Brazilian Portuguese, Danish, German, Castilian Spanish, French, Italian, Dutch, Norwegian, Finnish, Swedish, Bahasa Indonesian, Korean, T. Chinese, S. Chinese
	<b>Color</b>	Carbonite/silver
	<b>VESA External Mounting</b>	Yes (Standard 4 hole pattern, 100 mm)
	<b>Kensington Lock-Ready</b>	Yes
<b>Options</b>	<b>HP Silver Flat Panel Speaker Bar - Part number: EE418AA</b>	Powered directly by the monitor or PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP flat panel monitors. Features include dual speakers with full sound range and an external jack for headphones. Sold separately. For more information, refer to the HP Flat Panel Speaker Bar QuickSpec.

### Technical Specifications - Monitors

**Certification and Compliance**

Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 9241-3,7,8 VDT Guidelines, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval, MIC Requirements (New Zealand), MPR-II Compliant, Nordic Approvals (Nemko, Fimko, Demko, Semko), PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 03 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft Windows Certification (Microsoft Windows 98, Microsoft Windows 2000, and Microsoft Windows XP)

**Compatibility**

Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.

**Service and Warranty**

Three years parts, labor, and on-site service. 24-hour, 90-day, toll-free technical support. Replacement options may include second business day on-site service, or next business day direct replacement, at HP's sole discretion. With direct replacement, HP will ship a replacement display product directly to you. Using the prepaid shipping labels provided, return your failed display to HP in the same packaging as the replacement. Certain restrictions and exclusions apply. For details see your product warranty or contact HP Customer Support.

---

© Copyright 2007 Hewlett-Packard Development Company, L.P.

All rights reserved. HP and the HP logo are trademarks of the Hewlett Packard Company in the U.S. and/or other countries.

Microsoft, Windows, Windows Vista, and Windows XP are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. NVIDIA and Quadro are trademarks of NVIDIA Corporation. All other product names mentioned herein may be trademarks of their respective companies.

HP shall not be liable for technical or editorial errors or omissions contained herein. The information is provided as is without warranty of any kind and is subject to change without notice. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty